CLICK TO CONTACT US

THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO GENESIS FILTRATION CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT IN WHOLE OR IN PART IS EXPRESSLY PROHIBITED EXCEPT AS GENESIS FILTRATION CORPORATION MAY OTHERWISE AGREE TO IN WRITING.

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

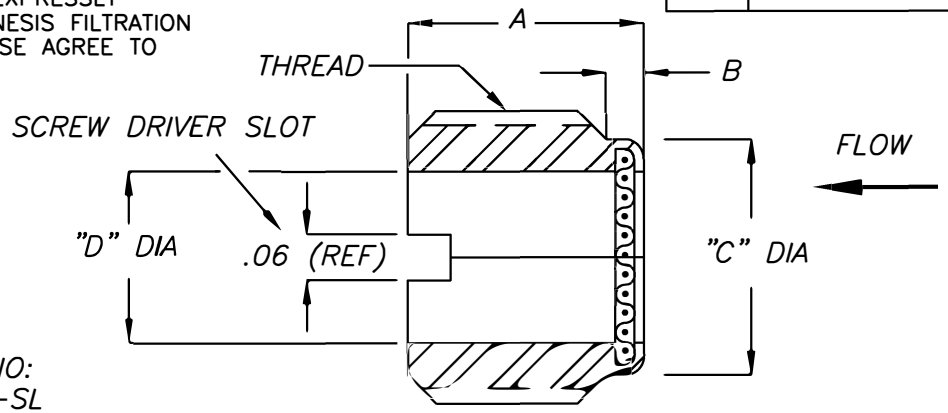

-2 DASH NO.	NOMINAL MICRON RATING	ABSOLUTE MICRON RATING
- 2	2	15
- 5	5	18
- 10	10	25
- 20	20	45
- 40	40	70
- 70	70	105
-105	105	150
-145	145	205

EXAMPLE PART NO:
10261-4-10-D-SL

-4 SIZE

ADD "SL" TO PART NO FOR SELF LOCKING PATCH OPTION

ADD "D" TO PART NO FOR ALUM HOUSING OPTION.

10 MICRONS NOMINAL

-1 SIZE	THREAD T	A	B	C	D
- 3	3/8-24	.21	.06	.313	.22
- 4	7/16-20	.27	.07	.365	.27
- 5	1/2-20	.27	.07	.427	.33
- 6	9/16-18	.29	.07	.482	.39
- 8	3/4-16	.33	.08	.659	.56
-10	7/8-14	.36	.09	.772	.67
-12	1 1/16-12	.43	.10	.945	.85

6. SELF LOCKING PATCH AVAILABLE.
5. MATERIALS: FILTER DISC, AISI T 300 SER. CRES.
   INSERT: AISI T 300 SER. CRES OR ALUM ALLOY ANODIZED.
4. CONSTRUCTION: FILTER DISC IS SPIN SWAGED INTO INSERT.
3. FILTER MEDIA: SINTERED STAINLESS STEEL WOVEN WIRE MESH.

2. SECOND DASH NUMBER SPECIFIES NOMINAL MICRON RATING.

1. FIRST DASH NUMBER SPECIFIES SIZE.

UNLESS OTHERWISE SPECIFIED

DIMENSIONS IN INCHES
REMOVE ALL BURRS

MACHINE RADII
.005/.015 R.

BREAK ALL SHARP EDGES
.002/.010 R.

DECIMALS .XX	DECIMALS .XXX	FRAC	ANGLES
±	±	±	±

DO NOT SCALE THIS DWG.
INTERPRET DWG PER IAW DOD-STD-1000
DIMS & TOLS. PER ANSI Y14.5

SURFACE ROUGHNESS PER ANSI B46.1
100 √

MATERIAL NOTED

FINISH

DFT BY:
DESIGN BY:
APPVD BY:

CUSTOMER NAME

CUSTOMER P/N

Genesis Filtration Inc.
9757 7th STREET, UNIT 804
Rancho Cucamonga, CA 91730

TITLE
THREAD INSERT

SIZE	FSCM NO.	DWG NO.	REV
A	04AX3	10261-1-2	

SCALE | GFORME05 12/24/98 | WEIGHT | SHEET OF