


10MHZ BPF RL ENCASED

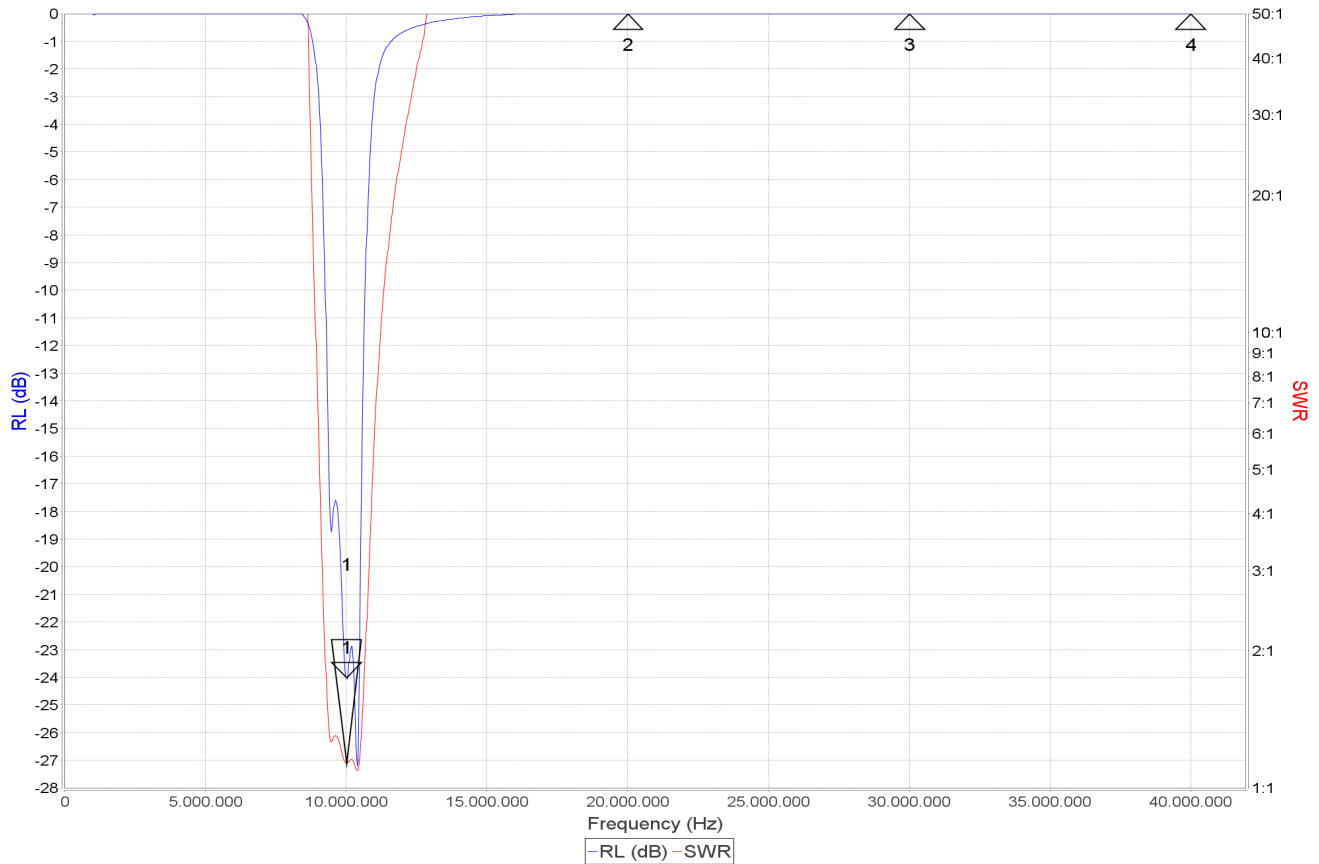

Marker	Freq. (Hz)	RL (dB)	RP (°)	Z (Ω)	Rs (Ω)	Xs (Ω)	Theta	SWR
1	10.003.720	-24,02	153,69	44,7	44,6	2,5	3,2	1,13:1
2	20.010.640	0,00	7,71	742,0	0,0	742,0	90,0	:1
1-2	10.006.920	24,02	145,98	697,4	44,6	739,5	0,0	---
3	30.017.560	0,00	1,72	3330,0	0,0	3330,0	90,0	:1
4	39.999.400	0,00	-1,43	4000,3	0,0	-4000,3	-90,0	:1

Comment:

Date: 31/5/2017 6:21
 Mode: Reflection
 Analyser: miniVNA Tiny / mini radio solutions - miniVNA Tiny
 Scan
 Start: 1000000 / 1.000.000
 Stop: 39999584 / 39.999.584
 Samples: 1556
 Overscan: 1
 Calibration
 Samples: 10000
 Overscan: 0
 File: REFL_rednew.cal
 User: makis
 Headline: 10MHZ BPF RL ENCASED

Port extension len: <not set>m

Port extension vf: <not set>