


SPECIFICATIONS:

Impedance: 50 Ohm
 Frequency: DC-40 GHz
 VSWR: 1.20:1 Max.
 Input Power: 1 Watt
 RF Leakage: 90 dB Min.
 Operating temp. : -55°C - +125°C

Part	Material	Plating
2.92mm Connector	Stainless Steel	Passivated
Center Contact	Beryllium Copper	Gold

RoHS Compliant

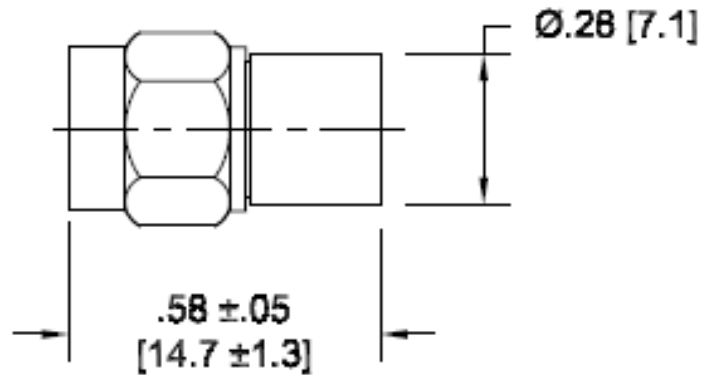

Dimensions are for reference only, and are subject to change without notice.



Premier RF
 17 Roslyn CT
 Patchogue, NY 11772
 PH: 631-447-3804
 sales@premier rf.com
 www.premier rf.com

	PART NUMBER	PRF-TE10M140-SP
04/06/2013	DESCRIPTION	2.92MM MALE TERMINATION DC-40 GHz, 1 WATT
APPROVED		
A. Ianacci		