


PRODUCT DATA SHEET

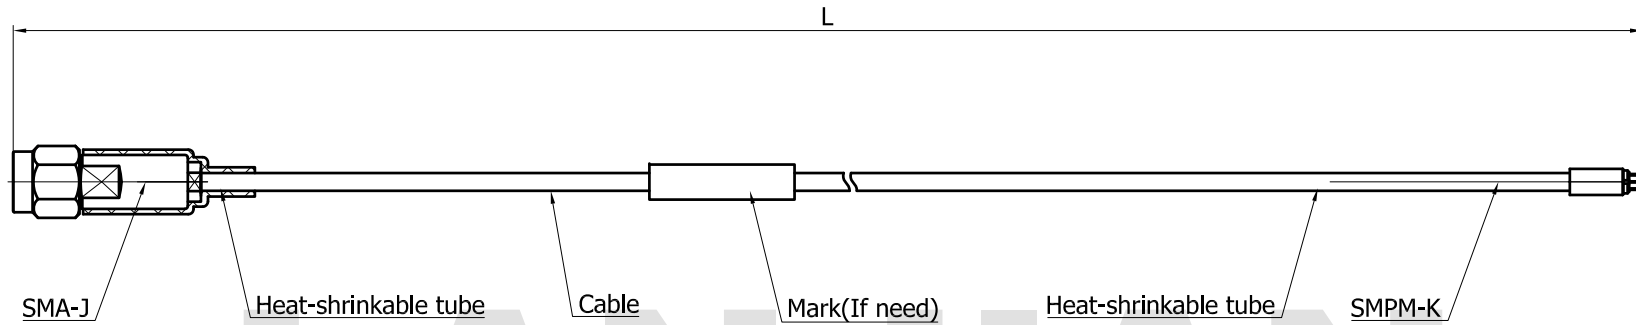

ITEM	P/N	L (mm)
1	Z090-SMAJ/SMPMK-180	180
2	Z090-SMAJ/SMPMK-250	250

MATERIAL:

BODY: STAINLESS STEEL/BERYLLIUM COPPER
 CONTACT: BERYLLIUM COPPER
 INSULATOR: PEI/PTFE

PERFORMANCE:

IMPEDANCE: 50 OHMS
 FREQUENCY: DC TO 10GHz
 ≤1.25
 两根组件间相位: ≤10ps

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM LANJIAN ELECTRONICS	MATERIAL :		
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM		
	TOLERANCES :		
	X.X	±0.20	ANGULAR : ±1°
	X.XX	±0.10	FILLETS R/C : ±0.10
	X.XXX	±0.01	SURFACE FINISH : Ra 1.6
	DEBURR AND BREAK SHARP EDGES		
		NAME	DATE
	DRAWN	X.C.W	03/23/2021
	CHK'D	H.Z.Y	03/23/2021
APP'VD	H.Z.Y	03/23/2021	
MFG			
PROJECTION		SIZE	SCALE
		A3	1:1

38 Hengtong Road, Xinqu Dingmao
 Zhenjiang, 212009, Jiangsu, P. R. China

TITLE	
Z090-SMAJ/SMPMK-L	
DWG No.	REV. A
DO NOT SCALE THE DRAWING	
PAGE 1 / 1	