



AZ ONE CUP REPAIRS- REPLACE THERMOCOUPLE PROBE

GENERALLY WHEN A THERMOCOUPLE PROBE GOES BAD THE TEMPERATURE READINGS WILL EITHER BE WAY OFF OR SCREEN WILL SHOW MANY LETTER "L" ON READOUT. IF BAD REPLACE:

1. OPEN UNIT

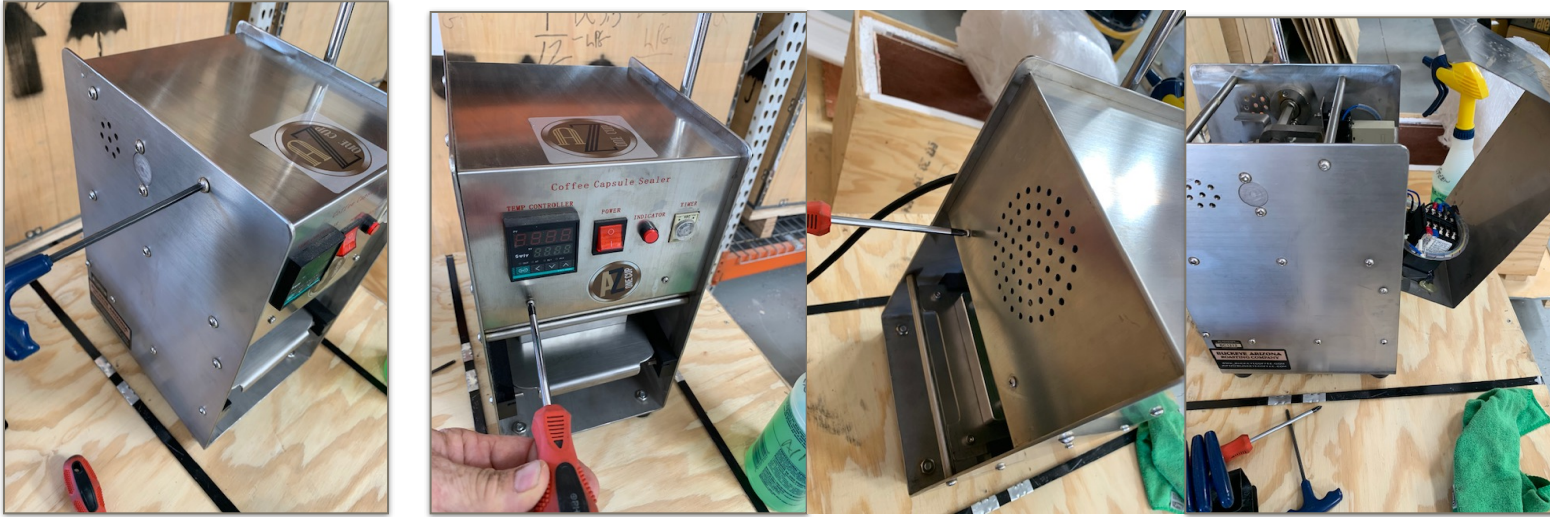

2. REMOVE THE TWO PROBE WIRES

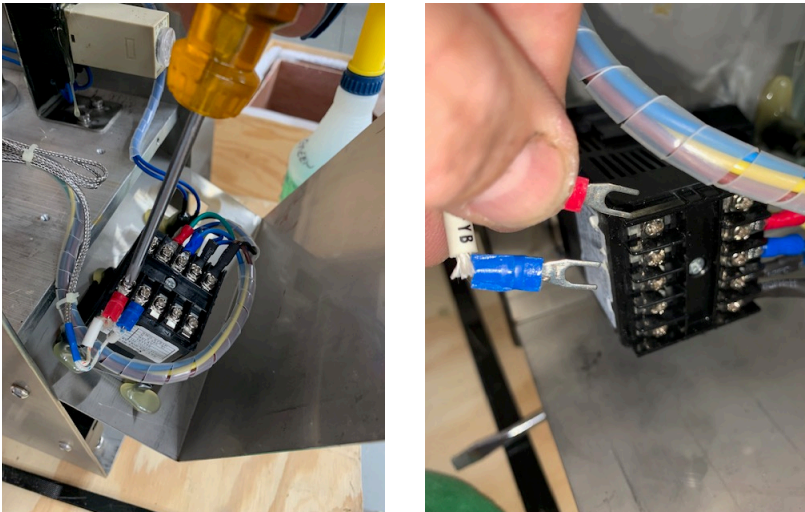

3. BEFORE INSTALLING NEW PROBE JUST HOOK IT UP TO CONTROLLER AND THEN TURN UNIT ON TO SEE IF IT READS AMBIENT TEMPERATURE. IF IT SEEMS TO WORK GO AHEAD AND TURN POWER OFF AND PROCEED TO REMOVE OLD PROBE AND REPLCE WITH NEW PROBE.

AZ ONE CUP REPAIRS- REPLACE THERMOCOUPLE PROBE

4. SNIP OFF CAREFULLY THE TIES THAT HOLD PROBE WIRES INTO UNIT



5. LOOSEN BOLT THAT HOLDS PROBE INTO HEAT PLATE & REMOVE



4. REPLACE WITH NEW PROBE AND WIRE BACK UP TO CONTROLLER. USE TIES TO CONTAIN EXCESS WIRE