




Tier 1

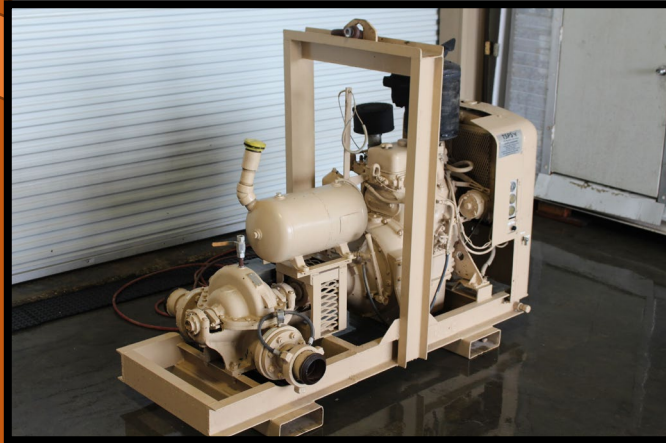

Displacement (Fill) Pump Tier 1


This style of pump is mainly used for filling a pipeline with water prior to performing the actual Hydrotest. This tier of fill pump is best used for smaller applications.



These units are intended for small bore lines and fabrication displacement purposes



(500-20,000) Gal
Effective Displacement
Range



(50-500) GPM Flow
rate



1" - 3" Discharge/
Tie-in Ports

It all starts with a
phone call.
Contact us Today.

337-935-6082