
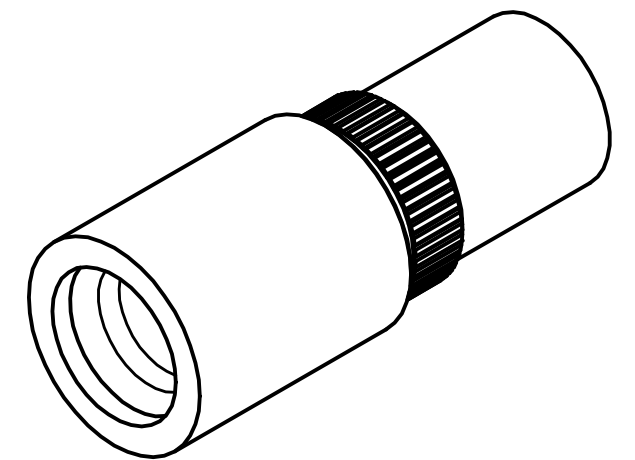


# PRODUCT DATA SHEET

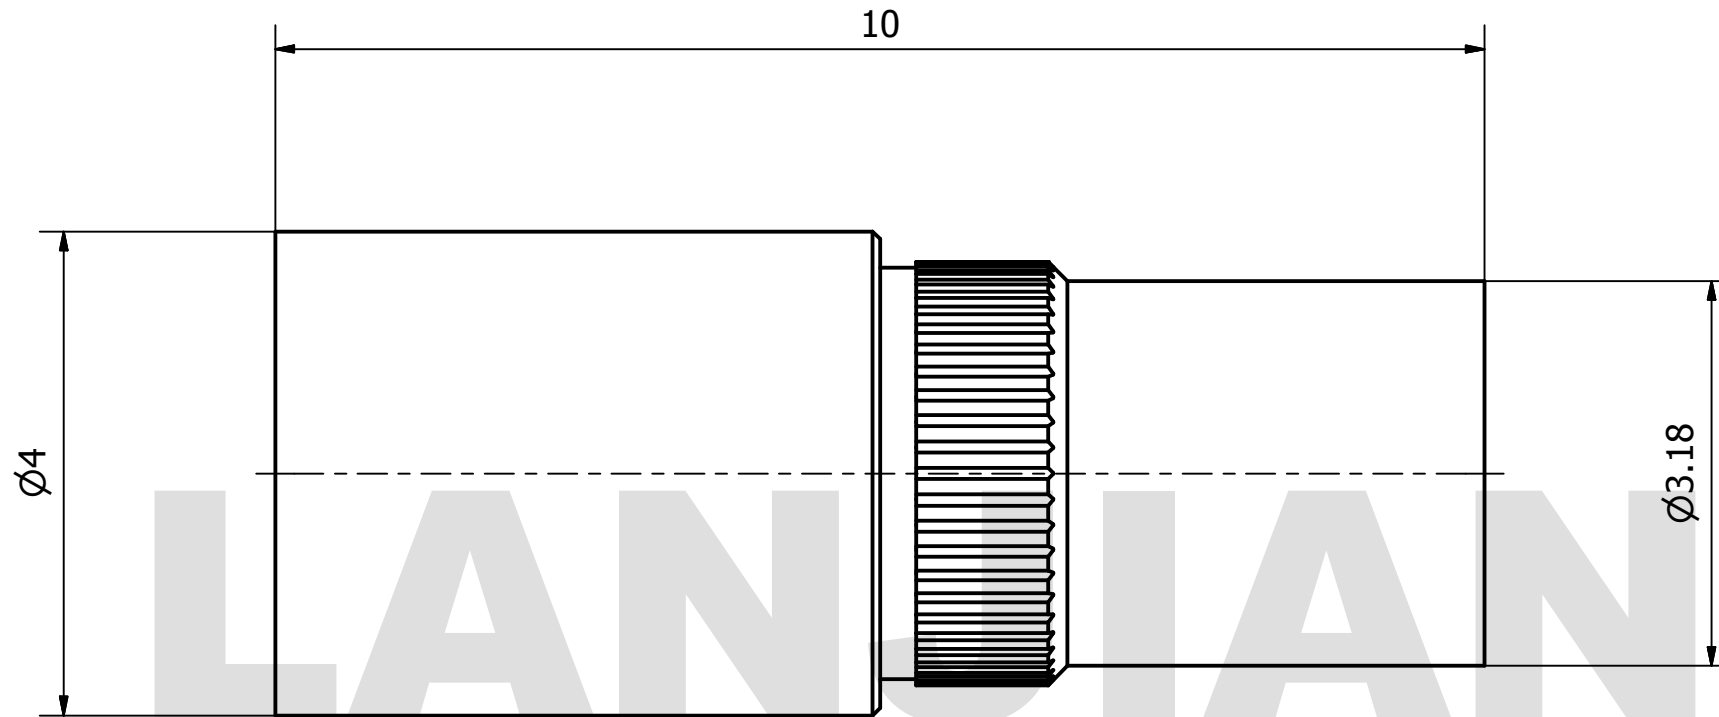

**MATERIAL:**  
 BODY: STAINLESS STEEL PER AMS-5640,  
 ALLOY UNS S30300  
 CONTACT: BERYLLIUM COPPER PER ASTM B196.  
 ALLOY NO. UNS C17300  
 INSULATOR: PEI

**PERFORMANCE:**  
 IMPEDANCE: 50 OHMS  
 FREQUENCY: DC TO 65 GHz  
 VSWR:  $\leq 1.50$

|  |  |            |                              |
|--|--|------------|------------------------------|
| THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS" | MATERIAL :                                   |            |                              |
|  | UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM |            |                              |
|  | TOLERANCES :                                 |            |                              |
|  | X.X  | $\pm 0.20$ | ANGULAR : $\pm 1^\circ$      |
|  | X.XX   | $\pm 0.10$ | FILLETS R/C : $\pm 0.10$     |
|  | X.XXX  | $\pm 0.01$ | SURFACE FINISH : Ra 1.6      |
|  |  |            | DEBURR AND BREAK SHARP EDGES |
|  |  | NAME       | DATE                         |
|  | DRAWN  |            |                              |
|  | CHK'D  |            |                              |
| APPV'D   |  |            |                              |
| MFG  |  |            |                              |
| PROJECTION   |  | SIZE       | SCALE                        |
|  |  | A3         | 16 : 1                       |

**LANJIAN ELECTRONICS**

38 Hengtong Road, Xinqu Dingmao  
Zhenjiang, 212009, Jiangsu, P. R. China

---

TITLE

SMPM-JJ straight adaptor

---

|                          |            |
|--------------------------|------------|
| DWG No. GCPZ3.640.H.003  | REV.       |
| DO NOT SCALE THE DRAWING | PAGE 1 / 1 |