



# AIR FRICTION CHART FOR TRUEFLEX ALUMINUM DUCT - TF

UNCOMPRESSED LENGTH, ROUGHNESS FACTOR= ROUGH

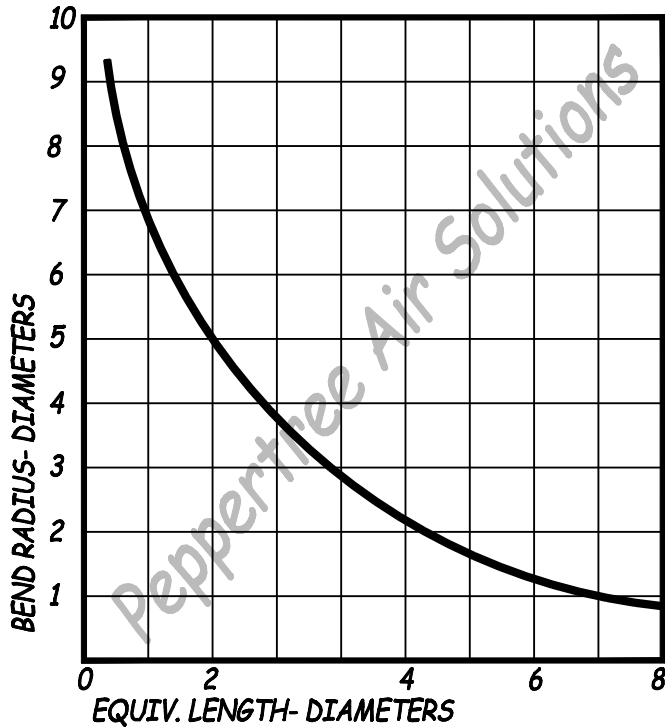

**ENGINEERING DATA**

GRAPH GIVES THE EQUIVALENT LENGTH OF DUCTING FOR ANY BEND RADIUS

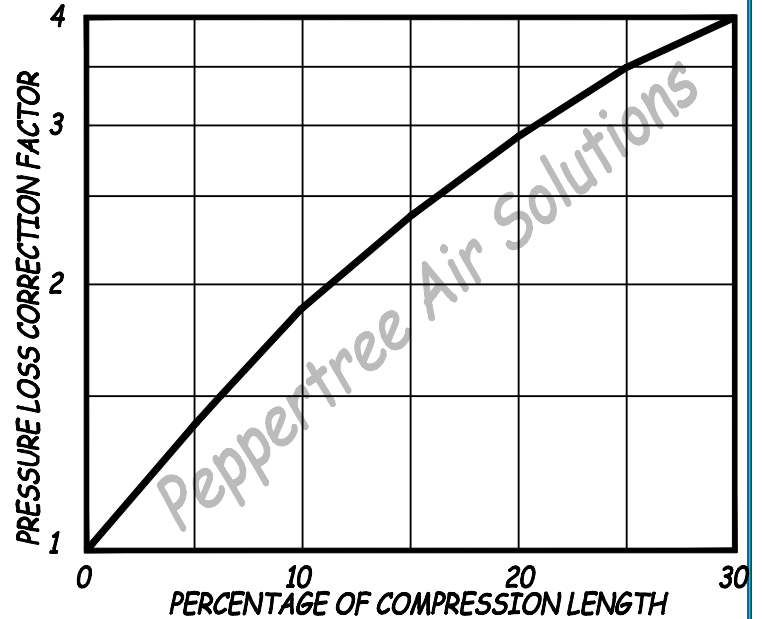

**ENGINEERING DATA**

GRAPH GIVES THE CORRECTION FACTOR FOR COMPRESSED FLEXIBLE DUCT

DIAMETER, (inches)	4	5	6	7	8	9	10	12	14	16
WEIGHT (lbs./foot)	.15	.19	.22	.28	.31	.35	.38	.44	.56	.62
BEND RADIUS, (in.)	6	7	9	10	12	13	15	18	21	24

**PEPPERTREE AIR**  
SOLUTIONS INC

AIR FRICTION CHART  
TRUEFLEX  
DUCT - TF