

# ADC Products

## TS-LD SERIES

-High Precision Light Duty Tilt Stages-

## SPECIFICATIONS

The TS-LD Series tilt stage(s) provide a rigid, accurate motion for general goniometric use. The TS-LD Series is stepper motor driven, guided with curved linear bearings, and has a rugged anodized aluminum body. The top and bottom mounting surfaces are precision ground to provide an optimal interface. The TS-LD Series uses curved crossed roller bearings for the highest possible rigidity and profiled trajectory. The drive mechanism is a precision ground worm wheel segment and stepper motor driven worm.

### MECHANICAL

Specification	TS50	TS90	TS160
Travel Range (°)	+/-10	+/-10	+/-10
Gear Reduction	360:1	360:1	360:1
Repeatability (µrad RMS)	280	280	160
Trajectory Straightness (µm/25mm)	5	5	5
Runout (µm)	3	3	15
Full Step Resolution (µrad)	26	28	27
Load Capacity (kg)	6	12	20


### ELECTRICAL

Motor	Limit Switches	Optical Encoder
2-Phase; 5-Phase Stepper; DC	Mechanical, Normally Closed	Renishaw Tonic Series

### LOAD CHARACTERISTICS


$F_x$ (kN)*	$M_x$ (Nm)
450, 1700, 2500	5

\*For eccentric maximum load, contact ADC engineering.

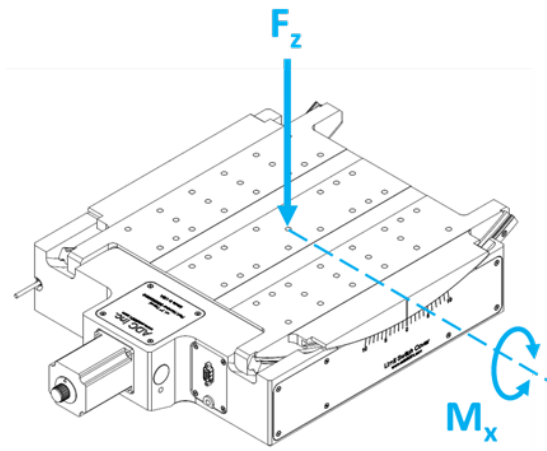


# DIMENSIONS

Top View

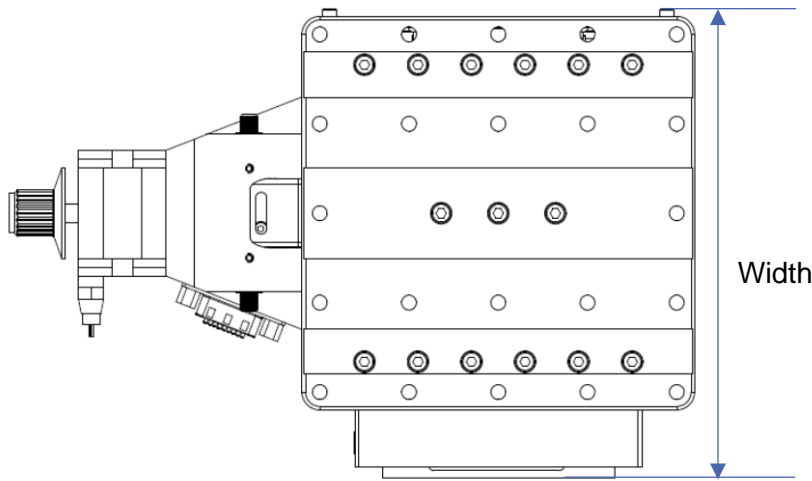

Side View

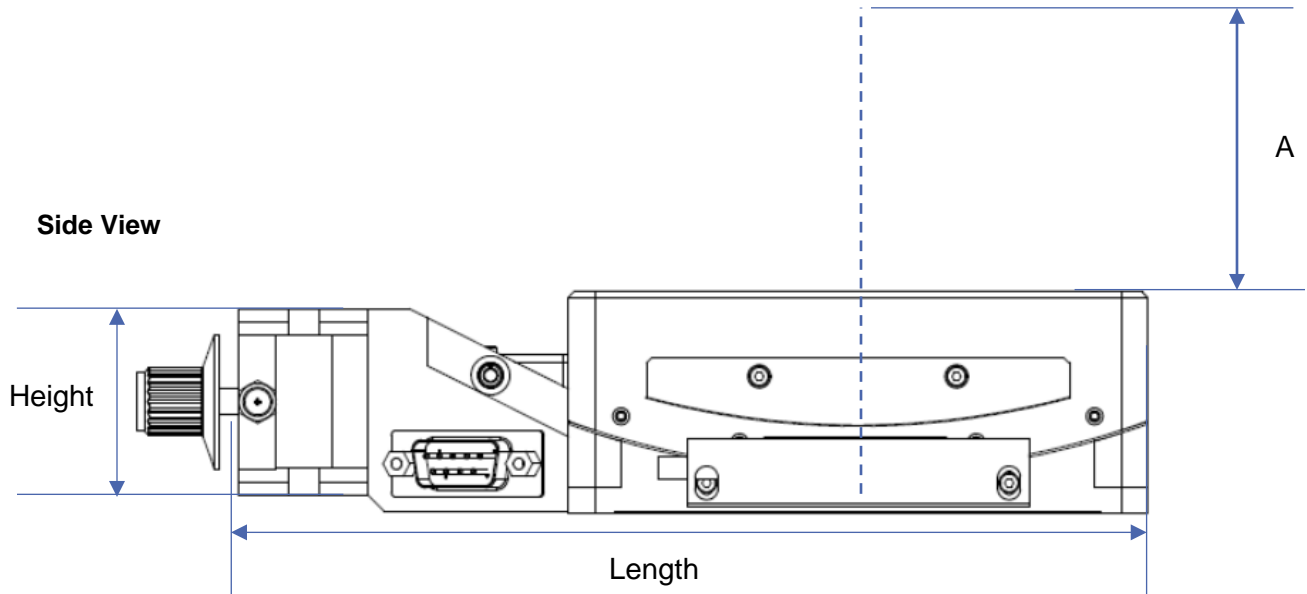

(mm)	Length	Width	Height	A	Mounting Surface	Curvature of Rails
<b>TS-50</b>	170	87	41	18	85x85	50
<b>TS-90</b>	170	106	40	59	85x85	90
<b>TS-160</b>	192	112	42	130	110x110	160

## ORDERING INFORMATION

Tilt Stages can be ordered with different configurations. Please use the codes provided below when ordering. Please call or e-mail to ask about any other customization required.

TS-HD (Heavy Duty Tilt Stage)	TS-50	TS-90	TS-160
<b>Air Preparation Options</b>	-A (Standard Air Stage) -V (Vacuum Stage; ask about options when placing order)		
<b>Encoder Options</b>	-E (With Encoder) -N (Without Encoder)		
<b>Brake Options</b>	-B (With Brake, 24VDC) -N (Without Brake)		
<b>Motor Options</b>	-2PH (Standard 2 Phase Bi-Polar Stepper Motor) -5PH (5 Phase Stepper Motor) -DC (DC Motor)		
<b>Gearbox Option</b>	-G (customer to enter desired ratio; 3:1 to 100:1 available)		

**Example Order:**

**TS90-A-E-N-2PH**

This is an order for a TS50 Precision Goniometer in air, with encoder, no brake, and a 2-phase motor, no gearbox is implied.

## OTHER ADC STAGES



Linear Stages	Lift Stages
DS210	DJ210
DS310	DJ310
DS410	DJ410
DS510	BJ10
	BJ25
Tilt Stages/ Goniometers	Rotation Stages
TS-50	RS-100
TS-90	RS-200
TS-160	RS-300
TS-300	RS-400
TS-400	RS-500
TS-565	
TS-700	

