

Undercounter Refrigerators



Model	Size
URX27	27" Unit
URX48	48" Unit
URX61	61" Unit
URX72	72" Unit

STANDARD FEATURES

- Stainless steel exterior, aluminum back. Bright white aluminum interior.
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F
- Self-Closing glass doors with locks and keys.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Option of different handles & control panels available.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency
- Pre-installed heavy-duty casters with brakes
- Removable installation board makes it easy to access condenser coil for cleaning and service
- These units use HYDRO-CARBON R290 refrigerant which is environmentally friendly and more efficient than R134a/R404a refrigerant

*Not suitable for installation in a non-commercial or residential applications.

Items	Description	Items	Description
Front, top & sides	Stainless steel	Temperature control	Solid state thermostat/Digital display
Doors	Stainless steel / ABS liner	Approvals	ETL LISTED
External back	Aluminum	Refrigerating system	Capillary tube
Cabinet interior	ABS	Refrigerant	R290A
Interior floor	Stainless steel	Temperature range	-7°F to -1°F
Insulation	Polyurethane (CFC free)	Evaporator	Powder coated aluminum/copper
Shelves	Heavy duty, PVC coating	Condensing unit	Rear mounted


CONFORMS TO NSF/ANSI STD 7

REFRIGERATION





DETAILS AND DIMENSIONS

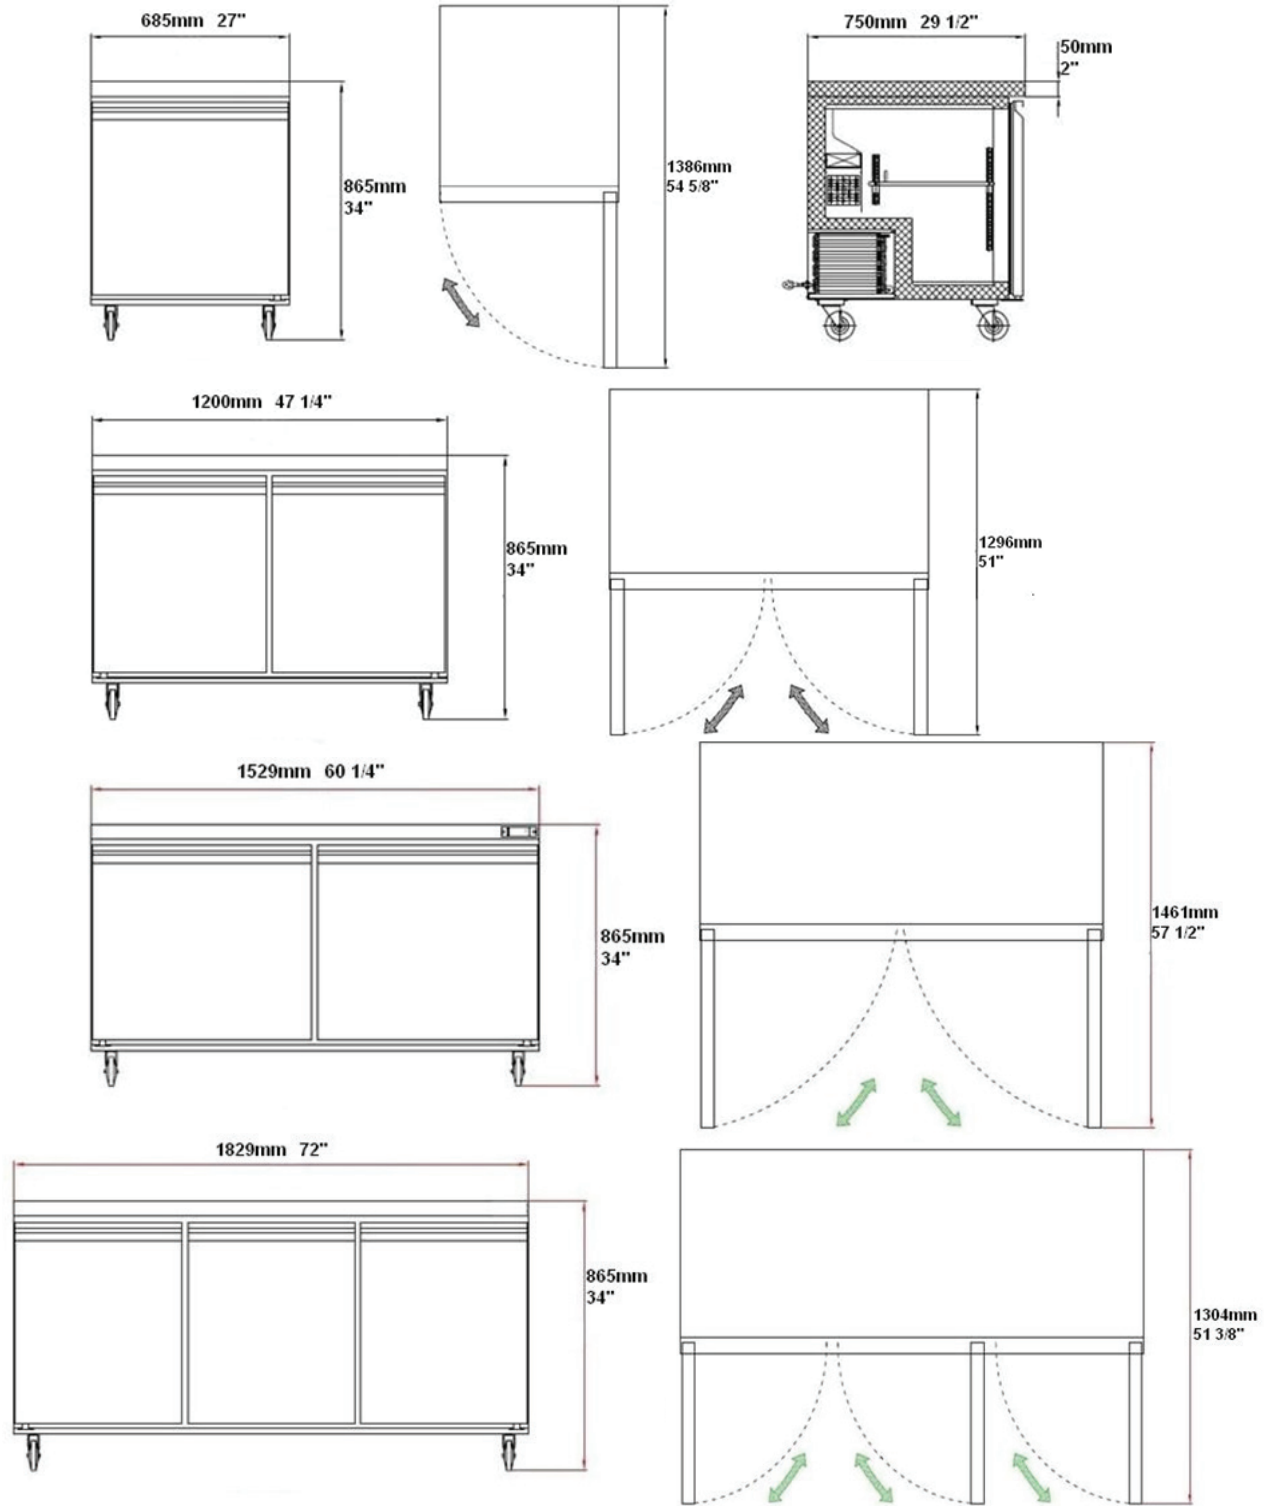

Model	Doors	Shelves	Cabinet Dim (inches)			HP	Voltage	Amps	NEMA Plug	Cord Length
			L	D	H					
URX27	1	1	27	29.5	35.2	1/6	115/60/1	1.9	5-15P	10
URX48	2	2	47.2	29.5	35.2	1/5	115/60/1	2.7	5-15P	10
URX61	2	2	60.2	29.5	35.2	1/5	115/60/1	2.9	5-15P	10
URX72	3	3	72	29.5	35.2	1/5	115/60/1	3.2	5-15P	10