


SUBMITTAL DATA SHEET

4" Pump Ends
 5 - 70 GPM Stainless Steel Pumps
G Series - 40 GPM



All G Series Stainless Steel Pump Ends come with a 2" discharge and sizes range from 1 to 10 horse power (HP).

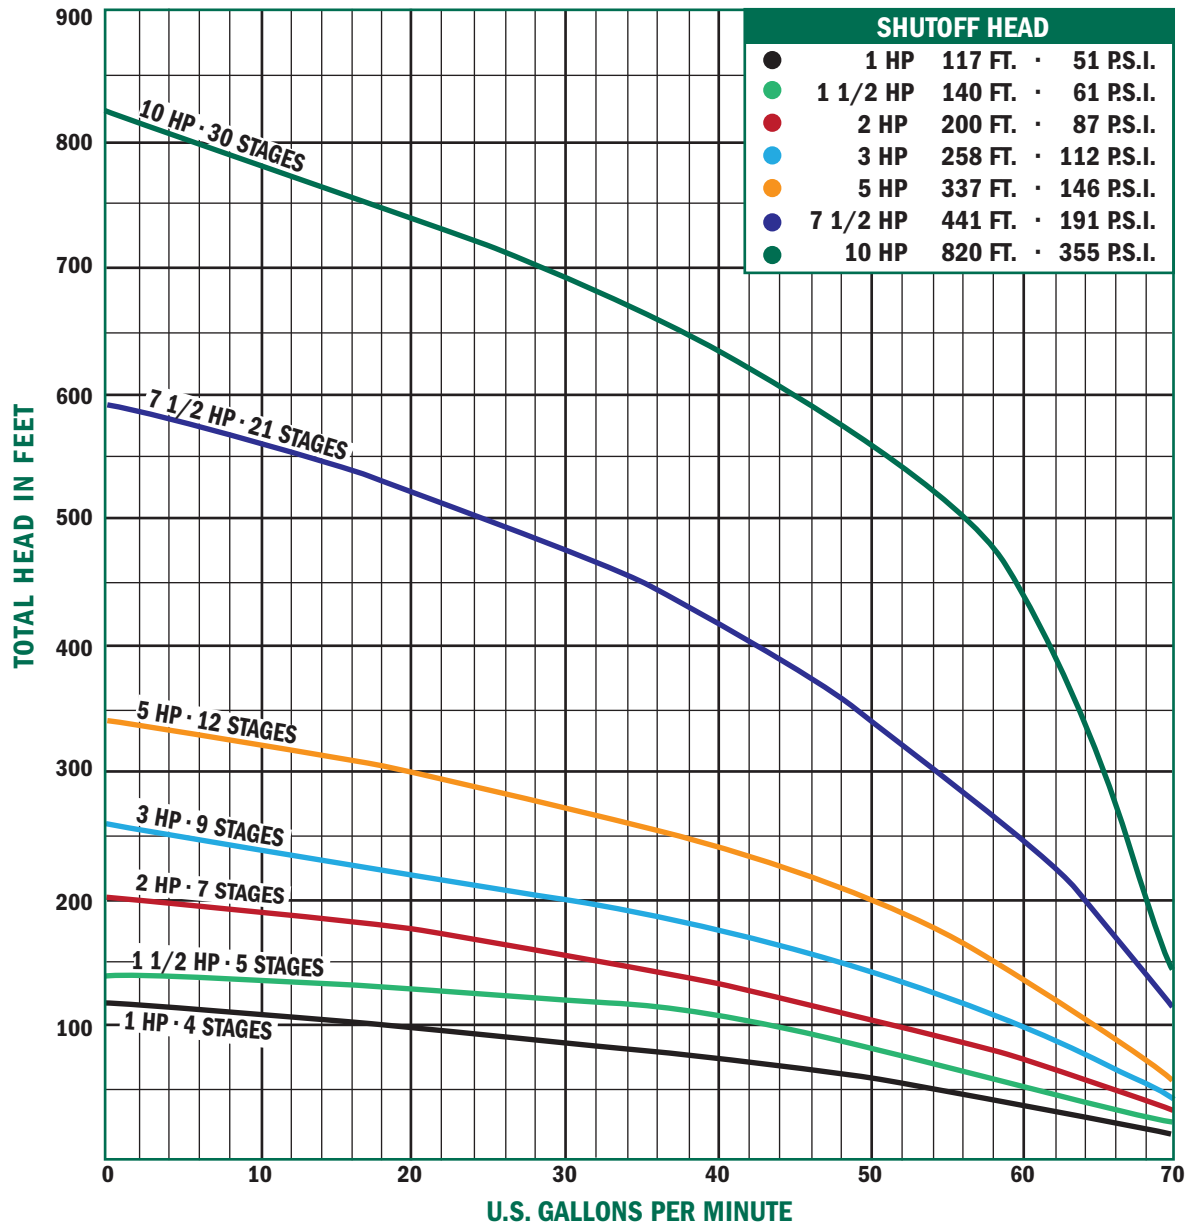

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
 P.O. Box 508
 Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737
Fax: 1-800-832-9296
Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com
www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by:

SUBMITTAL DATA SHEET

4" Pump Ends
 5 - 70 GPM Stainless Steel Pumps
G Series - 40 GPM



All G Series Stainless Steel Pump Ends come with a 2" discharge and sizes range from 1 to 10 horse power (HP).

Models Available

Model Number	HP	Stage	Disch. Size	Dimension in Inches				Weight		
				A	B	C	D	Pump	Motor	Total
26100G	1	4	2"	14.4	11.8	26.2	3.82	8.2	23	31.2
26150G	1 1/2	5	2"	16.1	13.6	29.7	3.82	9.3	26	35.3
26200G	2	7	2"	19.4	15.1	34.5	3.82	11.5	30	41.5
26300G	3	9	2"	22.7	23.5	46.2	3.82	13.7	54	67.7
26500G	5	12	2"	27.7	29.5	57.2	3.82	17	65	82
26750G	7 1/2	21	2"	42.5	29.5	72	3.82	26.7	66	92.7
261000G	10	30	2"	57.6	44	101.6	3.82	37	120	157

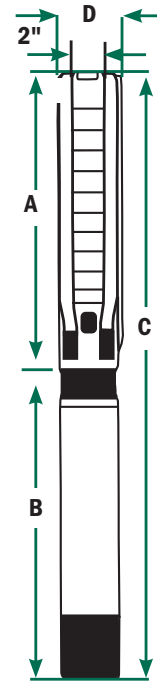


Fig. A

Output - in Gallons Per Minute (Depth to Water)

1 HP	PSI	20'	40'	60'	80'	100'	1 1/2 HP	PSI	20'	40'	60'	80'	100'	120'								
	0		64.0	54.5	42.0	18.0		0				60.1	54.0	43.2	23.4							
	30	32.0	6.0					30	50.0	35.0												
50						50																
2 HP	PSI	20'	40'	60'	80'	100'	120'	140'	160'	3 HP	PSI	20'	40'	60'	80'	100'	120'	140'	160'	180'	200'	220'
	0				61.0	56.7	51.7	43.2	29.9		0				65.6	61.5	58.1	54.8	50.2	43.2	33.2	20.8
	30	58.9	54.7	48.3	37.6	22.3					30	63.6	59.8	56.6	52.9	47.3	38.9	27.7				
50	45.5	33.2							50	55.6	51.4	45.0	35.7	23.7								
5 HP	PSI	20'	40'	60'	80'	100'	120'	140'	160'	180'	200'	220'	240'	260'	280'							
	0						63.2	60.6	58.3	55.8	52.6	48.2	42.2	34.6	25.6							
	30		64.8	62.0	59.5	57.2	54.4	50.7	45.6	38.9	30.6	21.2										
50	61.2	58.8	56.4	53.4	49.3	43.7	36.5	27.8														
7 1/2 HP	PSI	80'	100'	120'	140'	160'	180'	200'	220'	240'	260'	280'	300'	340'	380'	420'	460'	500'				
	0							64.0	62.4	61.0	59.6	58.3	56.9	53.6	48.9	42.2	33.4	22.9				
	30			64.9	63.3	61.7	60.3	59.0	57.7	56.2	54.6	52.7	50.4	44.2	36.0	25.8						
50	64.4	62.8	61.3	59.9	58.6	57.2	55.8	54.0	52.0	49.5	46.6	43.1	34.5	24.2								
10 HP	PSI	150'	200'	250'	300'	350'	400'	450'	500'	550'	600'	650'	700'	750'	800'							
	0	69.5	68.3	66.8	65.3	63.9	62.0	59.5	56.0	51	45	37.5	28	17.3	5							
	30	67.8	66.3	64.6	63.0	61.1	58.4	54.3	49.0	42	34.5	24.3	13									
50	66.4	64.8	63.2	61.3	58.9	55.1	49.8	43.2	35.6	25.8	14.4											

FRICION LOSSES IN RISER PIPE HAVE NOT BEEN CALCULATED

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
 P.O. Box 508
 Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737
 Fax: 1-800-832-9296
 Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com
 www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: