


# PRODUCT DATA SHEET

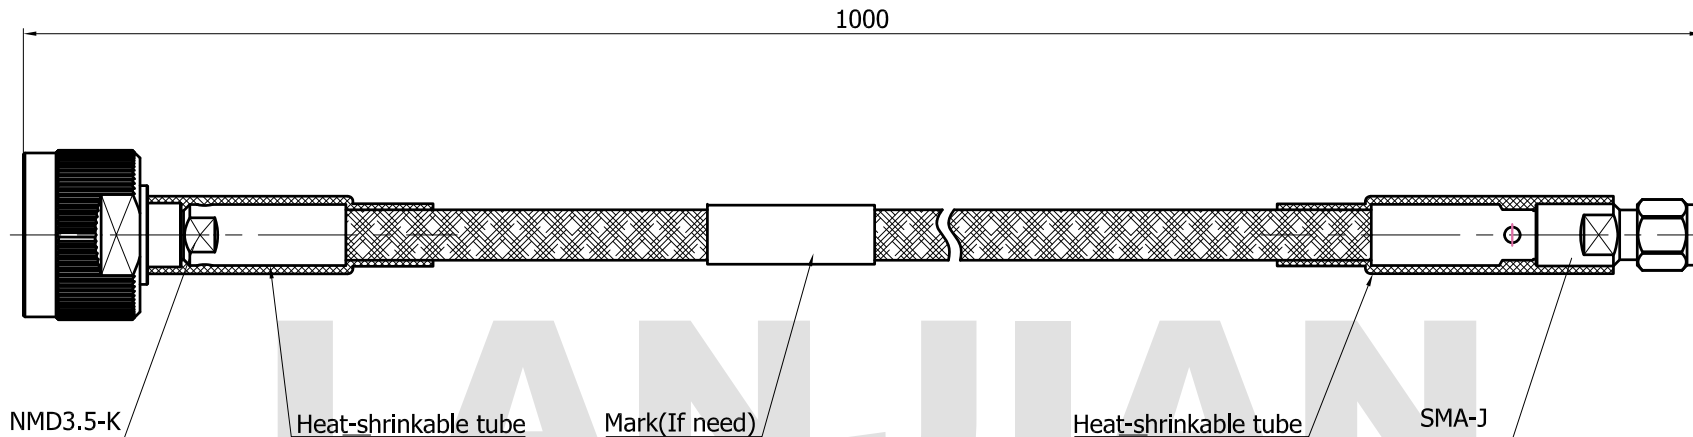

**MATERIAL:**

BODY: STAINLESS STEEL  
 CONTACT: BERYLLIUM COPPER  
 INSULATOR: PEI

**PERFORMANCE:**

IMPEDANCE: 50 OHMS  
 FREQUENCY: DC TO 26.5 GHz  
 ≤1.25

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"	MATERIAL :			<b>LANJIAN ELECTRONICS</b> 38 Hengtong Road, Xinqu Dingmao Zhenjiang, 212009, Jiangsu, P. R. China
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM			
	TOLERANCES :			
	X.X	±0.20	ANGULAR : ±1°	DEBURR AND BREAK SHARP EDGES
	X.XX	±0.10	FILLETS R/C : ±0.10	
	X.XXX	±0.01	SURFACE FINISH : Ra 1.6	
		NAME	DATE	SIGNATURE
	DRAWN	X.C.W	02/01/2023	
	CHK'D	H.Z.Y	02/01/2023	
	APPV'D	H.Z.Y	02/01/2023	
MFG				
PROJECTION		SIZE	SCALE	
		A3	1:1	
DO NOT SCALE THE DRAWING			REV. A PAGE 1 / 1	

**LANJIAN ELECTRONICS**

38 Hengtong Road, Xinqu Dingmao  
 Zhenjiang, 212009, Jiangsu, P. R. China

TITLE  
**Z3507SSPP-NMD3.5K/SMAJ-1000**

DWG No. \_\_\_\_\_ REV. A

DO NOT SCALE THE DRAWING PAGE 1 / 1