


# Sustainable Coils LLC

## Replacement Coil Solutions!

### EPA-EXA REPLACEMENT A-COILS

Revision date: 02/02/2020

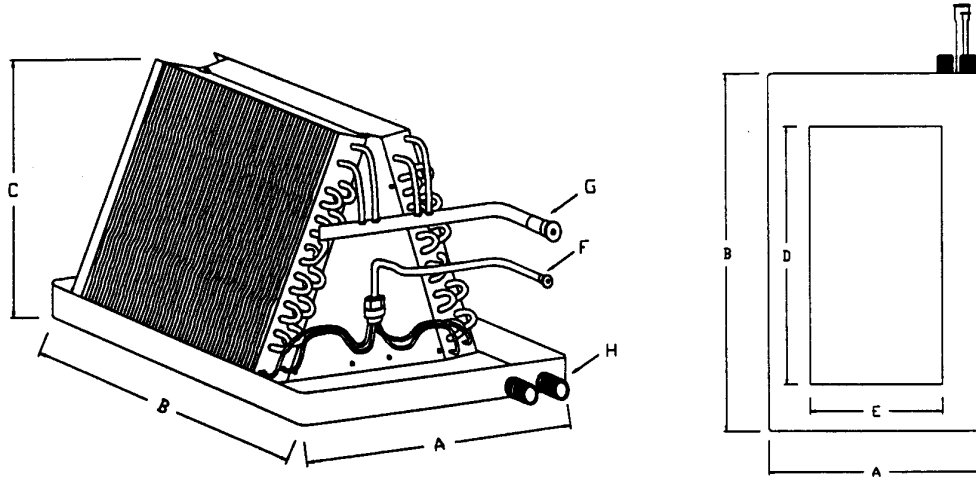

COIL MODEL	COIL WEIGHT	ROWS	A	B	C	D	E	F	G	H
**RC-EPA24B15	24	3	14 3/4	19 3/4	10 1/2	15 3/4	7 1/2	3/8	3/4	3/4
RC-EXA24B15	32	3	14 3/4	19 3/4	14 1/2	15 3/4	7 1/2	3/8	3/4	3/4
**RC-EPA36B15	30	3	14 3/4	19 3/4	12 1/2	15 3/4	7 1/2	3/8	3/4	3/4
**RC-EPA36F19	32	3	18 1/8	19 3/4	12 1/2	15 3/4	10 3/4	3/8	3/4	3/4
RC-EXA36B15	38	3	14 3/4	19 3/4	18 1/2	15 3/4	7 1/2	3/8	3/4	3/4
RC-EXA36F19	39	3	18 1/8	19 3/4	18 1/2	15 3/4	10 3/4	3/8	3/4	3/4
RC-EPA42F19	39	3	18 1/8	19 3/4	18 1/2	15 3/4	10 3/4	3/8	7/8	3/4
RC-EPA48F19	43	3	18 1/8	19 3/4	20 1/2	15 3/4	10 3/4	3/8	7/8	3/4
RC-EPA48J22	46	3	21 7/8	19 3/4	22 1/2	15 3/4	14 1/2	3/8	7/8	3/4
RC-EPA48L24	47	3	23 1/2	19 3/4	22 1/2	15 3/4	17	3/8	7/8	3/4
**RC-EXA48J22	52	4	21 7/8	19 3/4	20 1/2	15 3/4	12 3/4	3/8	7/8	3/4
**RC-EPA60J22	52	4	21 7/8	19 3/4	20 1/2	15 3/4	12 3/4	3/8	7/8	3/4
**(*)RC-EPA60N26	55	4	25 1/2	19 3/4	20 1/2	15 3/4	12 3/4	3/8	7/8	3/4
**(*)RC-EXA60N26	56	4	25 1/2	19 3/4	26 1/2	15 3/4	12 3/4	3/8	7/8	3/4

Suction line 1 5/8" ←, 10 5/8" ↑. Liquid line 1 5/8" ←, 9 3/8" ↑.

Primary drain 2 1/2" ← to center, secondary drain 1 5/8" ← to center.

UNIGUARD® by Virtus Precision Tube, 3/8" O.D. 422 copper alloy tubing  
 Aluminum end plates to protect against rust corrosion  
 22 ga. G-90 paint grip metal drain pan, coated with a rust inhibitor and painted black  
 RC-EPA piston metered for R-22 application, RC-EXA equipped with R-22 heat pump TXV  
 Pre-swaged refrigerant connections, shipped with dry nitrogen holding charge  
 Five year replacement warranty

(\*) Denotes over size coil that must be shipped on a skid to a commercial location.

\*\* Denotes physical dimension modification from original 2 row coils to 3 row coils, or 3 row coils to 4 row coils.

Corresponding model numbers may be shorter than past models, but will maintain the correct internal refrigerant volumes and dimensional characteristics of each model number.