


### JAMB JACKETS

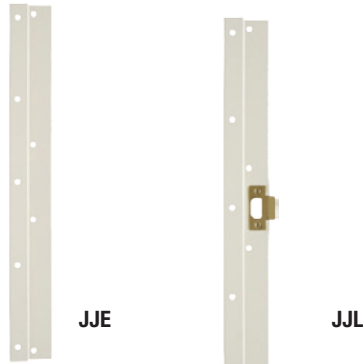

- Door jamb reinforcer repairs and covers damaged and split out door jambs damaged by a break-in without the expense of replacing the whole jamb
- Manufactured from sheet metal approximately 1/16" thick for 1-3/4" doors
- 1-3/8" available by special order
- Adds reinforcement to undamaged jambs for additional security
- Designed to cover standard 1/2" rabbeted jamb
- Finished in beige powdercoat for durability, may be repainted to match existing colour scheme
- Recessed to accommodate T-strike except JJE model

MFG #	LENGTH	EZ #
JJE 134 16	16"	060526
JJJ 134 24	24"	060525
JJJ 134 36	36"	088727

### HOLLOW METAL DOOR BRACKETS



- LMB01**
- For installing cylindrical knob locks or dead-bolts on hollow metal doors
  - Made of 12 gauge cold rolled steel
  - Supplied with adhesive template and pop rivets for convenience & accuracy
  - Center cut-out for seamed doors

- LMB02**
- As above for mortise locksets

- LMB03**
- For hollow metal or aluminum door & frames (set of 2)

MFG #	APPLICATION	EZ #
LMB01	Cylindrical Knob & Deadbolt	065840
LMB02	Standard Mortise Locks	068322
LMB03	Metal, Aluminum Door & Frames	070479

### "PIT BULL" LATCH EMBOSS TOOL



- For latch installations on 18 & 20 gauge hollow metal steel doors, this tool creates a rectangular formed pocket at the edge of the door
- A few turns with a wrench will squeeze an indentation that will accept both 1" and 1-1/8" wide by 2-1/4" high latches
- Not for seam doors

MFG #	EZ #
MDLT1	100095