


## 12K ADJUSTABLE HD CL12A

Our 12,000 lbs. capacity 2-Post lift can accommodate a wide range of standard cars, trucks, vans, and SUVs within the same service bay with +6" & +12" width adjustment and optional +1' & +2' height extensions. Standard features include 3-Stage front and rear arms.

Our CL12A-LC can be installed in shops with 12' ceilings due to a shortened column height of 11' 11."



- 13' 3" MINIMUM**
- 14' RECOMMENDED**
- 24' RECOMMENDED**
- 208-230V, 1PH, 30A**

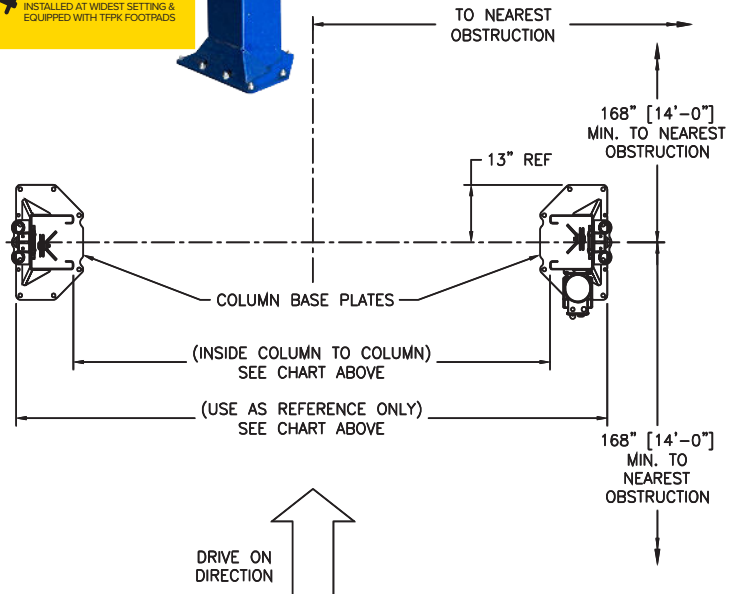

| MODEL NUMBER             | CL12A-LC  | CL12A-LC-DPC-QC           | CL12A                     | CL12A-1                | CL12A-2                | CL12A-DPC-QC              |
|--------------------------|---|---------------------------|---------------------------|------------------------|------------------------|---------------------------|
| Description              | Low-Ceiling   | Low-Ceiling w/ DPC & QC™  | Standard                  | + 1' Height Extensions | + 2' Height Extensions | Standard w/ DPC & QC™     |
| Lifting Capacity         | <b>12,000 lbs.</b>  |                           |                           |                        |                        |                           |
| Lift Configuration       | Symmetric   |                           |                           |                        |                        |                           |
| Arm Configuration        | 3-Stage Front & Rear                                      |                           |                           |                        |                        |                           |
| Rise Height              | 80¾"  |                           | 84¾"                      |                        |                        |                           |
| Overall Height           | 11' 11"   |                           | 13' 8" or 13' 2"          | 14' 8" or 14' 2"       | 15' 8" or 15' 2"       | 13' 8" or 13' 2"          |
| Overall Width            | <b>Standard - 11' 10"   +6" - 12' 4"   +12" - 12' 10"</b> |                           |                           |                        |                        |                           |
| Drive Thru Clearance     | <b>Standard - 8' 7½"   +6" - 9' 1½"   +12" - 9' 7½"</b>   |                           |                           |                        |                        |                           |
| Floor to Overhead Switch | 11' 4½"   |                           | 13' 2" or 12' 8"          | 14' 2" or 13' 8"       | 15' 2" or 14' 8"       | 13' 2" or 12' 8"          |
| Arm Reach                | <b>Min. 27½" Max. 59"</b>                                 |                           |                           |                        |                        |                           |
| Screw Pad Height         | <b>Min. 5" Max. 12½" (includes 6" stack adapter)</b>      |                           |                           |                        |                        |                           |
| Standard Motor/Voltage   | 2HP, 208v-230v, 60Hz, 1Ph                                 | 3HP, 208v-230v, 60Hz, 1Ph | 2HP, 208v-230v, 60Hz, 1Ph |                        |                        | 3HP, 208v-230v, 60Hz, 1Ph |
| Rise Time                | 60s   | <b>38s</b>                |                           | 63s                    |                        | <b>40s</b>                |
| Min. Ceiling Height      | 12'   |                           | 13' 9" or 13' 3"          | 14' 9" or 14' 3"       | 15' 9" or 15' 3"       | 13' 9" or 13' 3"          |

