

SHIELD FALL PROTECTION

SAFETOWER MOBILE SCAFFOLD SYSTEM



Shield Fall Protection

Be Safe. Shield Yourself

A safe scaffold is vital for anyone working at height.

The SafeTower scaffolding is ideal for working at height safely and comfortably.

This is the Mobile version of the Safescaffold. The new scaffolding is suitable for interior and exterior use and is made of a very high-quality Aluminium, providing the frame with a high level of rigidity. The SafeScaffold is available in various lengths.



XSPlatforms®

ventas@shieldfallprotection.com sales@shieldfallprotection.com

www.shieldfallprotection.com

SHIELD FALL PROTECTION

SAFETOWER MOBILE SCAFFOLD SYSTEM



Shield Fall Protection

Be Safe. Shield Yourself

The SafeTower is provided with the safety frame. The safety frame enables safe assembly of the scaffold in advance.

This allows XSPlatforms to ensure a safer construction than what is standard in conventional scaffolding. In addition, the SafeTower has fewer individual components per configuration, unlike conventional scaffolding, which shortens the working time.

Quixsafe Feature allows the Safetower to be erected from the inside.



SHIELD FALL PROTECTION

SAFETOWER MOBILE SCAFFOLD SYSTEM



Shield Fall Protection
Be Safe. Shield Yourself

The Safetower Mobile scaffolding has been tested and certified by TÜV Netherlands and complies with the design requirements of various international standards:

Europe:

EN 1004:2005.

North America:

OSHA 1910.29 Subsection D – Manually assembled mobile ladders and scaffolds (towers) (United States).

ANSI A10.8-2011 – Safety requirements for scaffolding systems (United States).

CSA Z797-09 – Code of conduct for the use of scaffolding systems (Canada).

SHIELD FALL PROTECTION

SAFETOWER MOBILE SCAFFOLD SYSTEM



Shield Fall Protection
Be Safe. Shield Yourself

SafeTower

Longitud de la plataforma 2,50 m o 3,05 m

Anchura de la plataforma 61 cm


Anchura del andamio 1,35 m

Altura de trabajo máxima 24 m

Carga máxima de la plataforma 203,9 kg

Carga máxima de la SafeTower 675 kg

Diámetro de tubo 50,8 mm

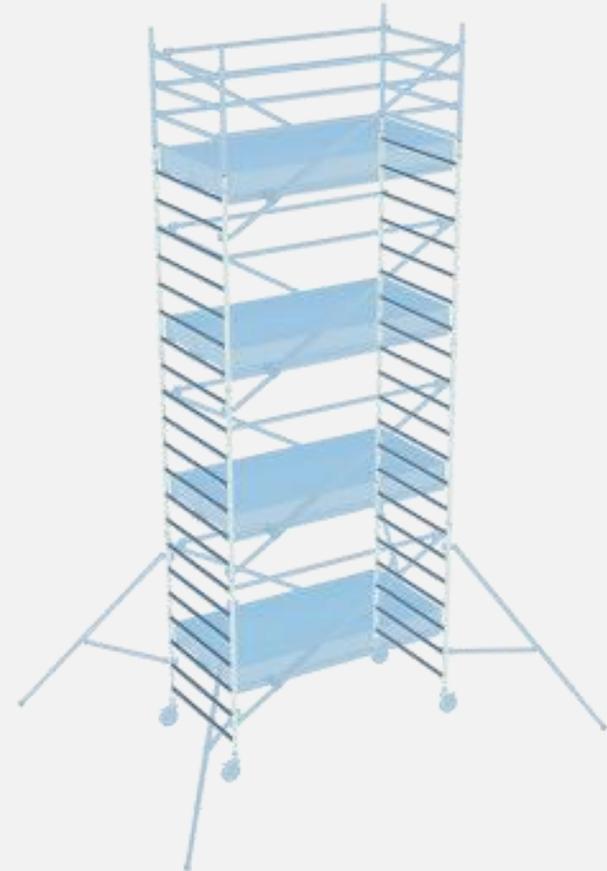

SHIELD FALL PROTECTION

SAFETOWER MOBILE SCAFFOLD SYSTEM



Shield Fall Protection

Be Safe. Shield Yourself



XSPlatforms[®]
Access to Innovation



XSPlatforms[®]
Access to Innovation



XSPlatforms[®]
Access to Innovation

XSPlatforms[®]

ventas@shieldfallprotection.com sales@shieldfallprotection.com
www.shieldfallprotection.com