

AUTOMOTIVE BATTERIES



PRODUCT FEATURES & BENEFITS

1. Container (Reinforced PP Case, Heat Sealed)

Maximized mechanical strength by using heat-resisting, acid-resisting PP resin.

2. Cover (Secondary PP Cover)

Prevent outflow of acid by twofold design with labyrinth of exchanging of water structure. (Maintenance free)

3. Spark Proof Filter (Flame Arrestor)

Prevent spark by Outside Ignition, installing flame arrestor in the inside cover.

4. Indicator

Indicate battery's state of charge automatically.

5. Proprietary Suit Case Style Handle

Convenient suit case style handle simplifies handling and improves appearance.

6. Bushing (Cold-Forged Terminal Bushing)

High strength cold forged bushings improve durability while preventing acid seepage, which cause corrosion and depolarization of the terminal.

7. More Electrolyte

Maximizing the electrolyte space above the plates improves battery life in the harshest conditions. Up to more than 1 inch more than the competition ensures maximum performance and superior life.

8. Internal Pole Strap

Maximize structure design for high rate discharge.

9. Automatic controlled cast on strap

Formation by automatic controlled cast on strap helps maintained high quality product.

10. Rolled Expanded Grid

Wrought, high tin, grids offer superior corrosion resistance maximizing life and reducing self discharge.

11. Plates (Hard Paste Plates)

Maximized Life Cycle Capacity and starting ability by using high density active material and special additives.

12. Diamond Mesh


Diamond shape of Grid improves plate conductivity.


13. Proprietary Tissue for Positive Plates

Maximized the life cycle by using special tissue and this special tissue prevent falling off the active material while charging and discha

14. Hot Melt Bonded Elements

Adhesive bonded elements improves vibration resistance and eliminates shorts caused by grid growth.

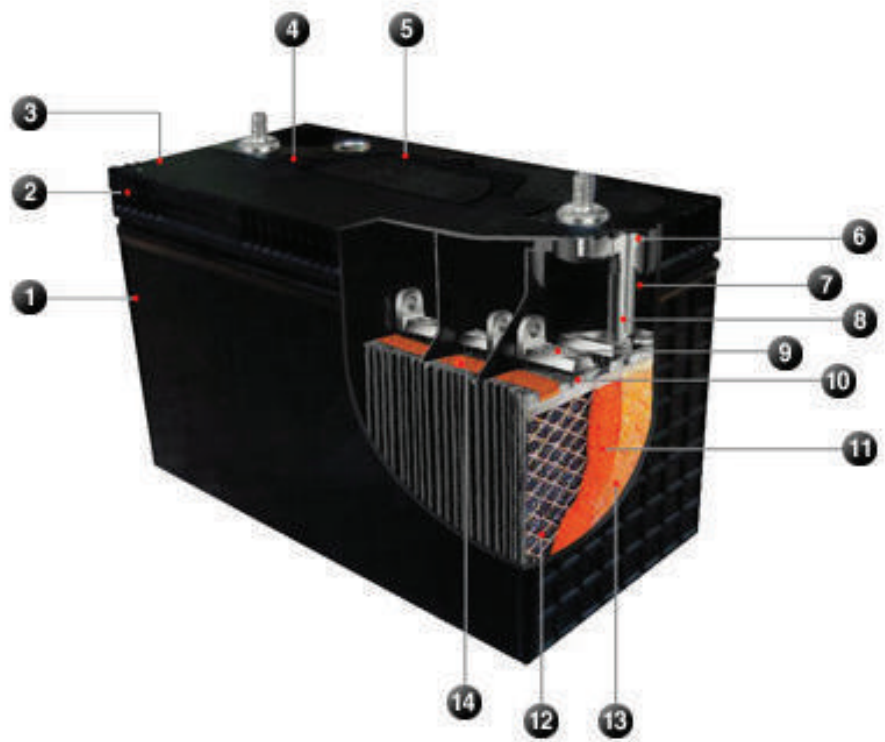

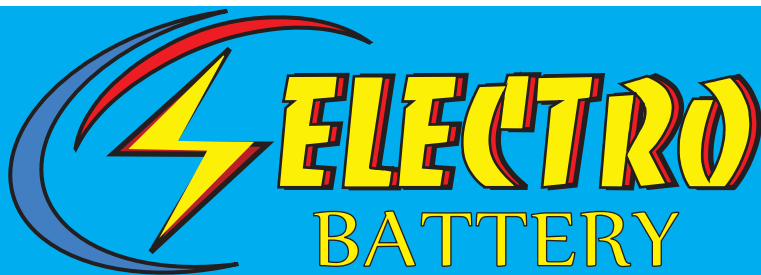


AUTOMOTIVE BATTERIES

MODEL	PERFORMANCE			DIMENSIONS			TOTAL WEIGHT (LBS)
	CCA	CA	RC	LENGTH	WIDTH	HEIGHT	
24	600	720	130	10.24	6.85	8.74	37
24F	600	720	130	10.24	6.85	8.74	37
25	550	675	90	9.13	6.81	8.86	32
26	520	620	78	8.19	6.73	8.07	27
26R	520	620	78	8.19	6.73	8.07	27
27	730	875	160	11.97	6.81	8.86	44
27F	730	875	160	11.97	6.81	8.86	45
34HD	610	730	94	10.24	6.73	8.07	33
34R	710	850	110	10.24	6.73	8.07	35
35	560	670	110	9.13	6.81	8.86	32
36R	650	800	120	10.40	7.30	8.10	39
40R	650	800	125	10.90	6.90	6.90	35
47	550	660	100	9.65	6.89	7.48	32
48	640	765	120	11.02	6.89	7.48	36
48-AGM	760	875	120	11.02	6.89	7.48	45.5
49/93	820	980	160	13.90	6.89	6.89	44
49-AGM	850	975	170	13.90	6.89	6.89	58.5
51	430	510	75	9.37	5.28	8.86	26
51R	430	510	75	9.37	5.28	8.86	26
58	530	635	86	9.37	7.20	7.20	28
59	590	725	100	10.10	7.60	7.80	37
65	675	810	130	12.01	7.48	7.48	39
65HD	800	965	145	12.01	7.48	7.48	46
70DT	420	500	60	8.19	7.05	8.07	26
75	610	730	94	9.09	7.05	7.28	31
75DT	520	620	78	9.09	7.05	8.07	29
78	610	730	94	10.24	7.05	7.28	33
78DT5	560	670	86	10.24	7.05	8.07	34
78DT	800	1000	135	10.24	7.05	8.07	37
79	840	1035	140	12.10	7.10	7.40	43
86	550	660	86	9.09	6.85	8.07	30
90	510	610	95	9.65	6.89	6.89	29
91	580	690	110	11.02	6.89	6.89	34
94R	780	935	160	12.40	6.89	7.00	43
94R-AGM	800	920	140	12.40	6.89	7.00	51.5
96R	570	685	100	9.60	6.20	6.90	32
124R	600	720	130	10.24	6.85	8.74	37
151R	340	425	57	7.44	4.94	7.87	22
NS40Z	310	370	45	7.36	5.00	9.00	19
NS40ZL	310	370	45	7.36	5.00	9.00	19
NS60	410	490	75	9.37	5.28	9.00	26

Specifications subject to change without notice. See battery label for exact specifications.

If the battery you need is not listed, please contact us.

This is a listing of the most popular automotive batteries.

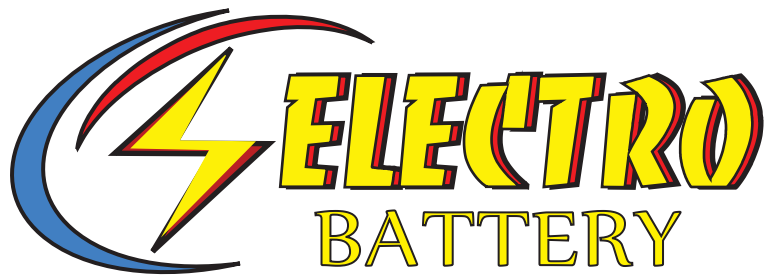

The Power that Drives Performance!