


S4S GUARDIAN® - POINT SA

Chlorine (CL2) Gas Sensor 0-5 ppm

Safe Area Sensor / Junction Box Assembly

Sensor Features:

- 0-5ppm CL2 (other ranges available)
- Can be used with all S4S Guardian® range of control panels or Customer preferred monitoring system
- Flexible output options
- Addressable 4~20mA or Standalone
- Automatic diagnostic system surveillance and fault monitoring
- Optional data logging
- Optional alarm relays / back-lit status display
- Optional internal sample pump (50 metres)
- Robust and weatherproof

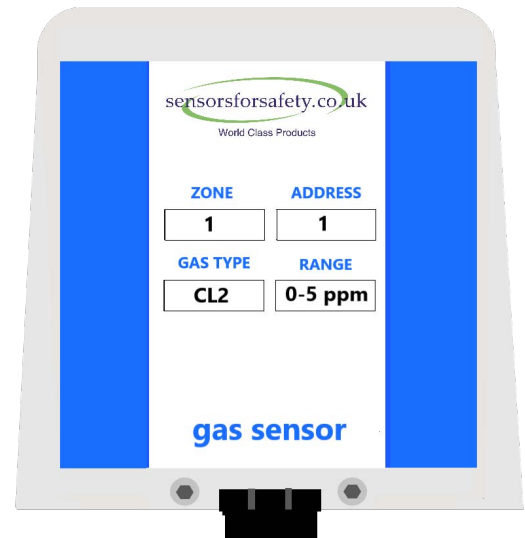

The enclosure has been designed to allow quick and easy access to its interior by adjustment of two allen screws, this factor is a major consideration when large system service and calibrations are being carried out.

The detector is robust and weatherproof with improved response times due to the four mounting spacers allowing increased air movement around the detector. These spacers also improve the mounting of the unit particularly on circular pillars. Standard 4~20ma signalling with CANbus address enables the sensors to be networked via the S4S Guardian® *Plus* or *Lite* control systems or customer preferred monitoring system.

S4S GUARDIAN® - POINT SA

Power Supply

15 to 30VDC - 24VDC nominal

Outputs

3 wire - 4~20mA

4 wire - Canbus (S4S Guardian)

Relays (optional)

Low alarm S.P.C.O

High alarm S.P.C.O

Fault alarm S.P.C.O / over-range Rating 0.5A

@30vDC

Inhibit option during servicing

Display (optional)

2 line alpha numeric backlit status display – gas type, concentration units, alarm levels, alarm status – low/high/overrange/inhibit/sensor ID

Logging

Addressable sensors only Intervals - variable time roll over/stop

Storage - 2,880 readings

Temperature

-15°C to 55°C

Humidity

0° to 99% RH - non condensing

JUNCTION BOX

Type - 30J safe area use only

Deep box (d) Shallow box (s)

Length 145mm Width 145mm

Depth 100mm (d) 65mm (s)

Ingress Protection

IP64

Material

ABS Flame Retardant FR40

Lid screws M4SS

Finish

Signal White raL 9003

Weight

380gms

Entries

Rear 5-20mm knock outs
sides, top, bottom - not specified

Mounting

Standoffs - M4 or no 8 screws

drill at (C) when standoffs removed

Conduit box - drill at (a) 4.5mm

Surface mount box - drill at (b) 4.5mm

EU Design No.

01359723-0001

DETECTOR HEAD

Type – P1 safe area use

Ingress Protection

IP63, + Universal fitting IP65

Material

ABS - Black

Sensor Insert - 4 series

Electrochemical Cell

Range

0-5ppm Chlorine (CL2) - Other ranges available

Accessories - Optional

Collector Cone + Universal Fitting

Universal Fitting (test gas applicator/spray deflector)

Flow Block

Duct Mount Kit

Detector Head Weather Shield

NOTE: This datasheet is non-contractual

www.sensorsforsafety.co.uk

E: sales@sensorsforsafety.co.uk T: 01423 206360 F: 01423 206370

Sensors for Safety Ltd | Knaresborough Tech Park | Manse Lane | Knaresborough | N.Yorks | HG5 8LF | UK