



Bobcat®


Mower Attachment



One Tough Animal™

Specifications

Mower	72 in.	90 in.
Cutting Width	71.5 in.	89.5 in.
A. Overall Width	76 in.	94 in.
B. Overall Length	68 in.	75 in.
Operating Weight	880 lb.	990 lb.
Flow Range	15-24 gpm	15-24 gpm
Number of Blades	3	3
Shutoff Travel Height	8.5 in.	8.5 in.
Cutting Height Range (Adjustable in 1/2" increments)	2-5.5 in.	2-5.5 in.
Blade Tip Speed	12,752 ft./min. @ 17 gpm 15,002 ft./min. @ 20 gpm 17,252 ft./min. @ 23 gpm	12,497 ft./min. @ 17 gpm 14,702 ft./min. @ 20 gpm 16,907 ft./min. @ 23 gpm

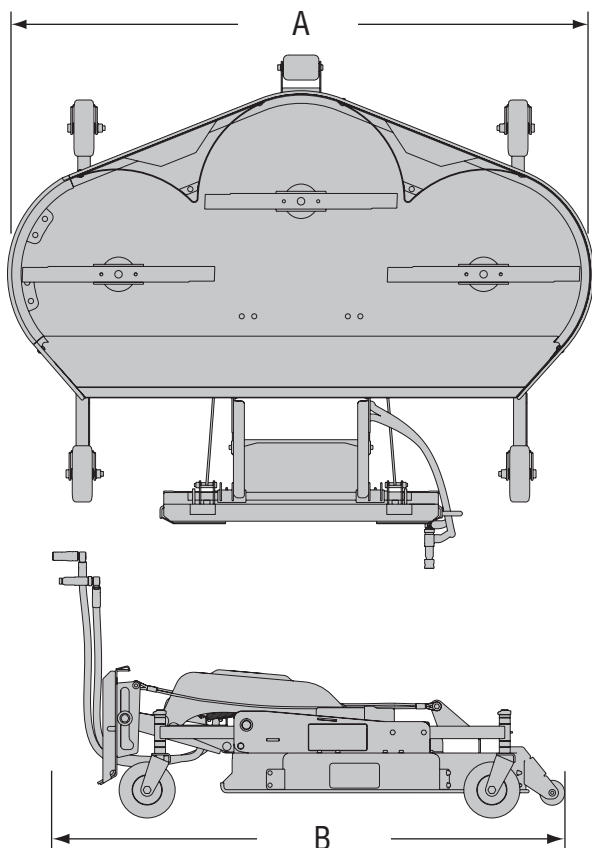

Mow it down – even in the roughest applications!

The Bobcat mower attachment is recommended for rough-cut applications, including road ditch right-of-way, golf course roughs and large acreage mowing. It's ideal for:

- Landscape contractors
- Nurseries
- Golf courses
- Municipalities
- Hobby farmers
- Large-lot and rural homeowners

Unlike 3-point hitch and belly mowers, the Bobcat mower attachment eliminates driving over the grass before cutting, and provides excellent visibility to the work area. Other features include:

- Three overlapping blades for clean cutting with no skips.
- Direct-drive hydraulic motor powers a single V-belt.
- Industry standard cutting blades elevate grass for better mulching capability with optional mulching kit.
- Adjustable cutting height from 2 to 5.5 inches in half-inch increments.
- Unique attachment frame allows mower to oscillate independently of loader.
- Rear discharge disperses grass clippings under the carrier, away from buildings, trees and fences.
- Patented blade shutoff device stops blade rotation when mower is raised off the ground.
- Anti-scalping wheel allows operator to traverse uneven terrain without scalping the surface (standard equipment on 90-inch model).
- Mulching and side-discharge kits available to easily convert the mower to fit the application.

NOTE - Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. Pictures of Bobcat units may show other than standard equipment. All dimensions are given for loader equipped with standard tires. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Bobcat Company complies with the requirements of ISO 9001 as registered with BSI.

The Bobcat Attachments Advantage: Bobcat attachments are engineered and manufactured to fit Bobcat loaders for optimum job performance, dependability and durability.

Bobcat Mower Attachment fits these carrier models:

Skid-Steer Loaders:

S100
S130
S150
S160
S175
S185
S205
S220
S250
S300
S330
S630
S650

Compact Track Loaders:

T110
T140
T180
T190
T630
T650

All-Wheel Steer Loaders:
A300

Utility Work Machine:
5600T
5610



Visit bobcat.com/anyjob for more information



Bobcat®

Bobcat Company • P.O. Box 6000 • West Fargo, ND 58078

Check out similar attachments:
Brushcat™
Rotary Cutter
Flail Cutter