


POWER SUPPLIES

S



BPS12 1

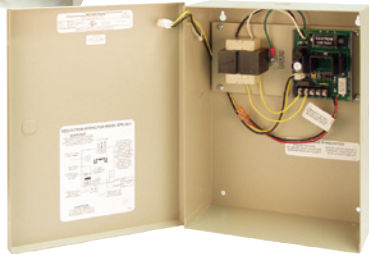

BP24 1



B12 5



PSP24

BPS12/BPS24

- Filtered and regulated DC power supply
- Battery charging circuit operates while providing DC output (battery not included)
- 1 fused output
- All UL components
- LED power indicator
- Fire alarm interface
- Cabinet size: 12" x 9" x 4"

B12 5

- 12 volt 5 amp hour battery

PSP24

- 350mA 24DC plug-in power supply

MFG #	DESCRIPTION	EZ #
B12 5	5AH 12V Battery	027587
BPS12 1	1 Amp 12V Power Supply	013333
BPS24 1	1 Amp 24V Power Supply	013334
PSP24	24DC Plug-In Power Supply	028252

KEYPAD



DK26SS

- Weather & vandal resistant unit is cast stainless steel with 11 EPDM rubber keys
- Fits narrow stile mullion
- Digital keypad system circuit board mounts in a metal enclosure provides for 59 multiple users, expandable to 119
- 5 amp DPDT relay output for lock control and alarm shunt, or other device interface, has REX input
- 16' 12 conductor, 22 gauge keypad cable
- 3 LEDs and bell button
- Current draw: 7mA@ rest, 160mA active, 12VAC or VDC 20mA@ rest, 190mA active, 24VAC or VDC
- Operating temperature: CPU 0°C to +70°C, keypad -30°C to +70°C

MFG #	DESCRIPTION	EZ #
DK26SS	Keypad	060615