
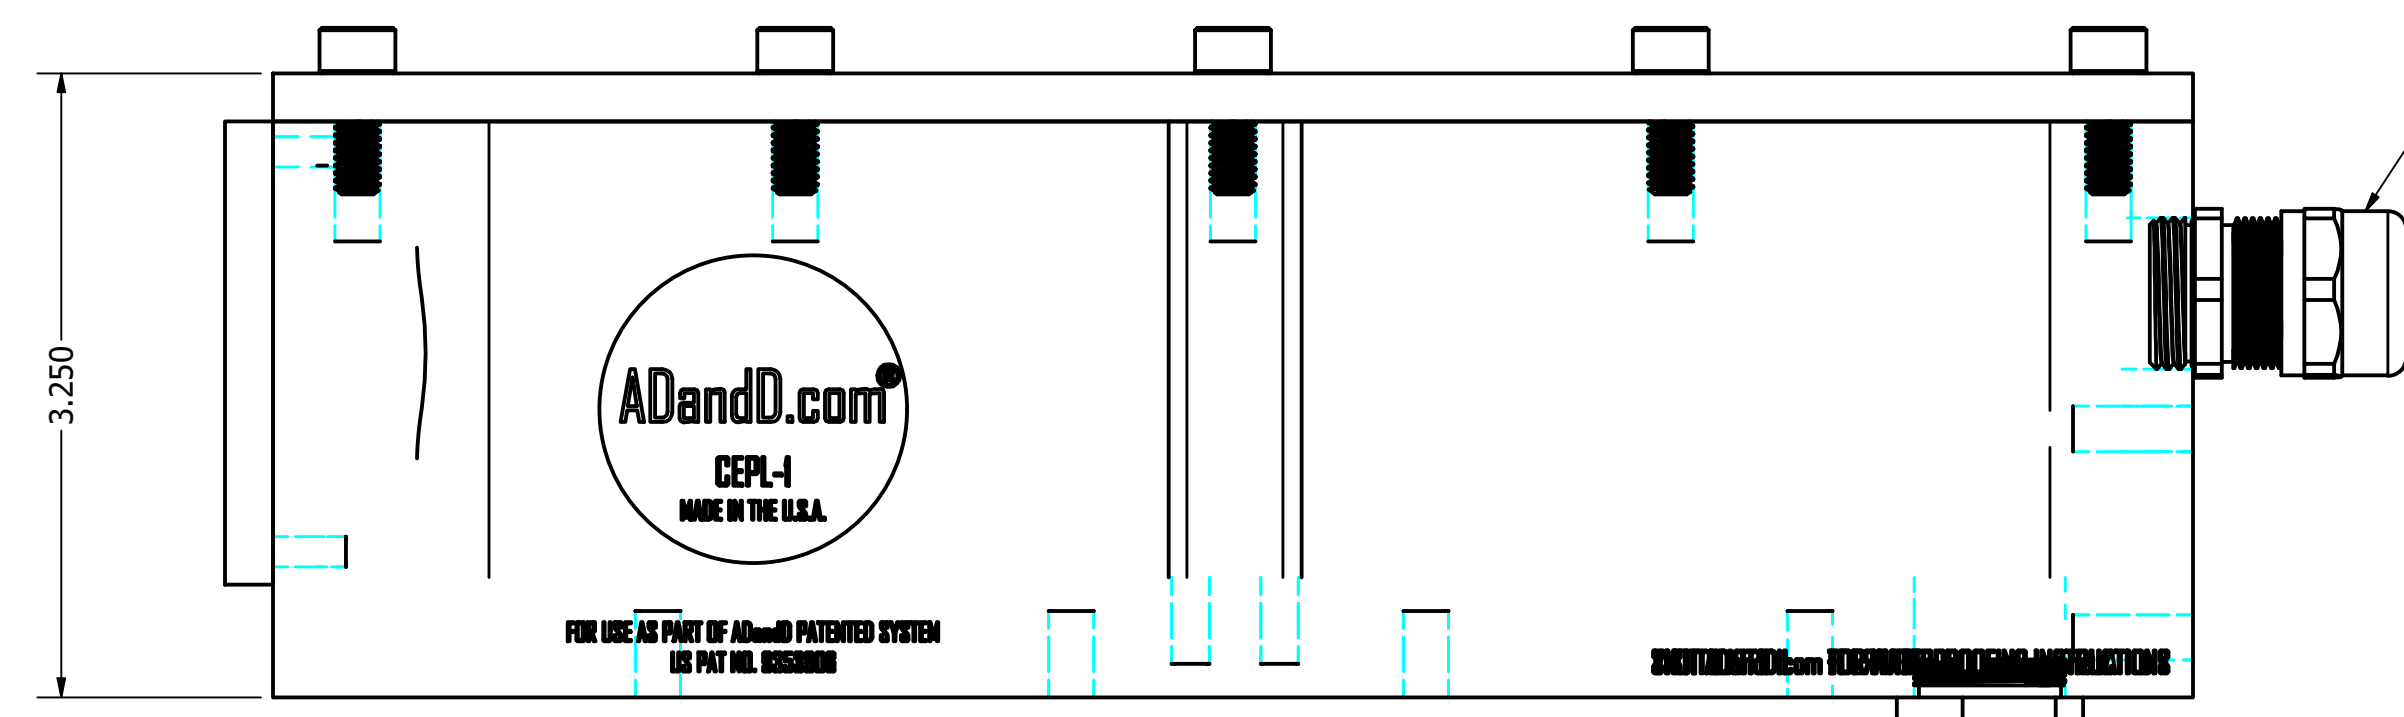
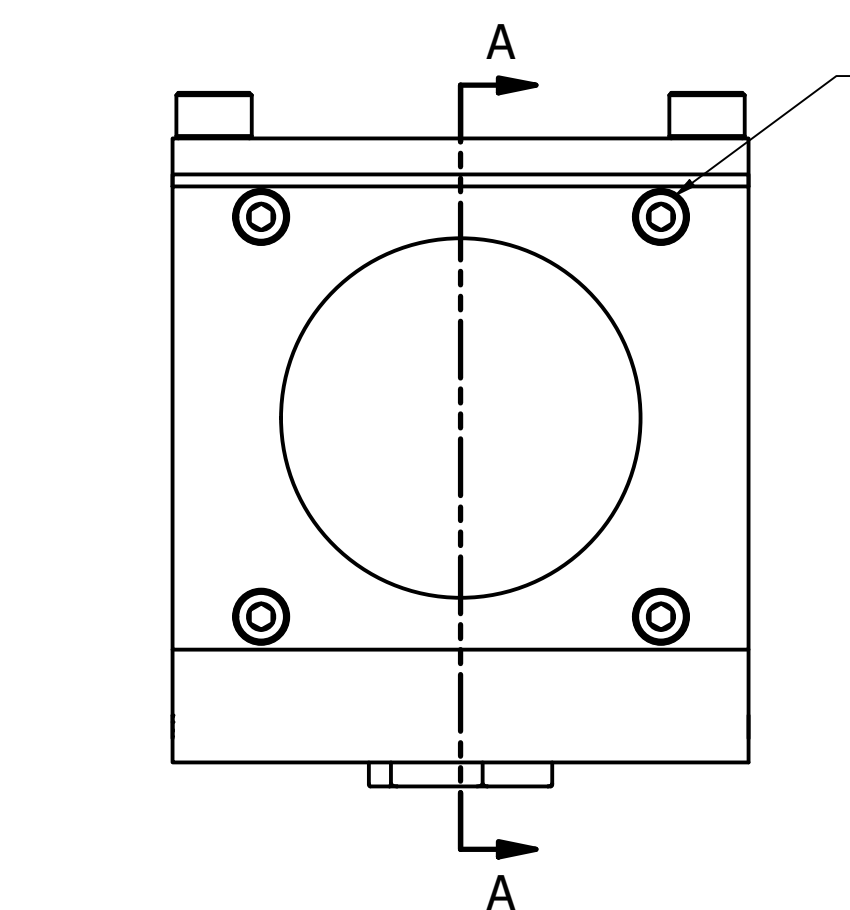


M6-1 X 16MM LG
18-8 STAINLESS STEEL S.H.C.S.
(10 SUPPLIED)



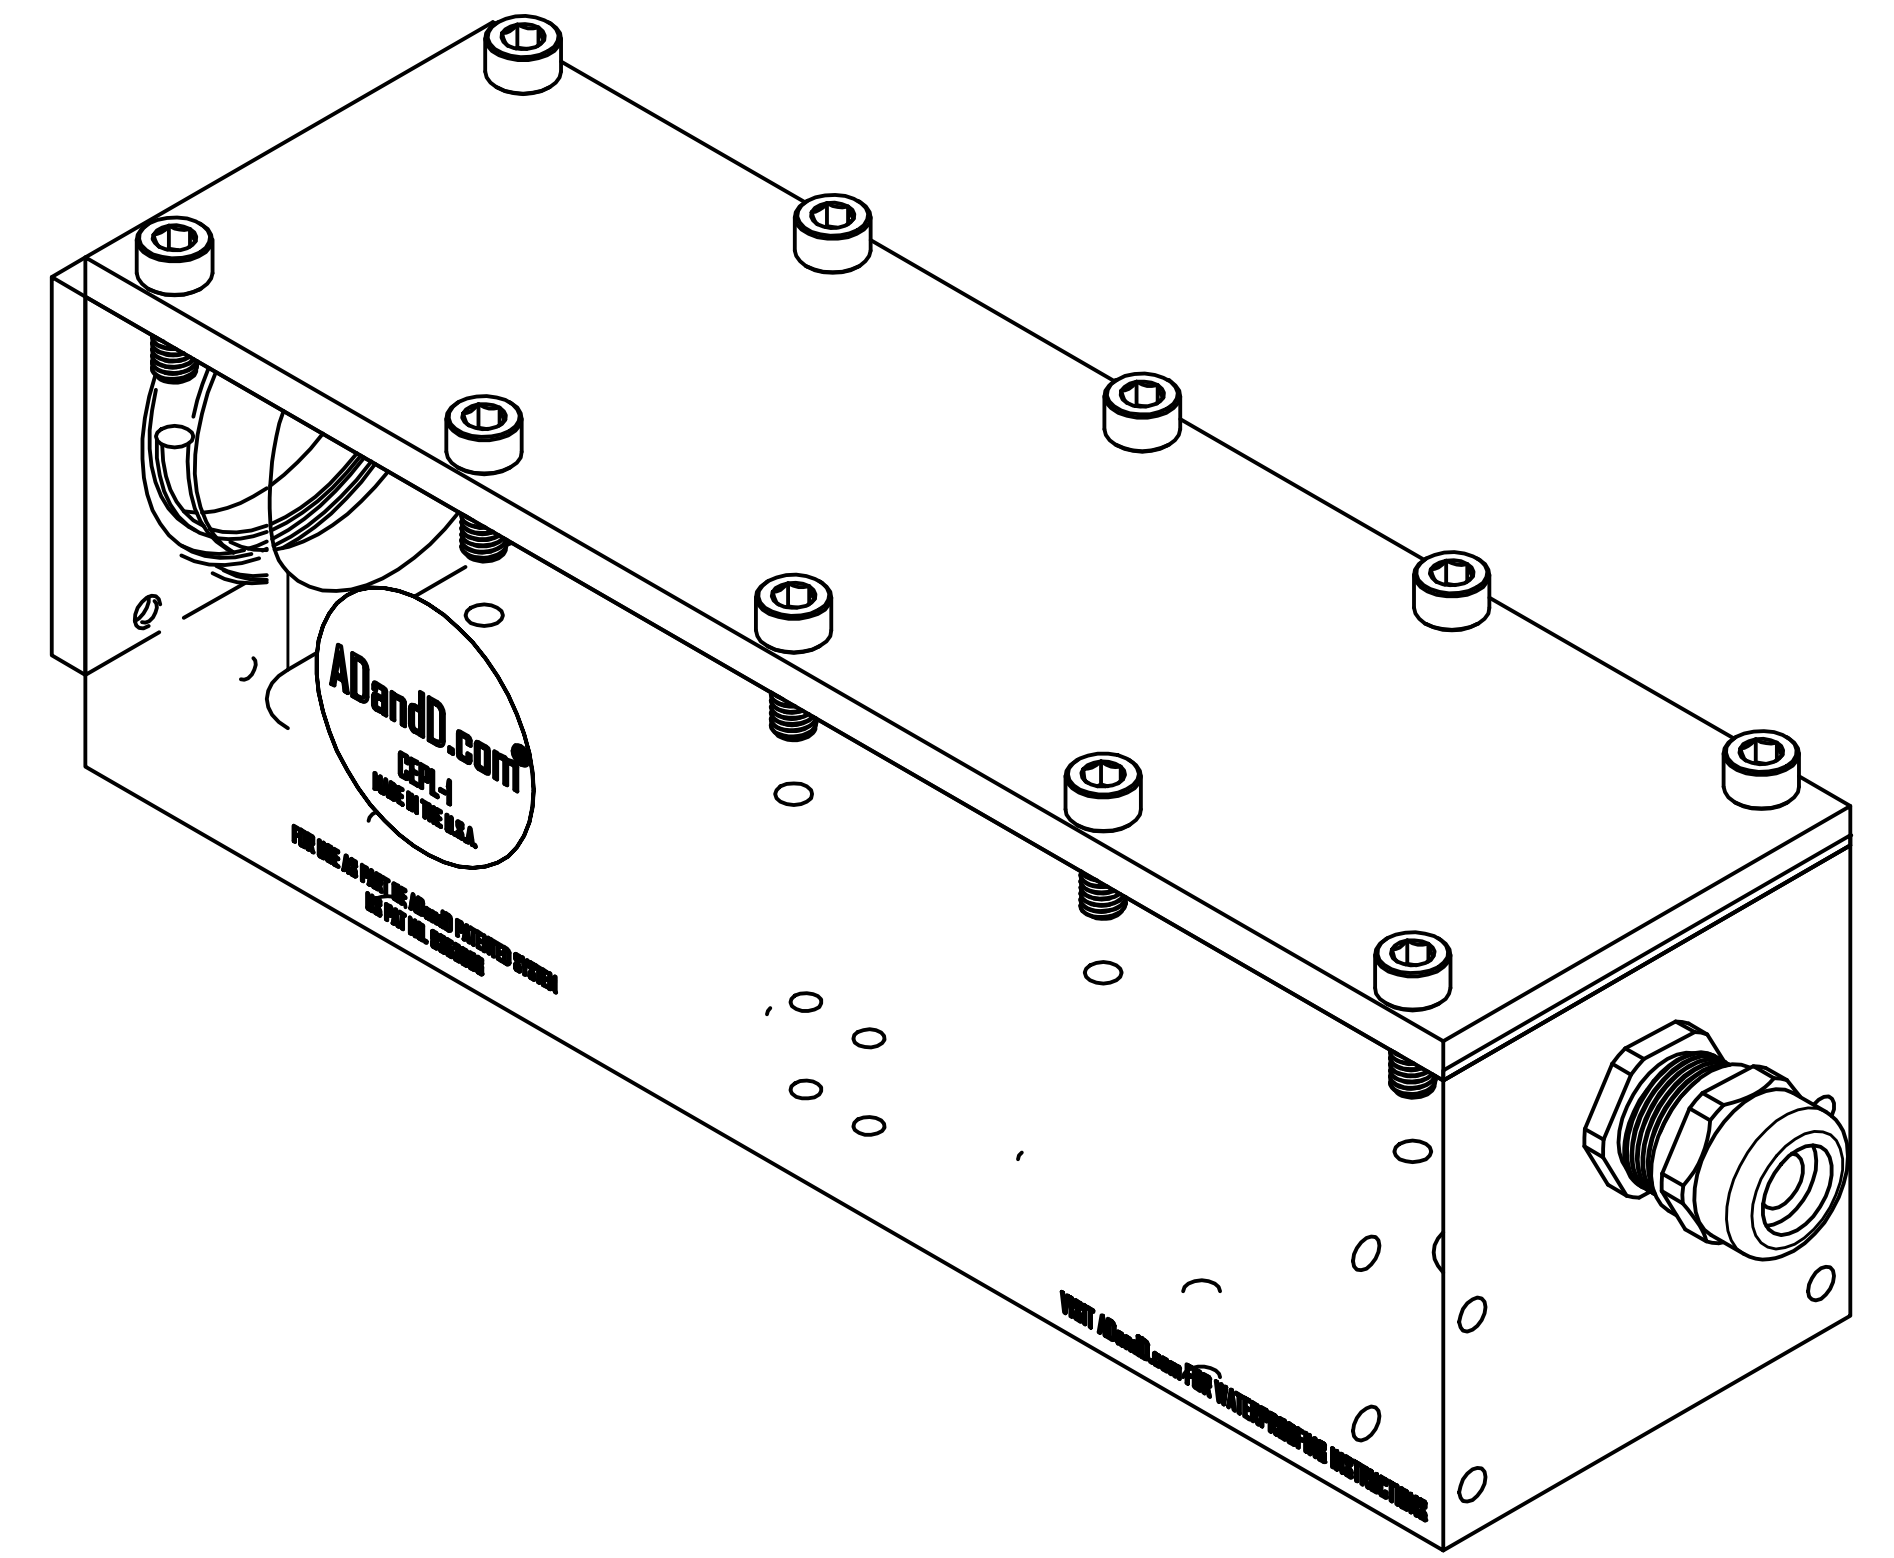


CABLE GLAND
(1 SUPPLIED)
TO BE INSTALLED BY CUSTOMER
MAY BE INSTALLED IN ANY OF THE TWO HOLE LOCATIONS

PATENT PENDING	
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS UNLESS OTHERWISE SPECIFIED	
MARK DETAILS WITH P/N, MATERIAL & HEAT TREAT SPEC UNLESS OTHERWISE SPECIFIED	
ALL WEIGHTS ARE ESTIMATED AND SHOULD NOT BE USED IN LOADING CALCULATIONS	
STANDARD TOLERANCE UNLESS OTHERWISE SPECIFIED	GEOMETRIC CHARACTERISTIC SYMBOLS PER ASME Y14.5M - 1994
2 PLACE DEC. ± .030	FLATNESS
3 PLACE DEC. ± .005	STRAIGHTNESS
4 PLACE DEC. ± .0005	CIRCULARITY
ANGLES ± 1°	CYLINDRICITY
THIRD ANGLE PROJECTION	PROFILE OF A SURFACE
	PERPENDICULARITY
	PARALLELISM
	ANGULARITY
	CIRC RUNOUT
	TOTAL RUNOUT
	POSITION
	CONCENTRICITY
	DIAMETER
	AT MAX MATL. CONDITION
	REGARDLESS OF FEATURE SIZE
	AT LEAST MATL. CONDITION
	DATUM FEATURE

A	RELEASED TO PRODUCTION	3/6/2020	NCARLSON
ZONE	REV	DESCRIPTION	DATE
REVISIONS			
ADandD.com		Pop-Link [®] Mounting Systems	
CEPL-1 CAMERA ENCLOSURE			
MATERIAL:		DESIGNED BY: DOUG	
FINISH:		DRAWN BY: NCARLSON	
WT.(LBS): N/A		DRAWN DATE: 9/6/2024	
SHEET. SIZE: D		SCALE: 1 : 1	
DETAIL NO. CAMERA ENCLOSURE			REV. A

WHEN ASSEMBLED PER THE DIRECTIONS ON THE ADandD.com VIDEO "CAMERA ENCLOSURE WATERPROOFING CABLE GLAND FITTING" THE CAMERA ENCLOSURE HAS AN IP68 RATING.

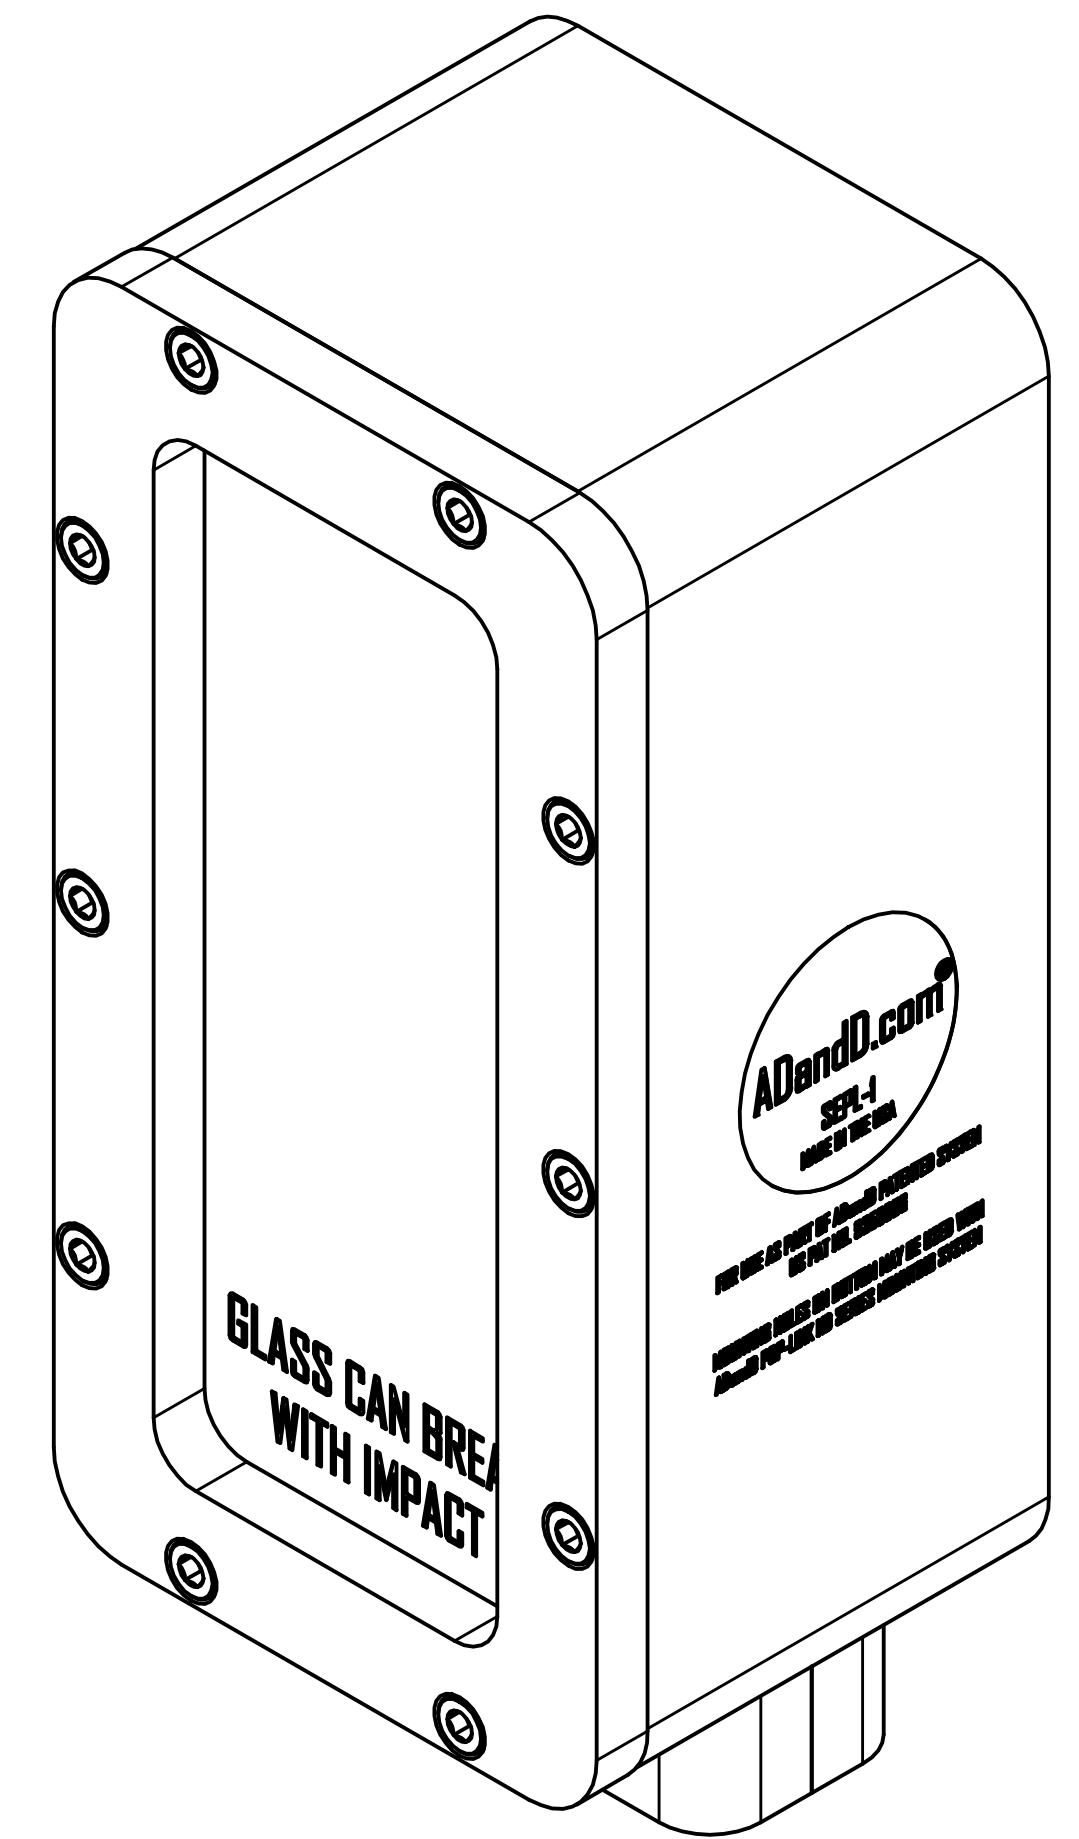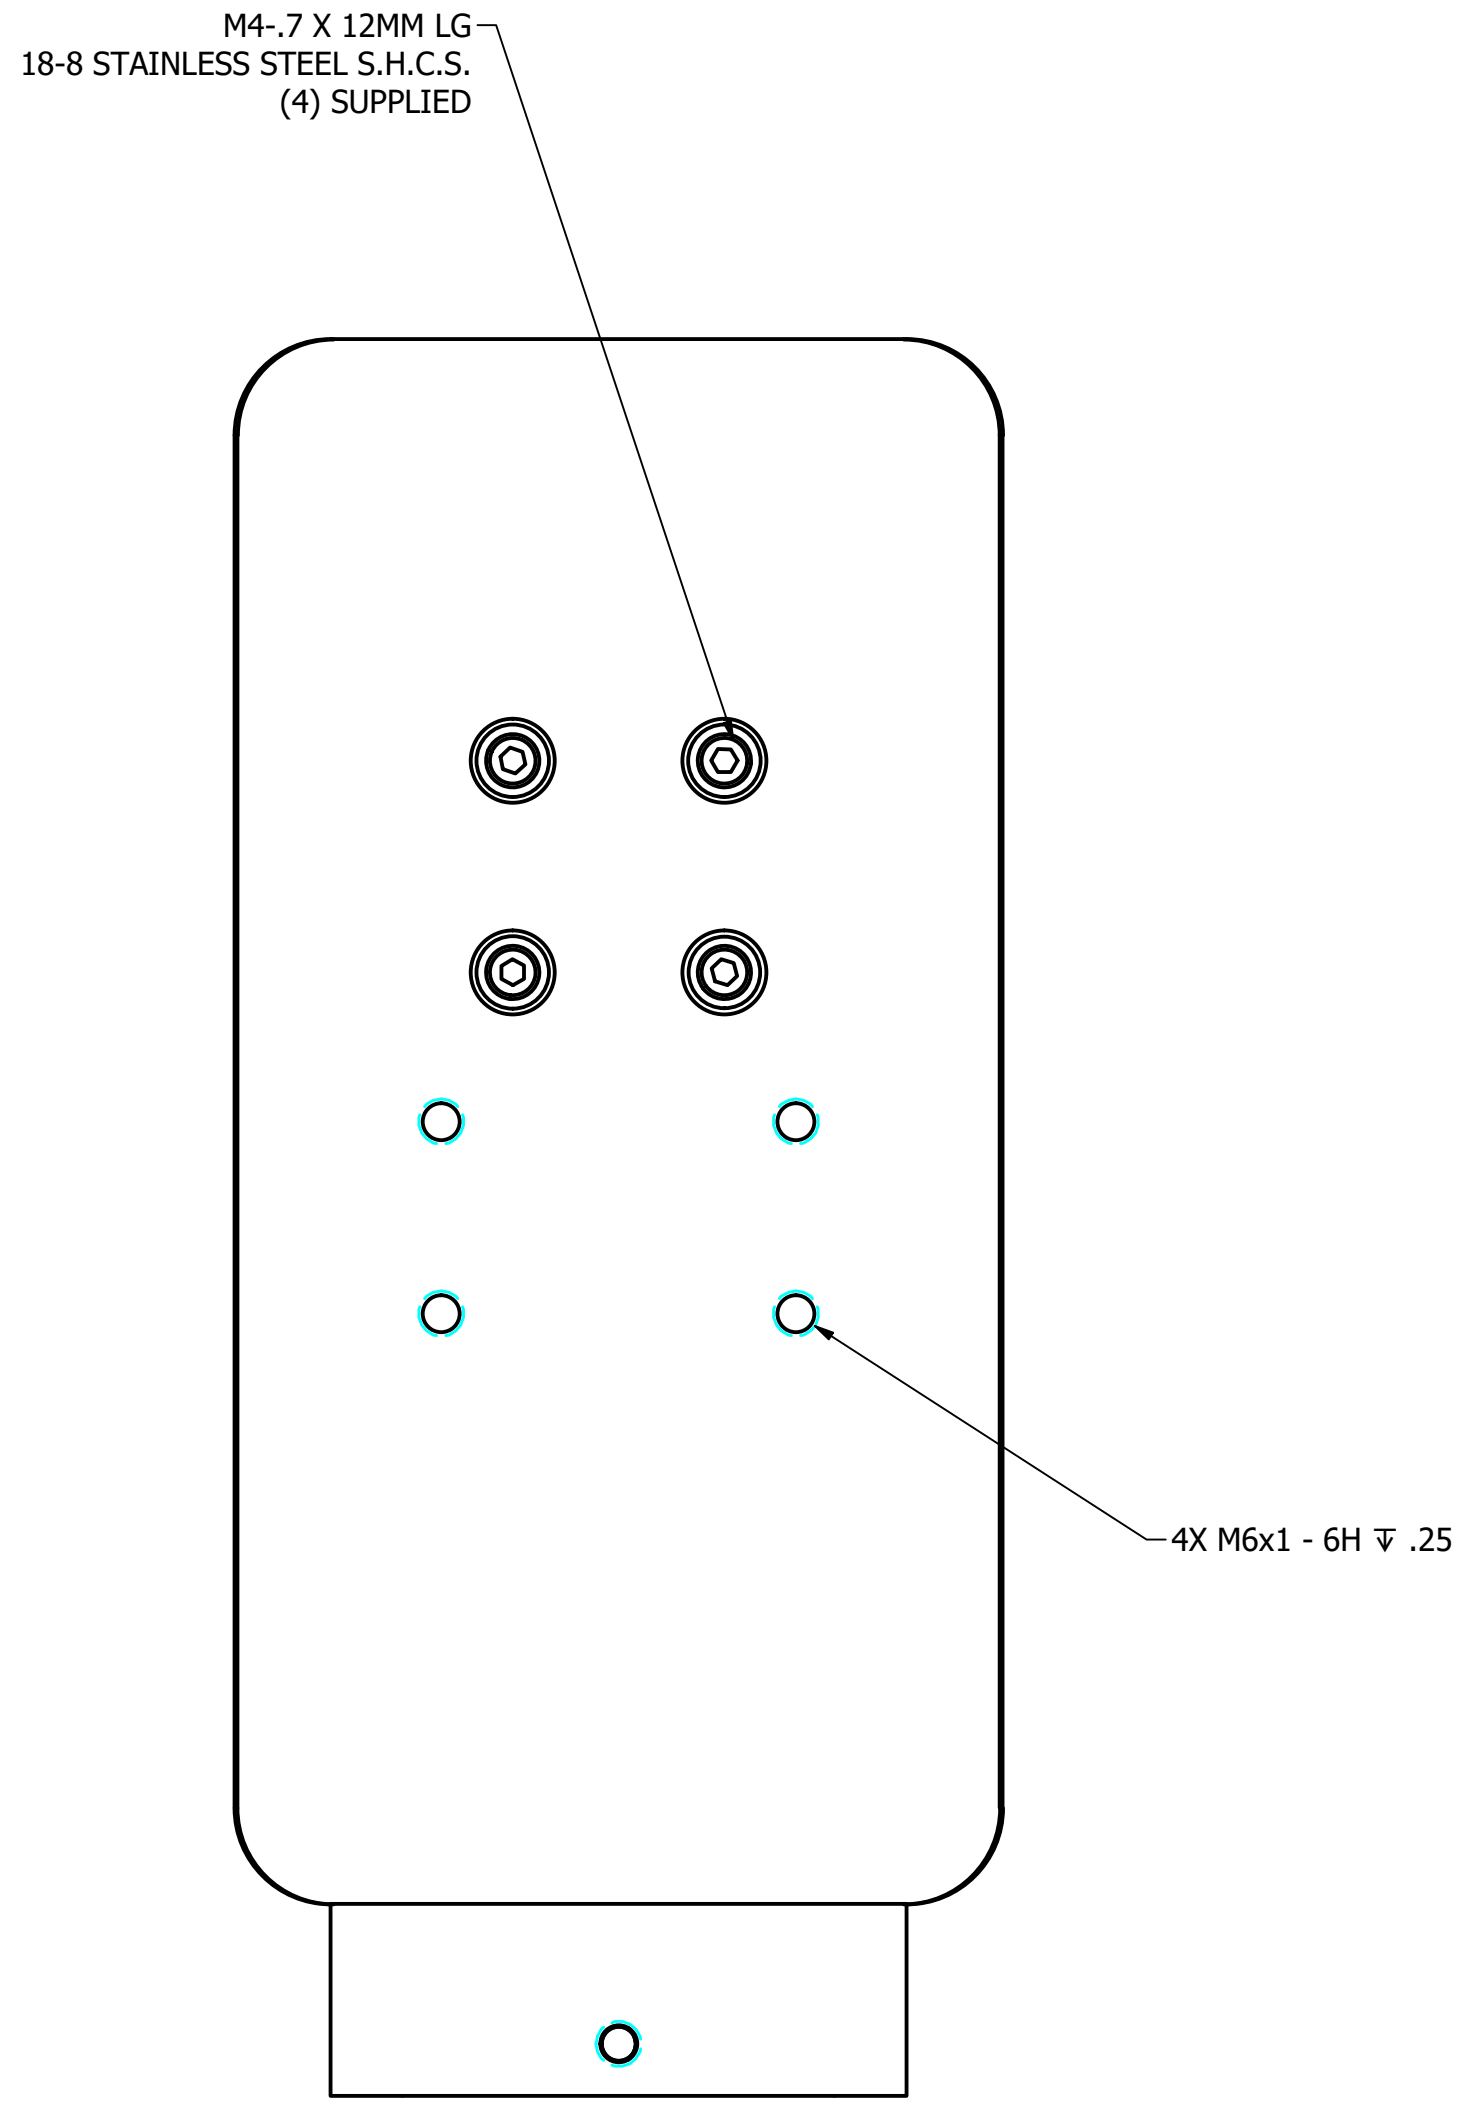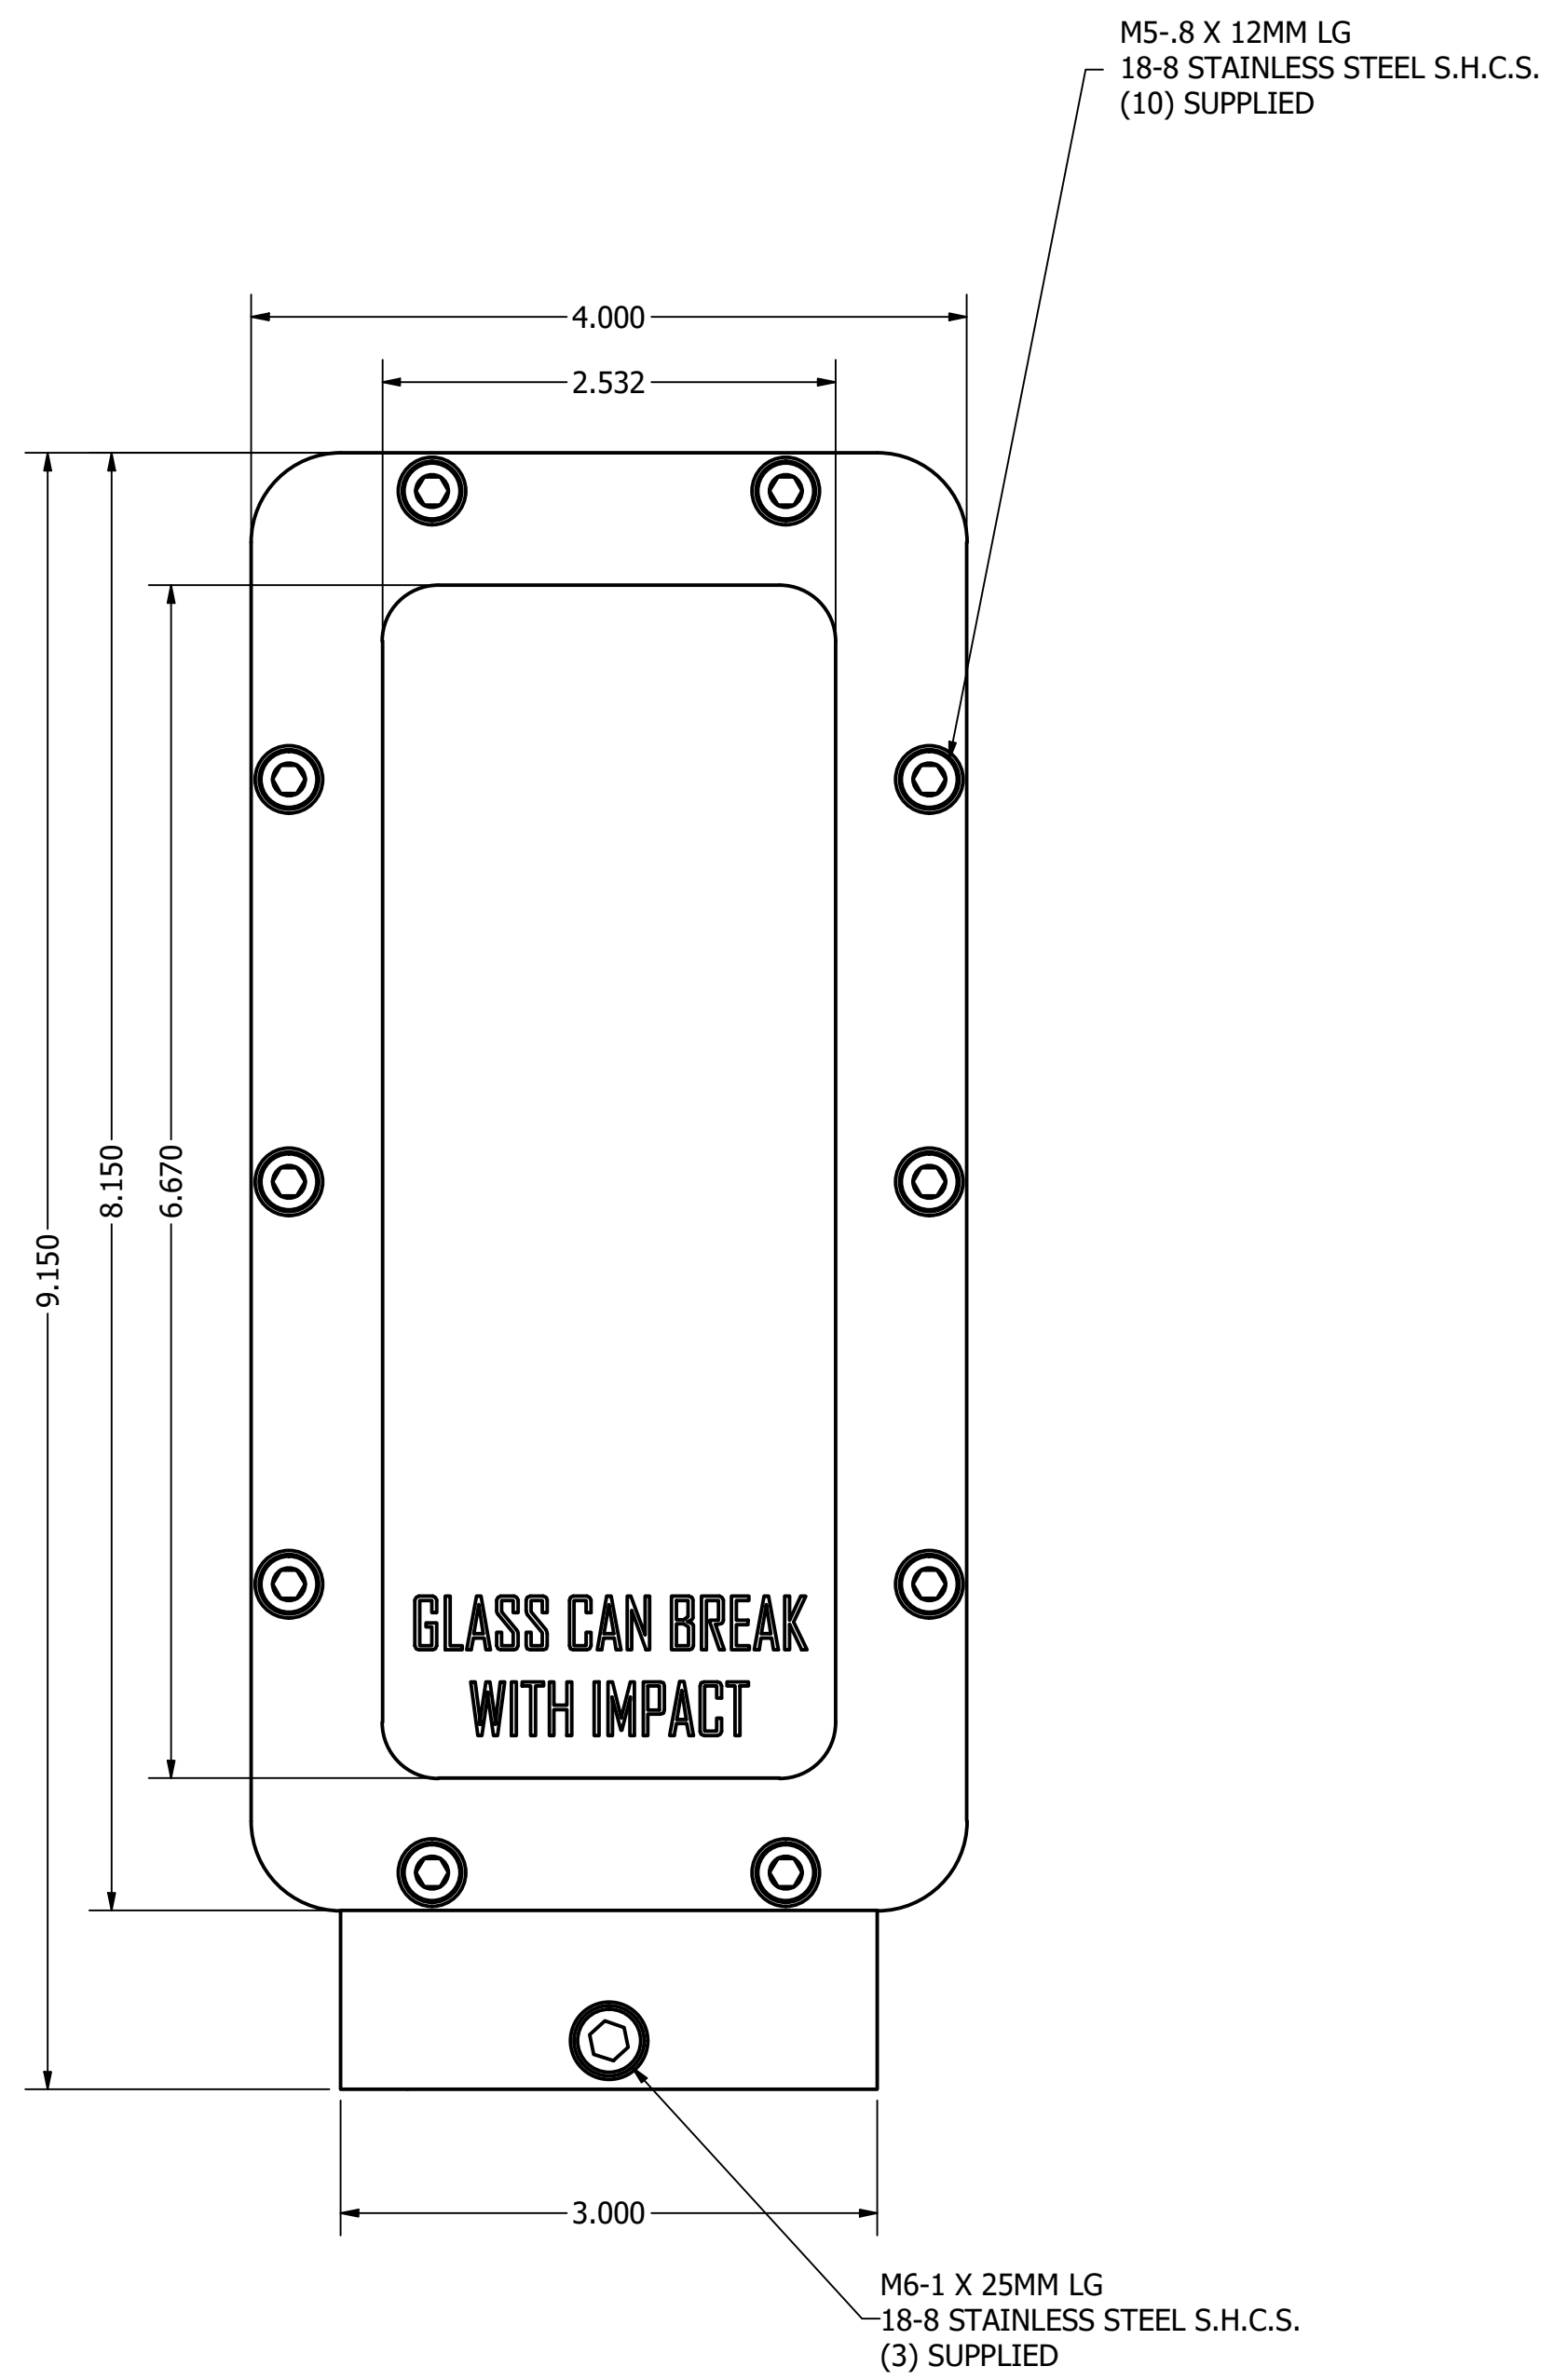

PATENT PENDING






BREAK ALL SHARP EDGES AND REMOVE ALL BURRS UNLESS OTHERWISE SPECIFIED

MARK DETAILS WITH P/N, MATERIAL & HEAT TREAT SPEC UNLESS OTHERWISE SPECIFIED

ALL WEIGHTS ARE ESTIMATED AND SHOULD NOT BE USED IN LOADING CALCULATIONS


STANDARD TOLERANCE UNLESS OTHERWISE SPECIFIED	GEOMETRIC CHARACTERISTIC SYMBOLS PER ASME Y14.5M - 1994
2 PLACE DEC. \pm .030	FLATNESS
3 PLACE DEC. \pm .005	STRAIGHTNESS
4 PLACE DEC. \pm .0005	CIRCULARITY
ANGLES \pm 1'	CYLINDRICITY
THIRD ANGLE PROJECTION	PROFILE OF A SURFACE
	PERPENDICULARITY
	PARALLELISM
	ANGULARITY
	CIRC RUNOUT
	TOTAL RUNOUT
	POSITION
	CONCENTRICITY
	DIAMETER
	AT MAX MATL. CONDITION
	REGARDLESS OF FEATURE SIZE
	AT LEAST MATL. CONDITION
	DATUM FEATURE

A	RELEASED TO PRODUCTION	3/6/2020	NCARLSON
ZONE	REV	DESCRIPTION	DATE
REVISIONS			
Pop-Link Mounting Systems			
SEPL-1 - SCANNER ENCLOSURE			
MATERIAL:		DESIGNED BY: Doug Biddinger	
FINISH:		DRAWN BY: NCARLSON	
WT.(LBS): N/A		DRAWN DATE: 9/6/2024	
SHEET. SIZE: D		SCALE: 1	
DETAIL NO. SEPL-1			REV. A

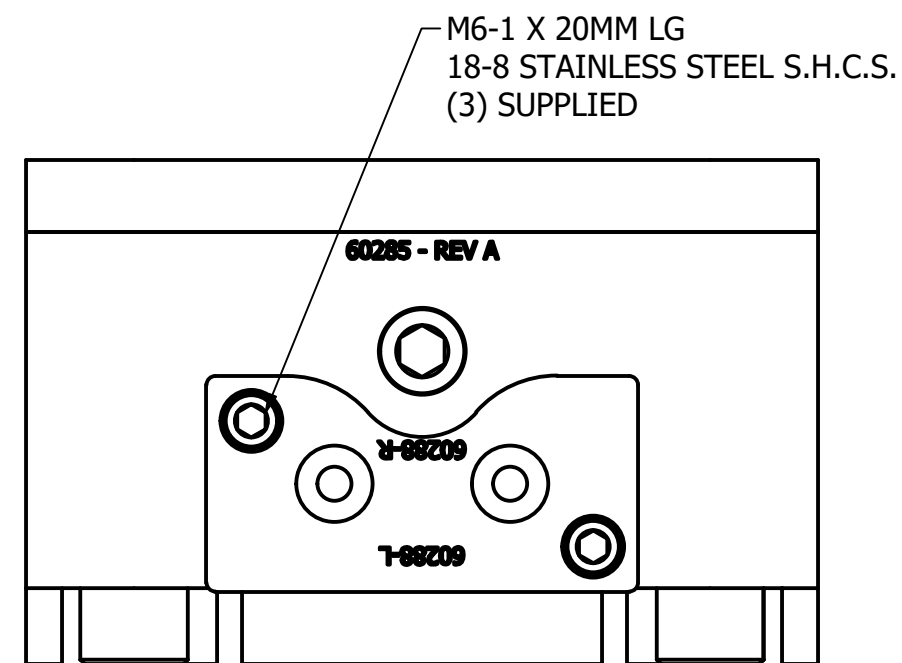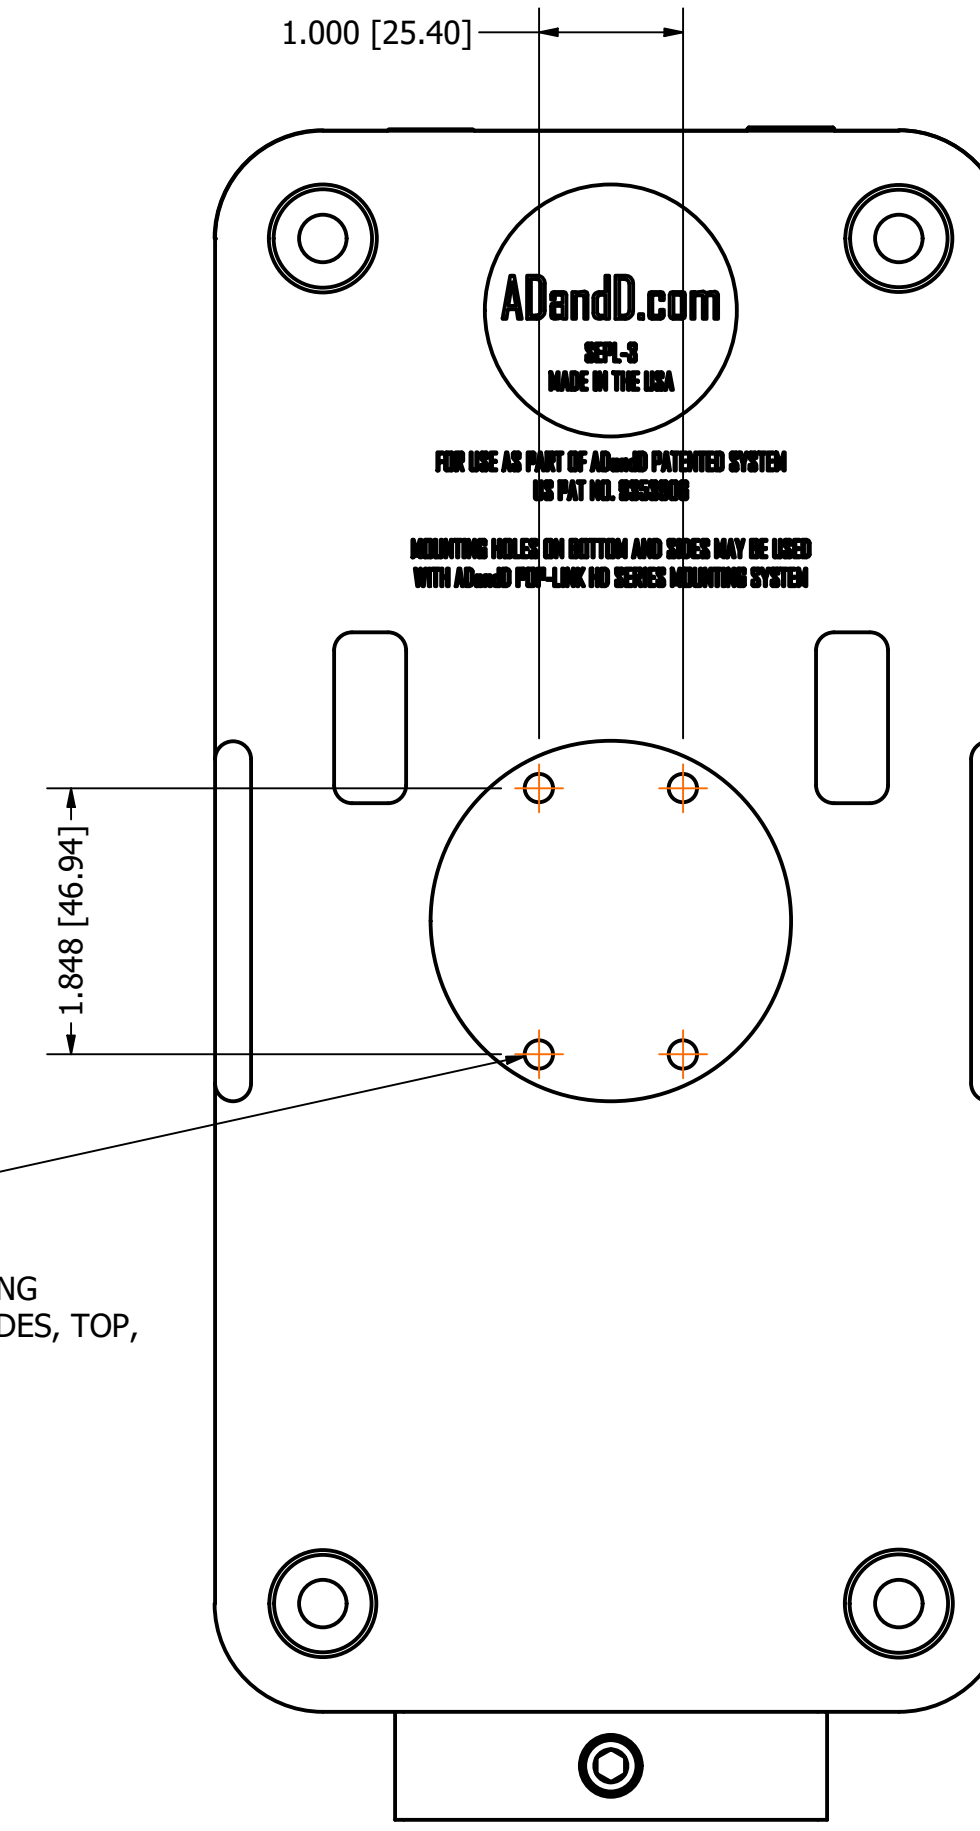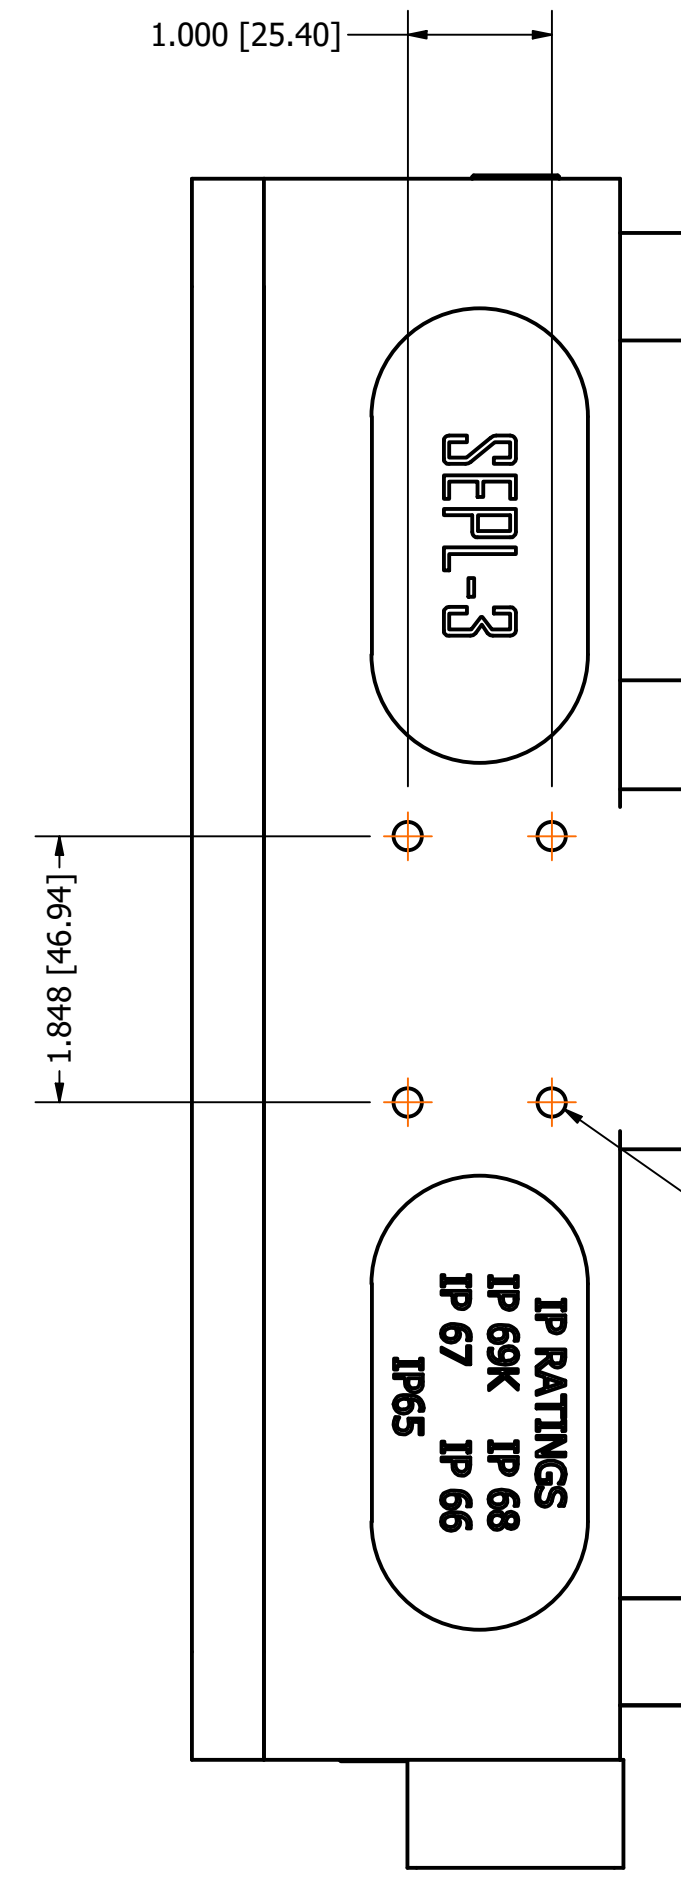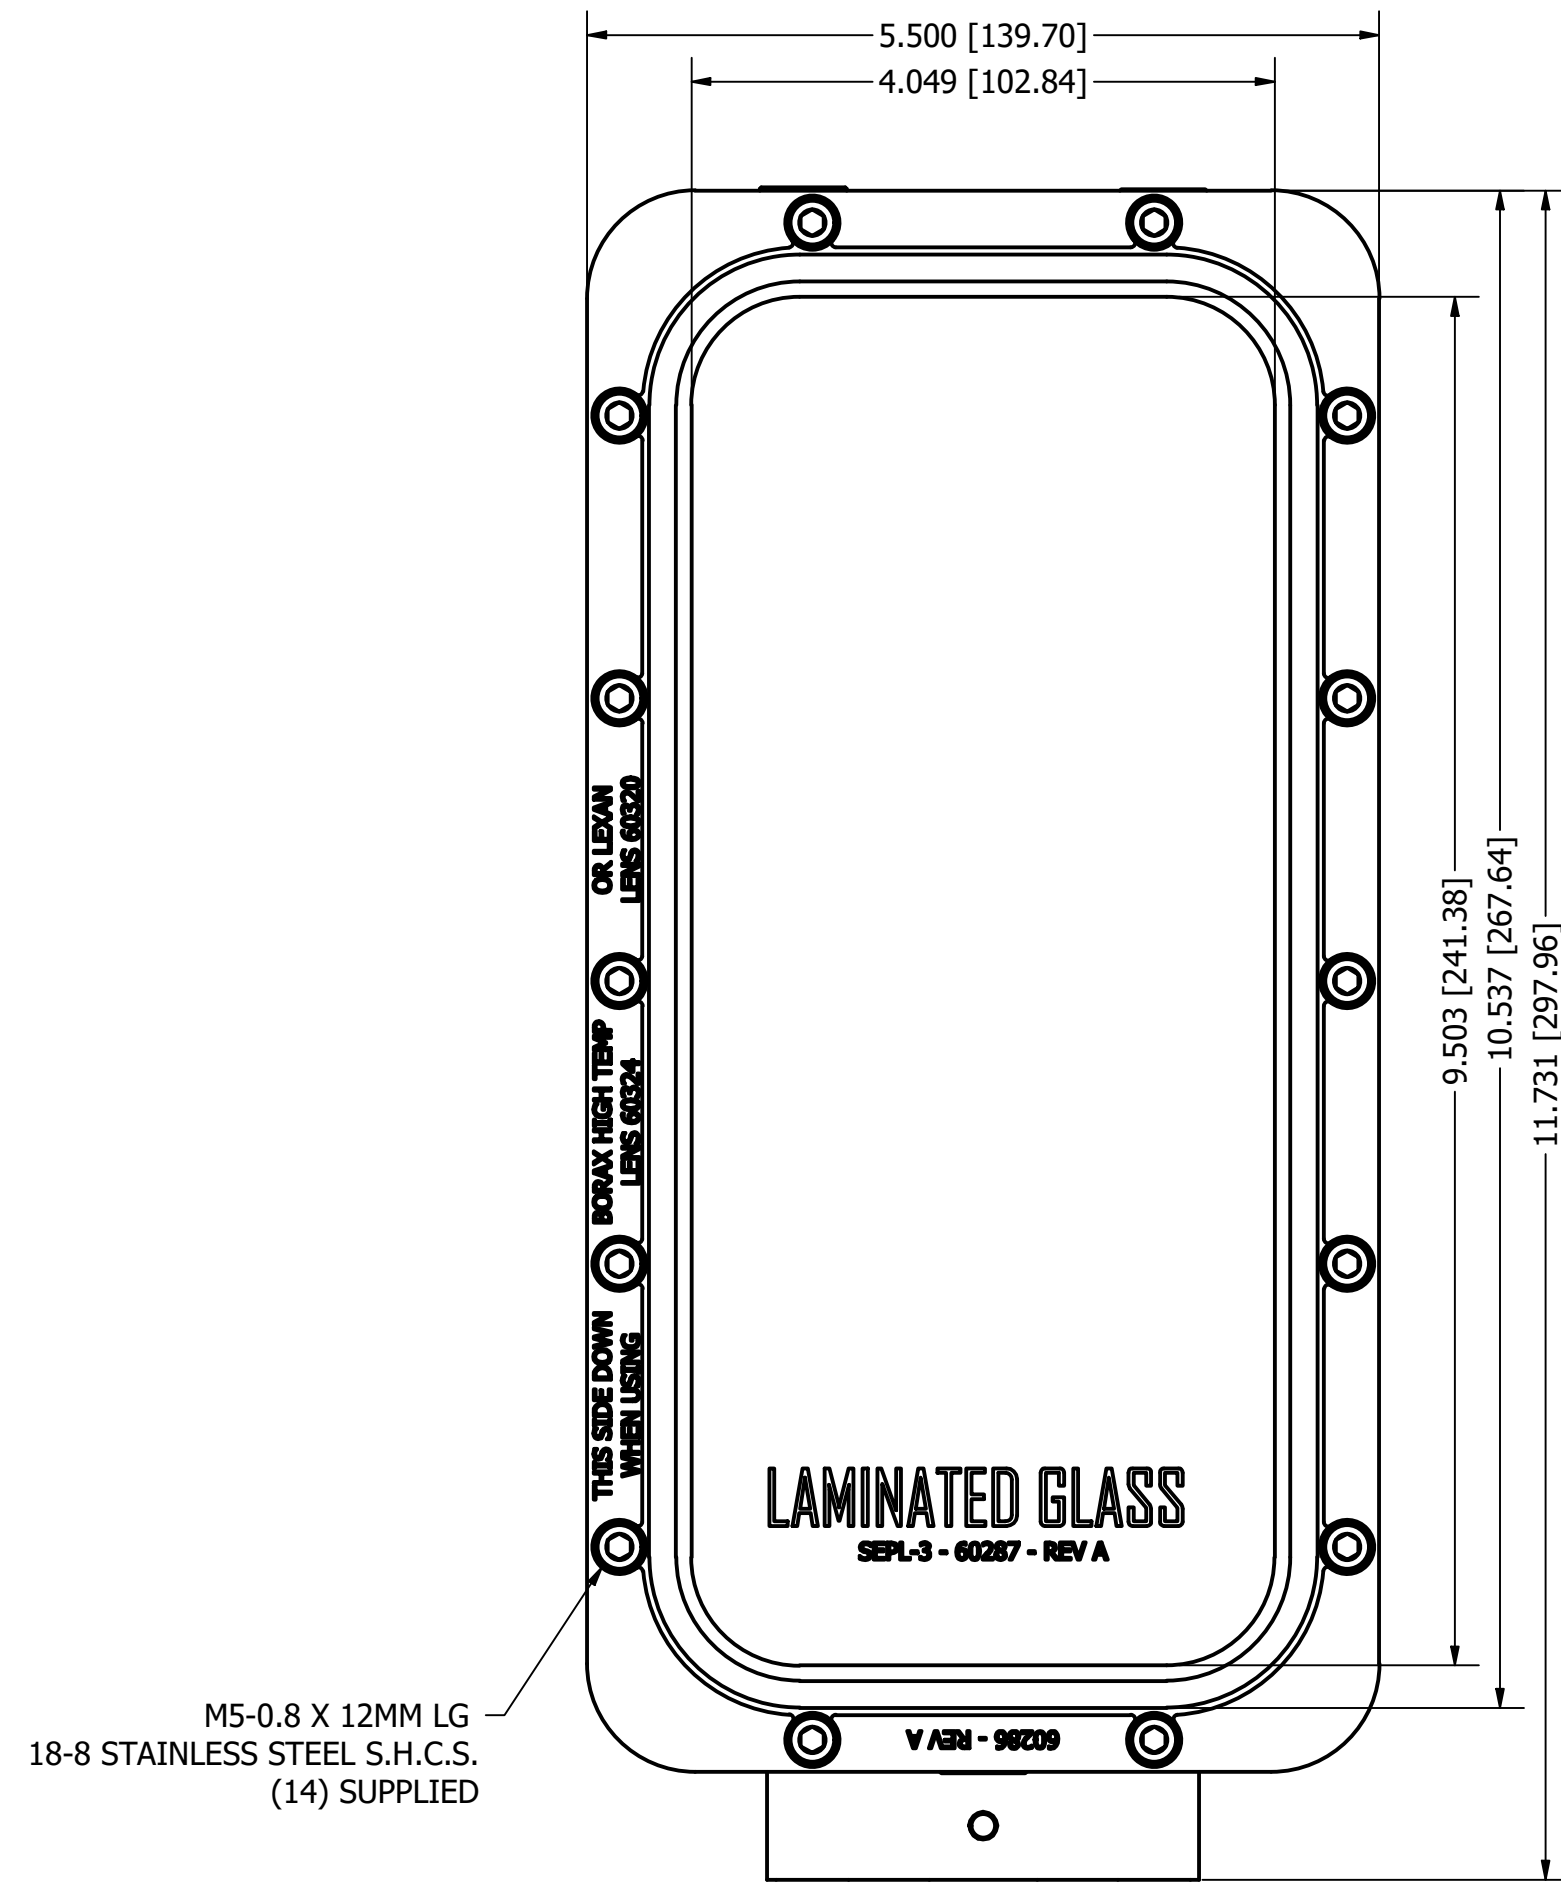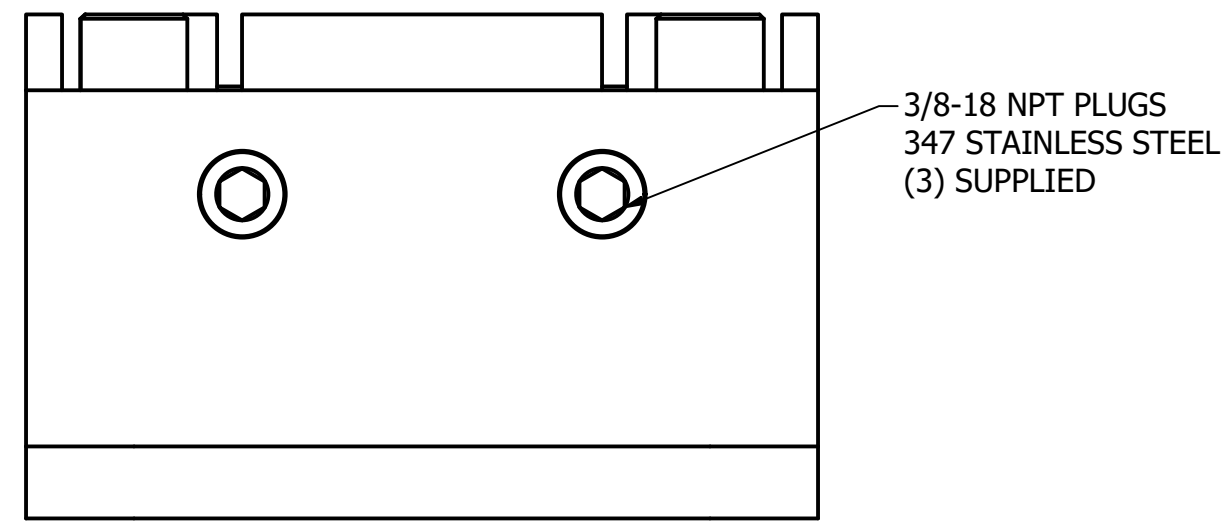


PATENT PENDING	
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS UNLESS OTHERWISE SPECIFIED	
MARK DETAILS WITH P/N, MATERIAL & HEAT TREAT SPEC UNLESS OTHERWISE SPECIFIED	
ALL WEIGHTS ARE ESTIMATED AND SHOULD NOT BE USED IN LOADING CALCULATIONS	
STANDARD TOLERANCE UNLESS OTHERWISE SPECIFIED	GEOMETRIC CHARACTERISTIC SYMBOLS PER ASME Y14.5M - 1994
2 PLACE DEC. ± .030	FLATNESS
3 PLACE DEC. ± .005	STRAIGHTNESS
4 PLACE DEC. ± .0005	CIRCULARITY
ANGLES ± 1°	CYLINDRICITY
THIRD ANGLE PROJECTION	PROFILE OF A SURFACE
	PERPENDICULARITY
	PARALLELISM
	ANGULARITY
	CIRC RUNOUT
	TOTAL RUNOUT
	POSITION
	CONCENTRICITY
	DIAMETER
	AT MAX MATL. CONDITION
	REGARDLESS OF FEATURE SIZE
	AT LEAST MATL. CONDITION
	DATUM FEATURE

A	RELEASED TO PRODUCTION	3/6/2020	N. CARLSON
ZONE	REV	DESCRIPTION	DATE
REVISIONS			
ADandD.com		Pop-Link [®] Mounting Systems	
SEPL-3			
MATERIAL:		DESIGNED BY: N. CARLSON	
FINISH:		DRAWN BY: N. CARLSON	
WT.(LBS): N/A		DRAWN DATE: 12/11/2023	
SHEET. SIZE: D		SCALE: 3/4	
DETAIL NO. SEPL-3			REV. A

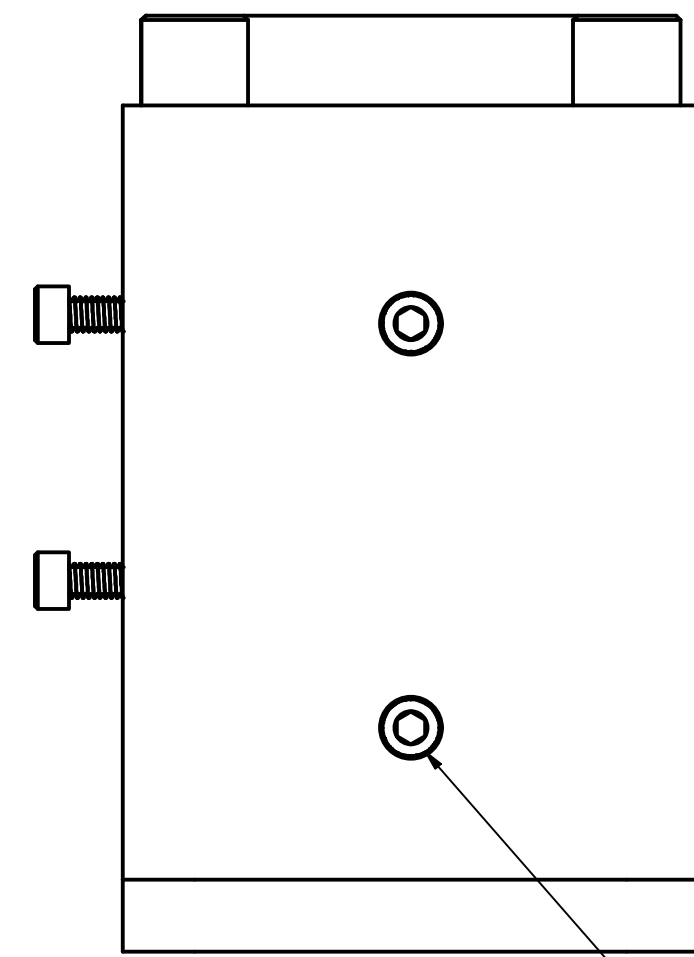

VIEW F-F
SCALE 3/4


M6-1 X 20MM LG
18-8 STAINLESS STEEL
SEALING S.H.C.S.
(2) SUPPLIED

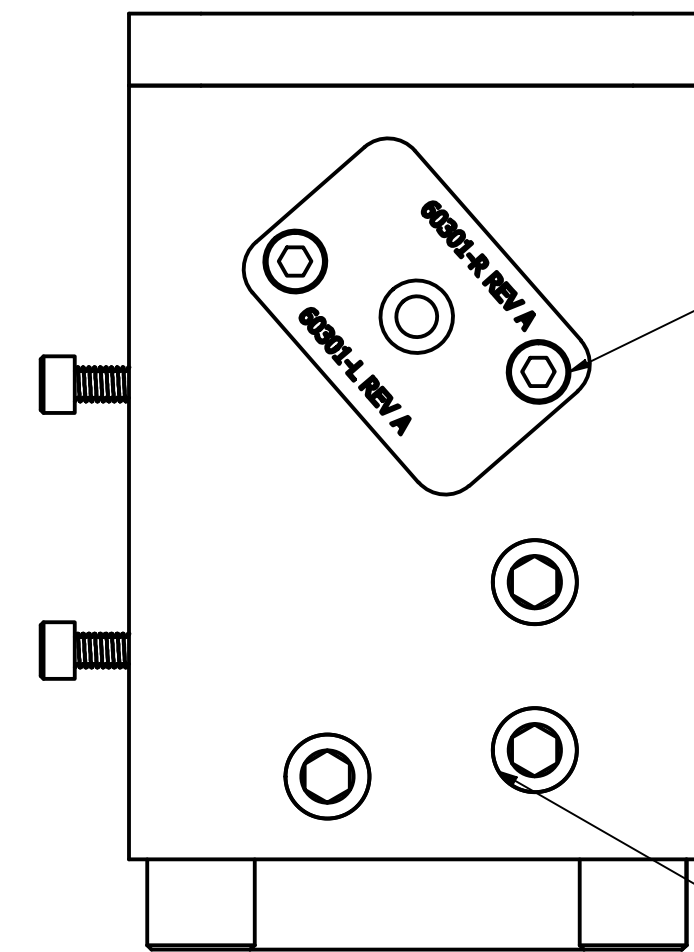

VIEW G-G
SCALE 3/4


M6-1 X 12MM LG
18-8 STAINLESS STEEL
SEALING S.H.C.S.
(2) SUPPLIED

3/8-18 NPT PLUGS
347 STAINLESS STEEL
(3) SUPPLIED

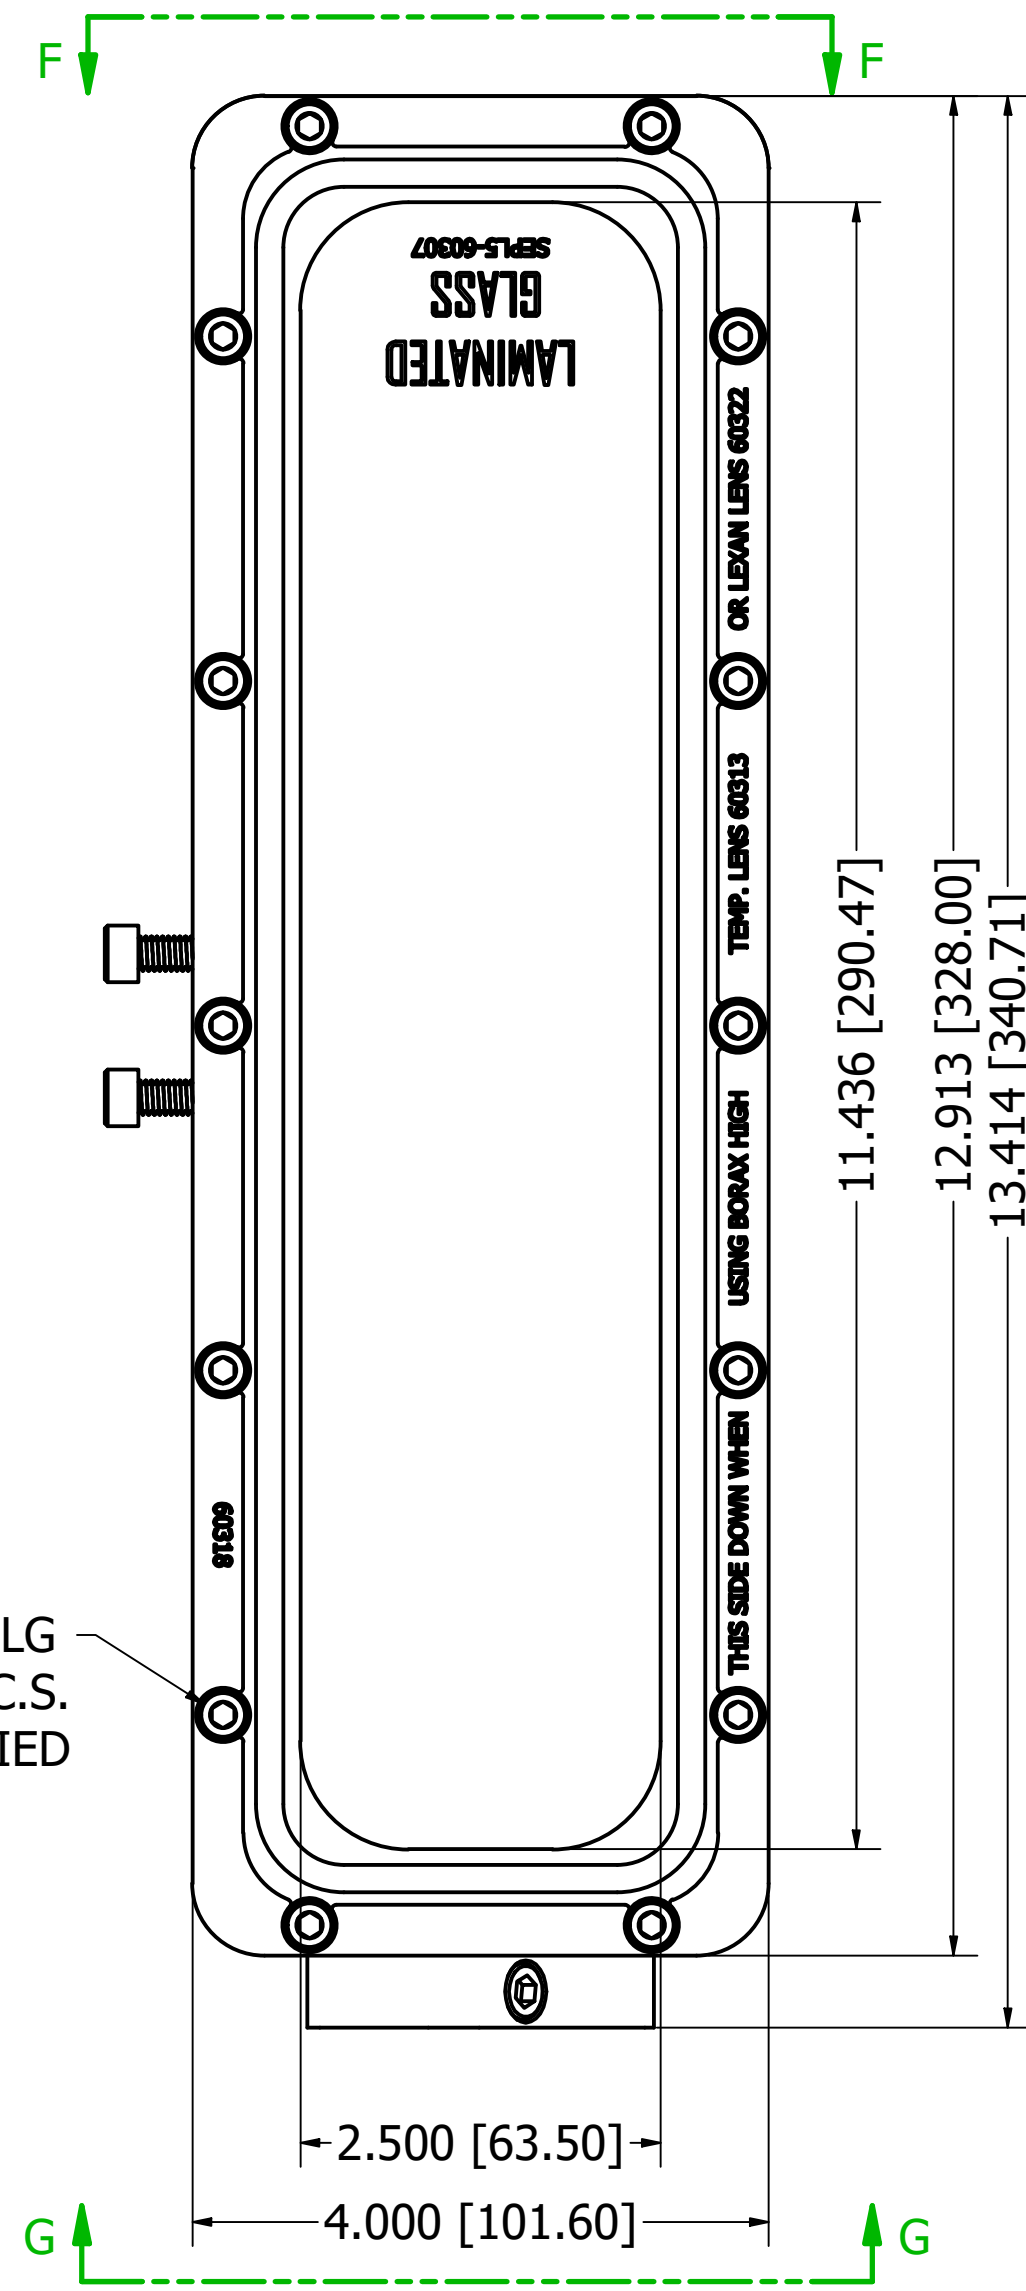

M5-0.8 X 14MM LG
18-8 STAINLESS STEEL S.H.C.S.
(14) SUPPLIED


M6-1 X 25MM LG
18-8 STAINLESS STEEL S.H.C.S.
(1) SUPPLIED

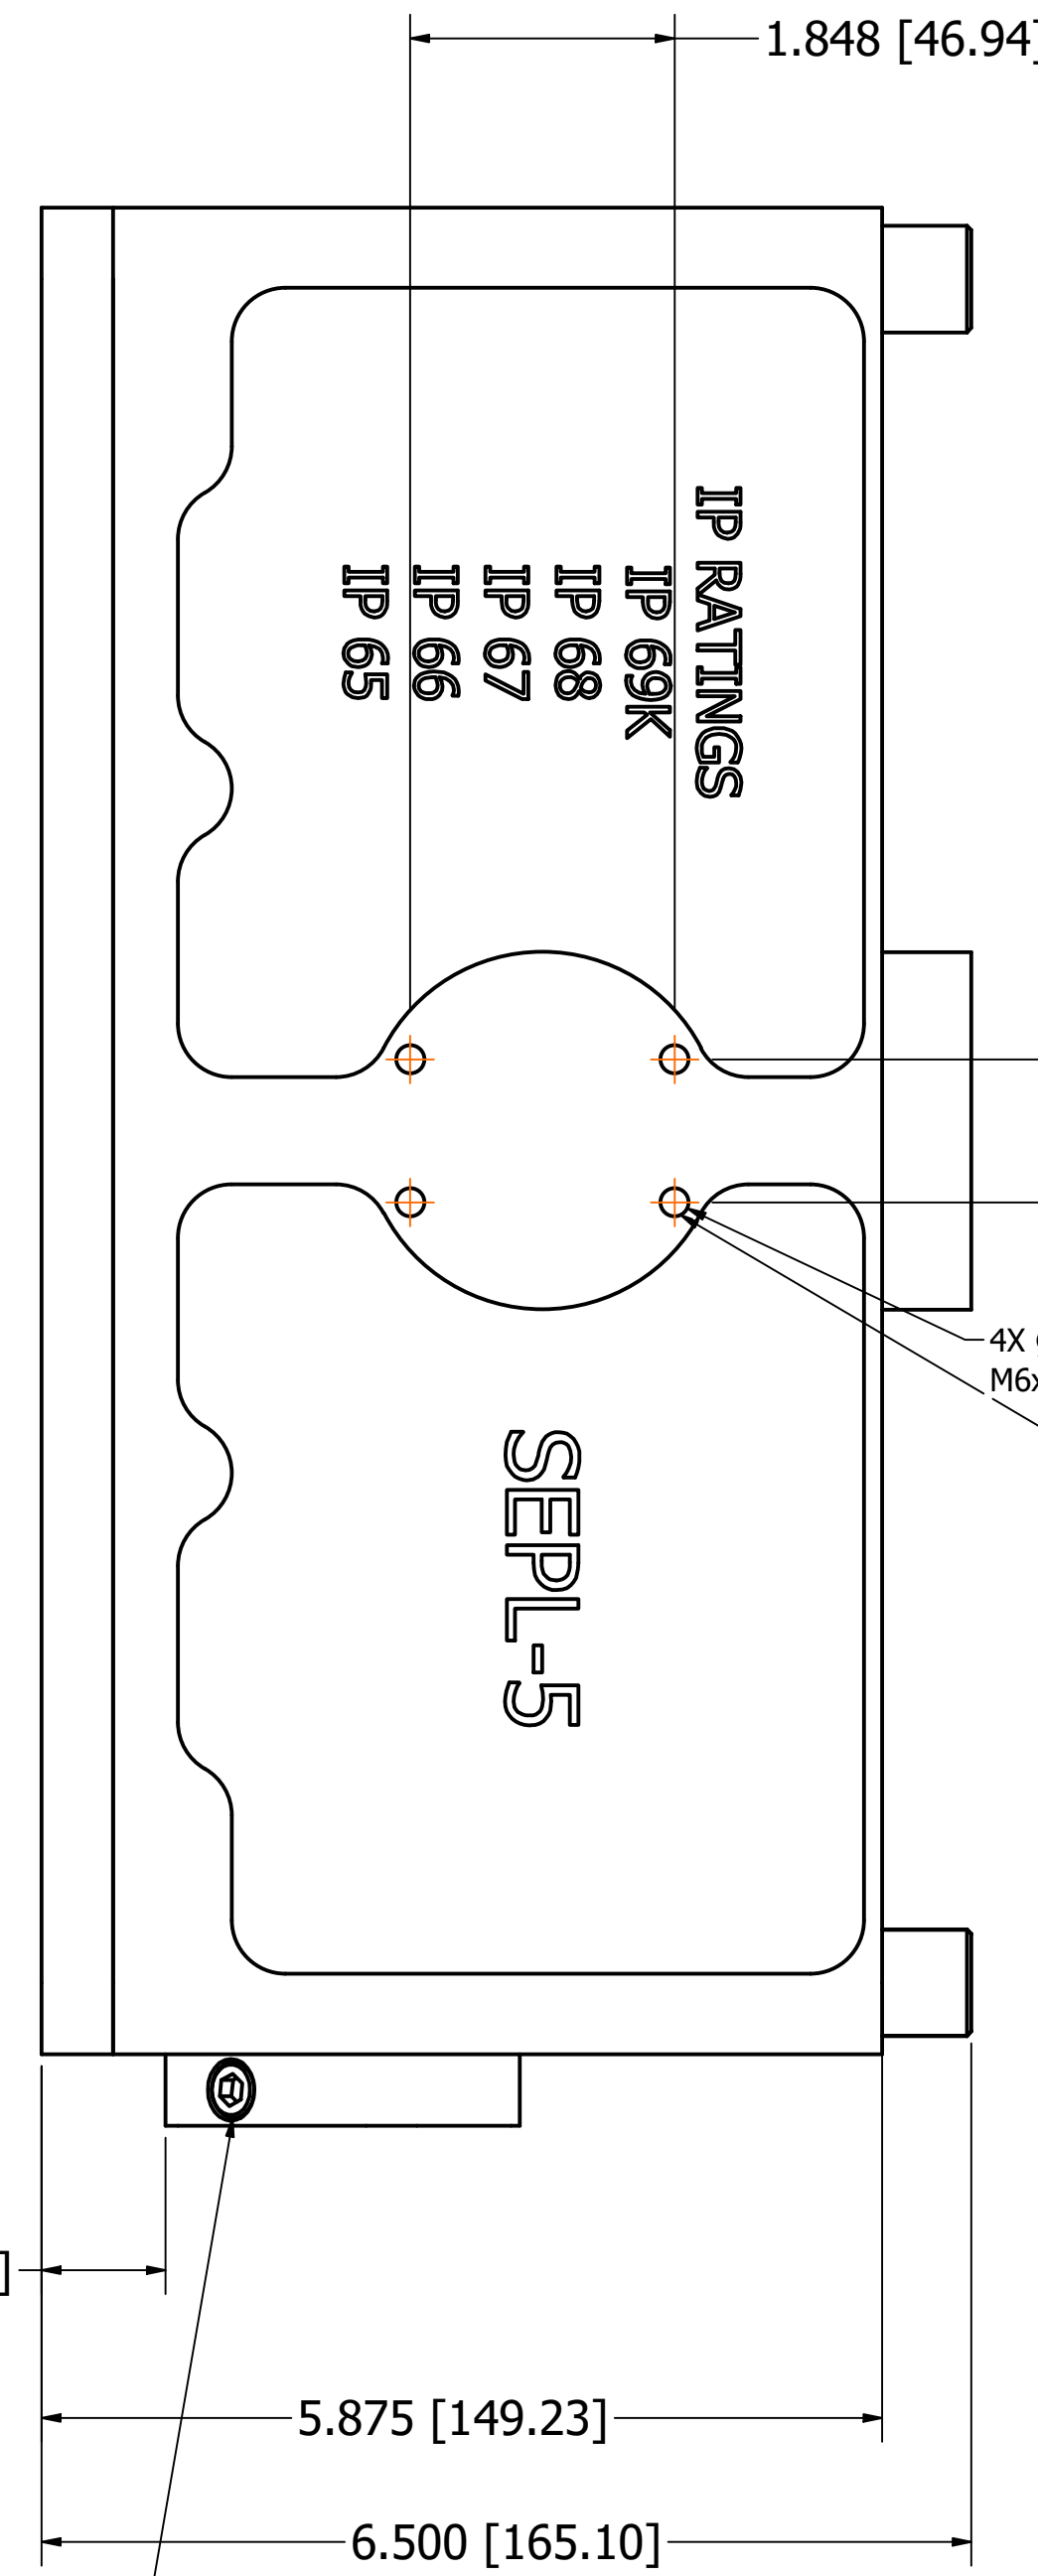

1.000 [25.40]


4X Ø.201 ± .006
M6x1 - 6H ± .380

HD POPLINK MOUNTING PATTERN ON
BOTH SIDES, TOP, AND BOTTOM.

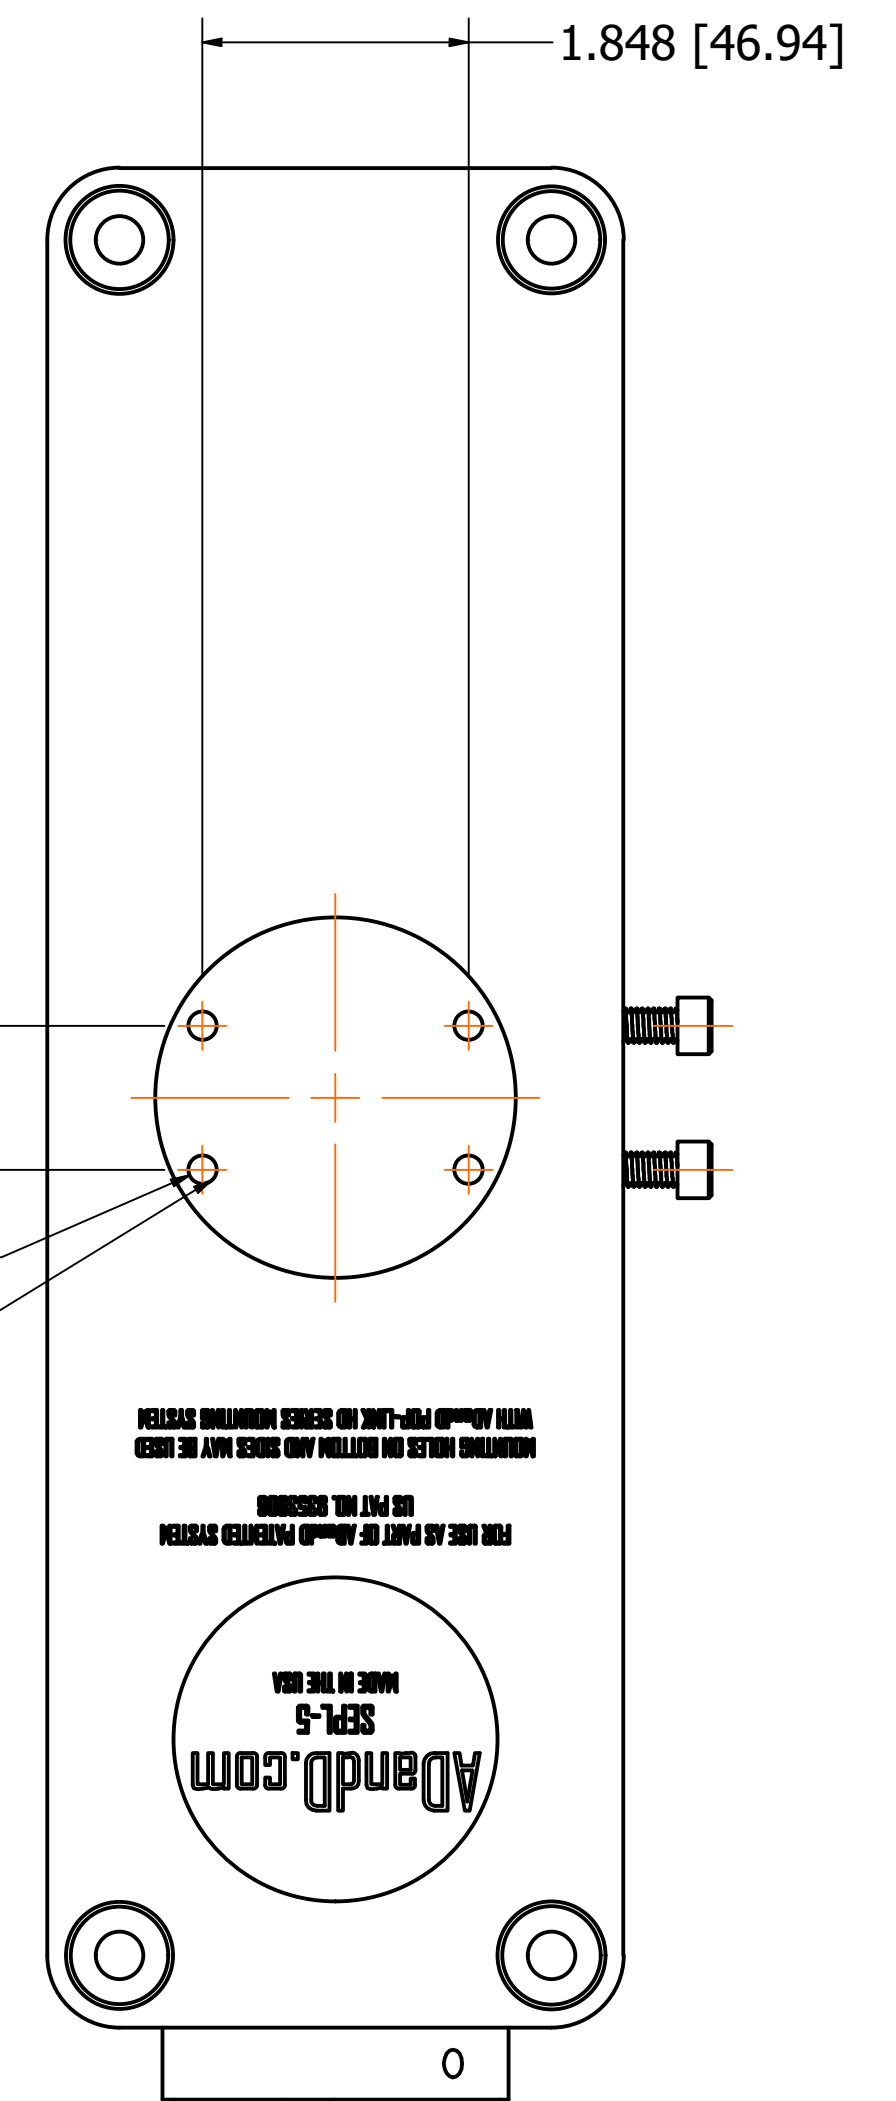


PATENT PENDING	
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS UNLESS OTHERWISE SPECIFIED	
MARK DETAILS WITH P/N, MATERIAL & HEAT TREAT SPEC UNLESS OTHERWISE SPECIFIED	
ALL WEIGHTS ARE ESTIMATED AND SHOULD NOT BE USED IN LOADING CALCULATIONS	
STANDARD TOLERANCE UNLESS OTHERWISE SPECIFIED	GEOMETRIC CHARACTERISTIC SYMBOLS PER ASME Y14.5M - 1994
2 PLACE DEC. ± .030	FLATNESS
3 PLACE DEC. ± .005	STRAIGHTNESS
4 PLACE DEC. ± .0005	CIRCULARITY
ANGLES ± 1°	CYLINDRICITY
THIRD ANGLE PROJECTION	PROFILE OF A SURFACE
	PERPENDICULARITY
	PARALLELISM
	ANGULARITY
	CIRC RUNOUT
	TOTAL RUNOUT
	POSITION
	CONCENTRICITY
	DIAMETER
	AT MAX MATL. CONDITION
	REGARDLESS OF FEATURE SIZE
	AT LEAST MATL. CONDITION
	DATUM FEATURE

-	RELEASED TO PRODUCTION	3/15/2024	S.A.R.
ZONE	REV	DESCRIPTION	DATE
REVISIONS			
Pop-Link Mounting Systems			
SEPL-5 ENCLOSURE			
MATERIAL:		DESIGNED BY: S.A.R.	
FINISH:		DRAWN BY: S.A.R.	
WT.(LBS): N/A		DRAWN DATE: 3/15/2024	
		SHEET. SIZE: D	SCALE: 3/4
DETAIL NO. SEPL-5			REV. -

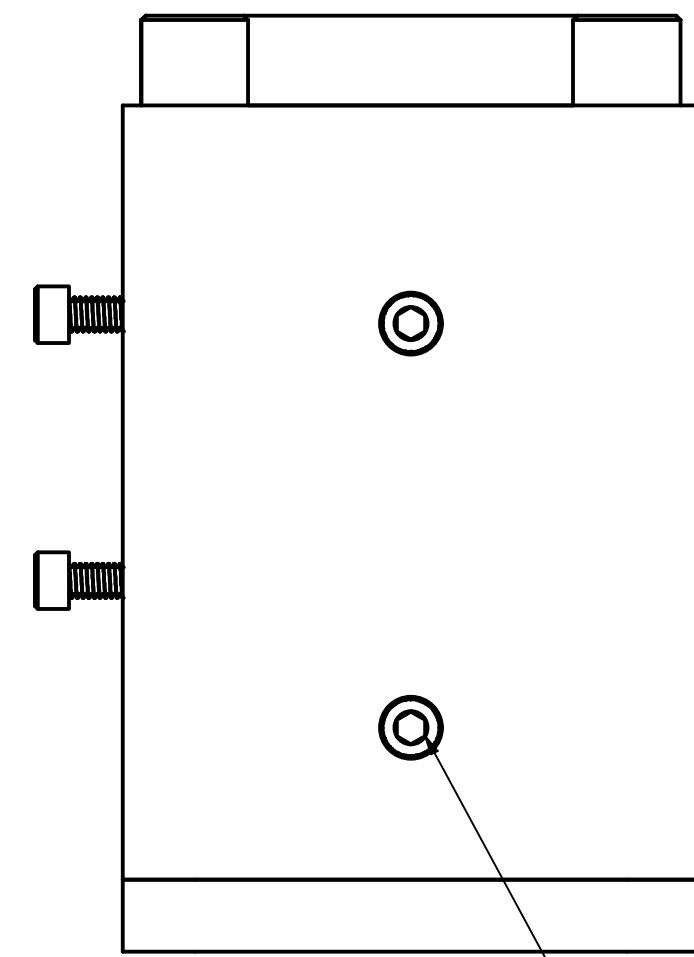

VIEW F-F
SCALE 3/4
M6-1 X 20MM LG
18-8 STAINLESS STEEL
SEALING S.H.C.S.
(2) SUPPLIED

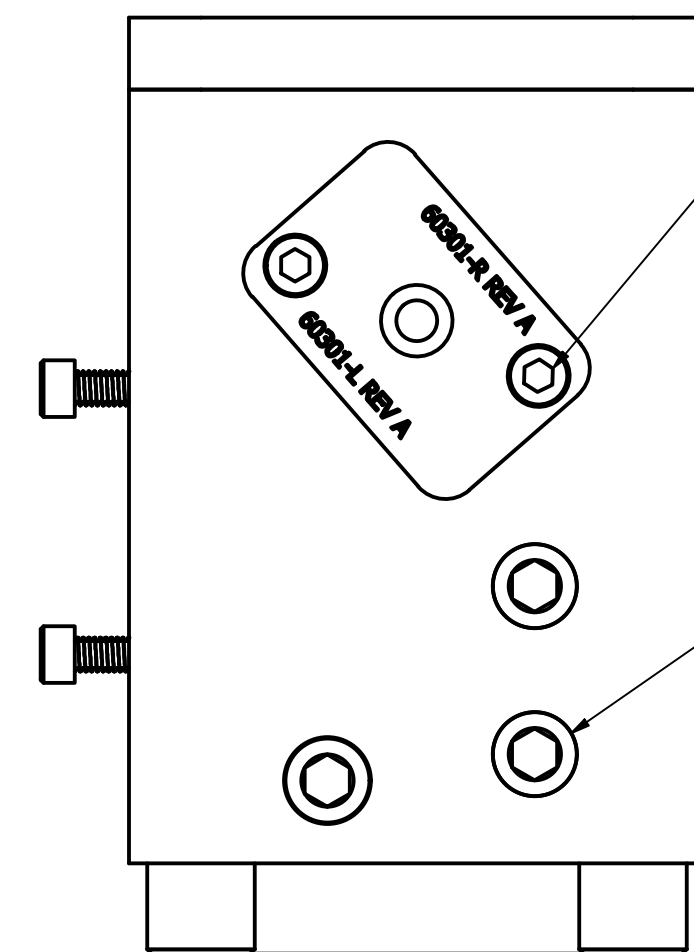


VIEW G-G
SCALE 3/4


M6-1 X 12MM LG
18-8 STAINLESS STEEL
SEALING S.H.C.S.
(2) SUPPLIED

3/8-18 NPT PLUGS
347 STAINLESS STEEL
(3) SUPPLIED

M5-0.8 X 14MM LG
18-8 STAINLESS STEEL S.H.C.S.
(18) SUPPLIED

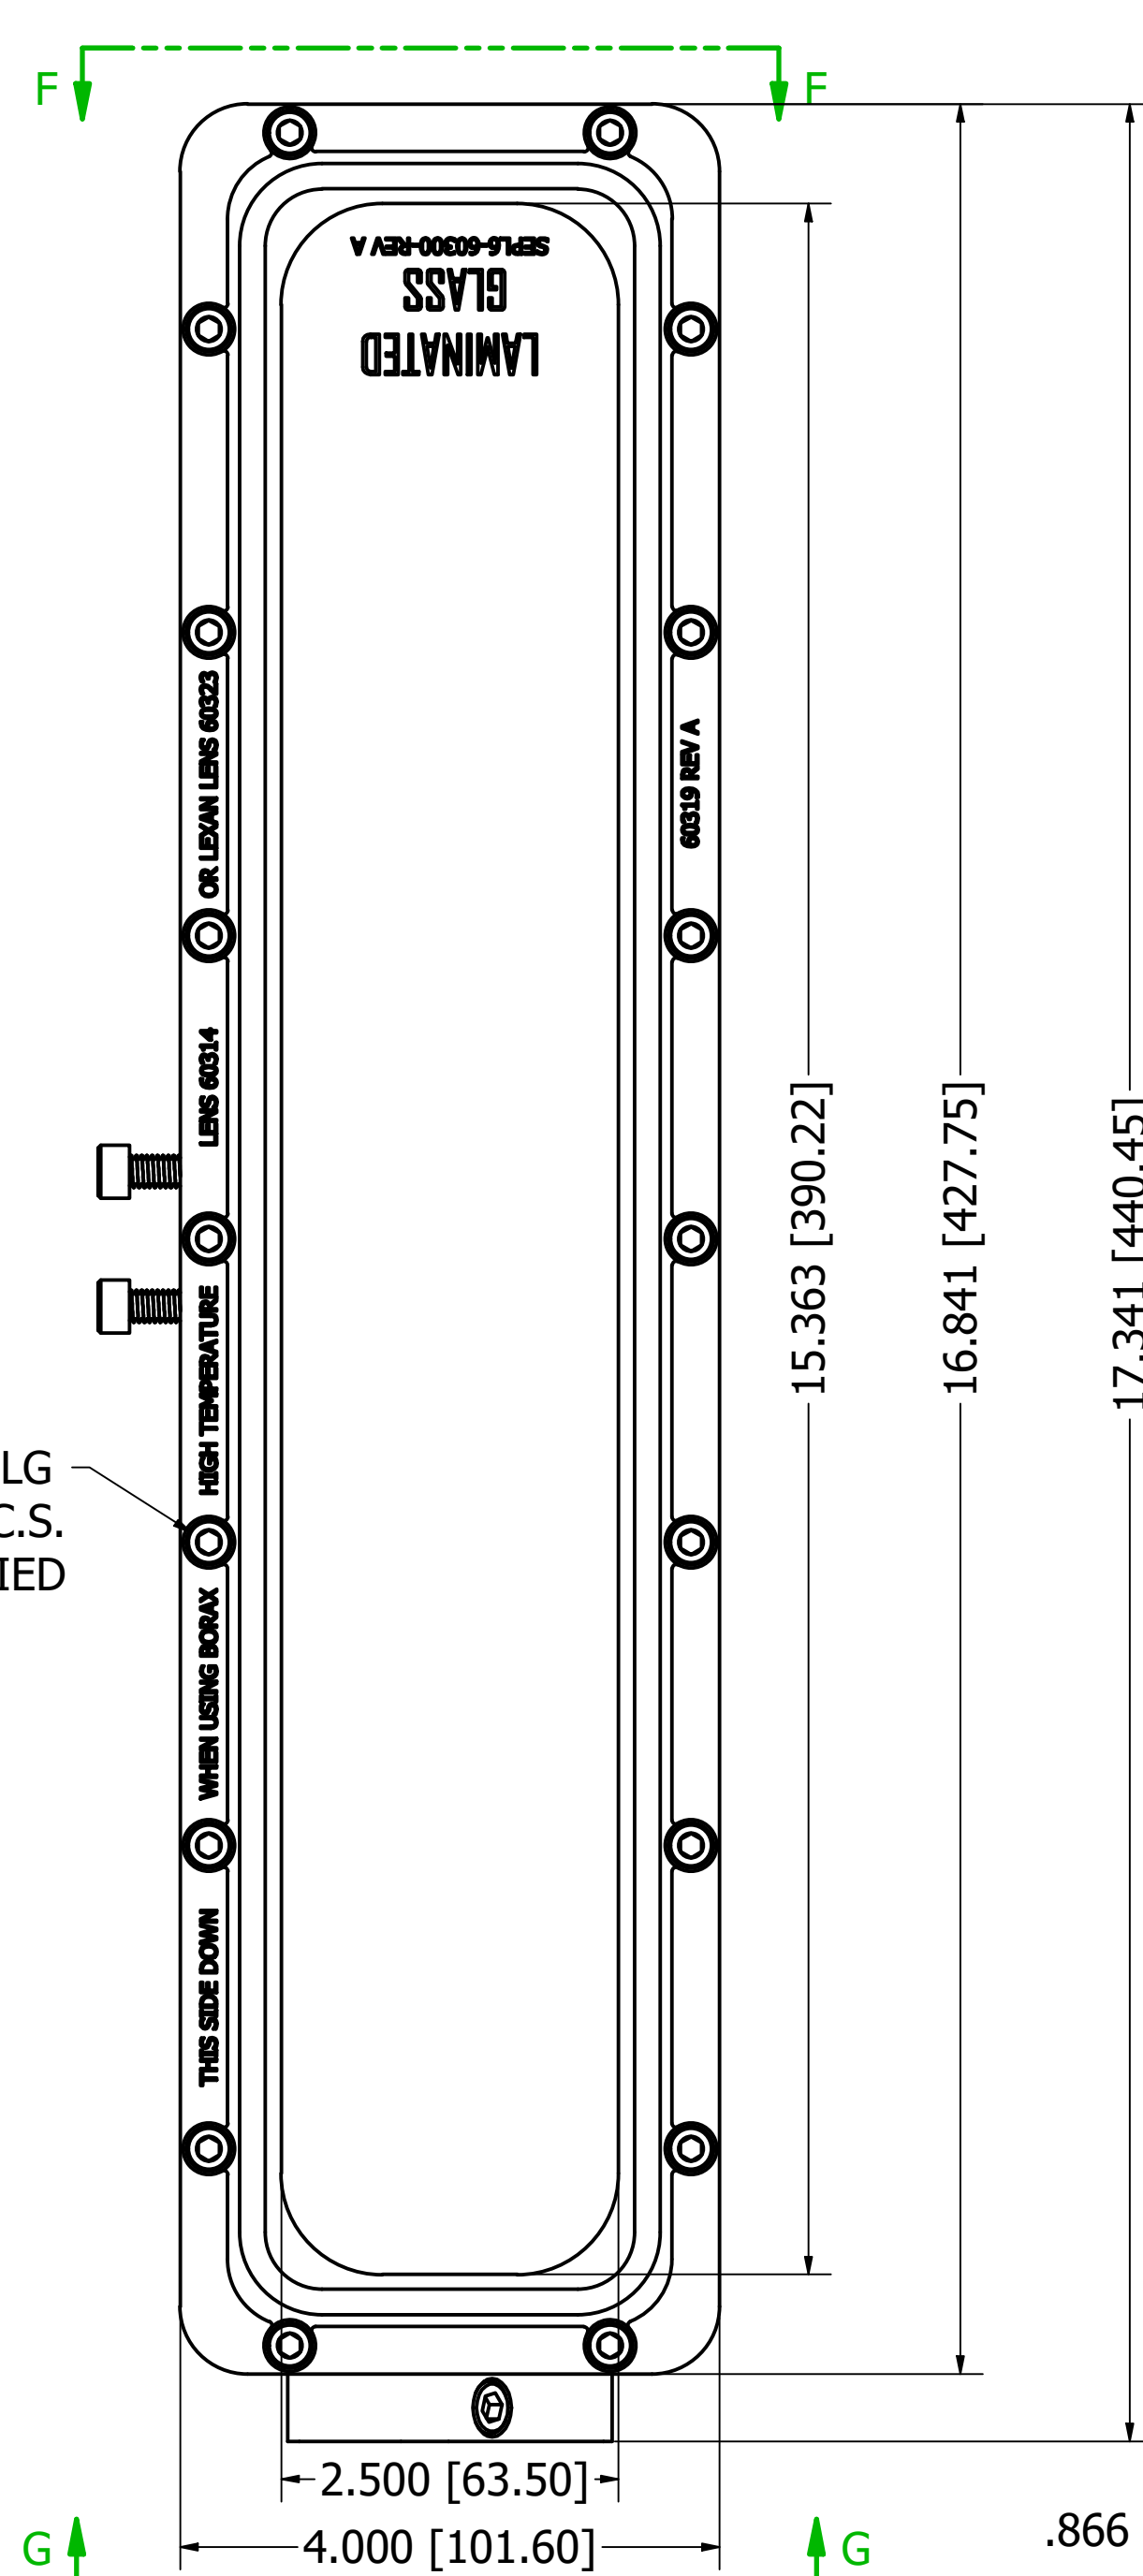

M6-1 X 25MM LG
18-8 STAINLESS STEEL S.H.C.S.
(1) SUPPLIED

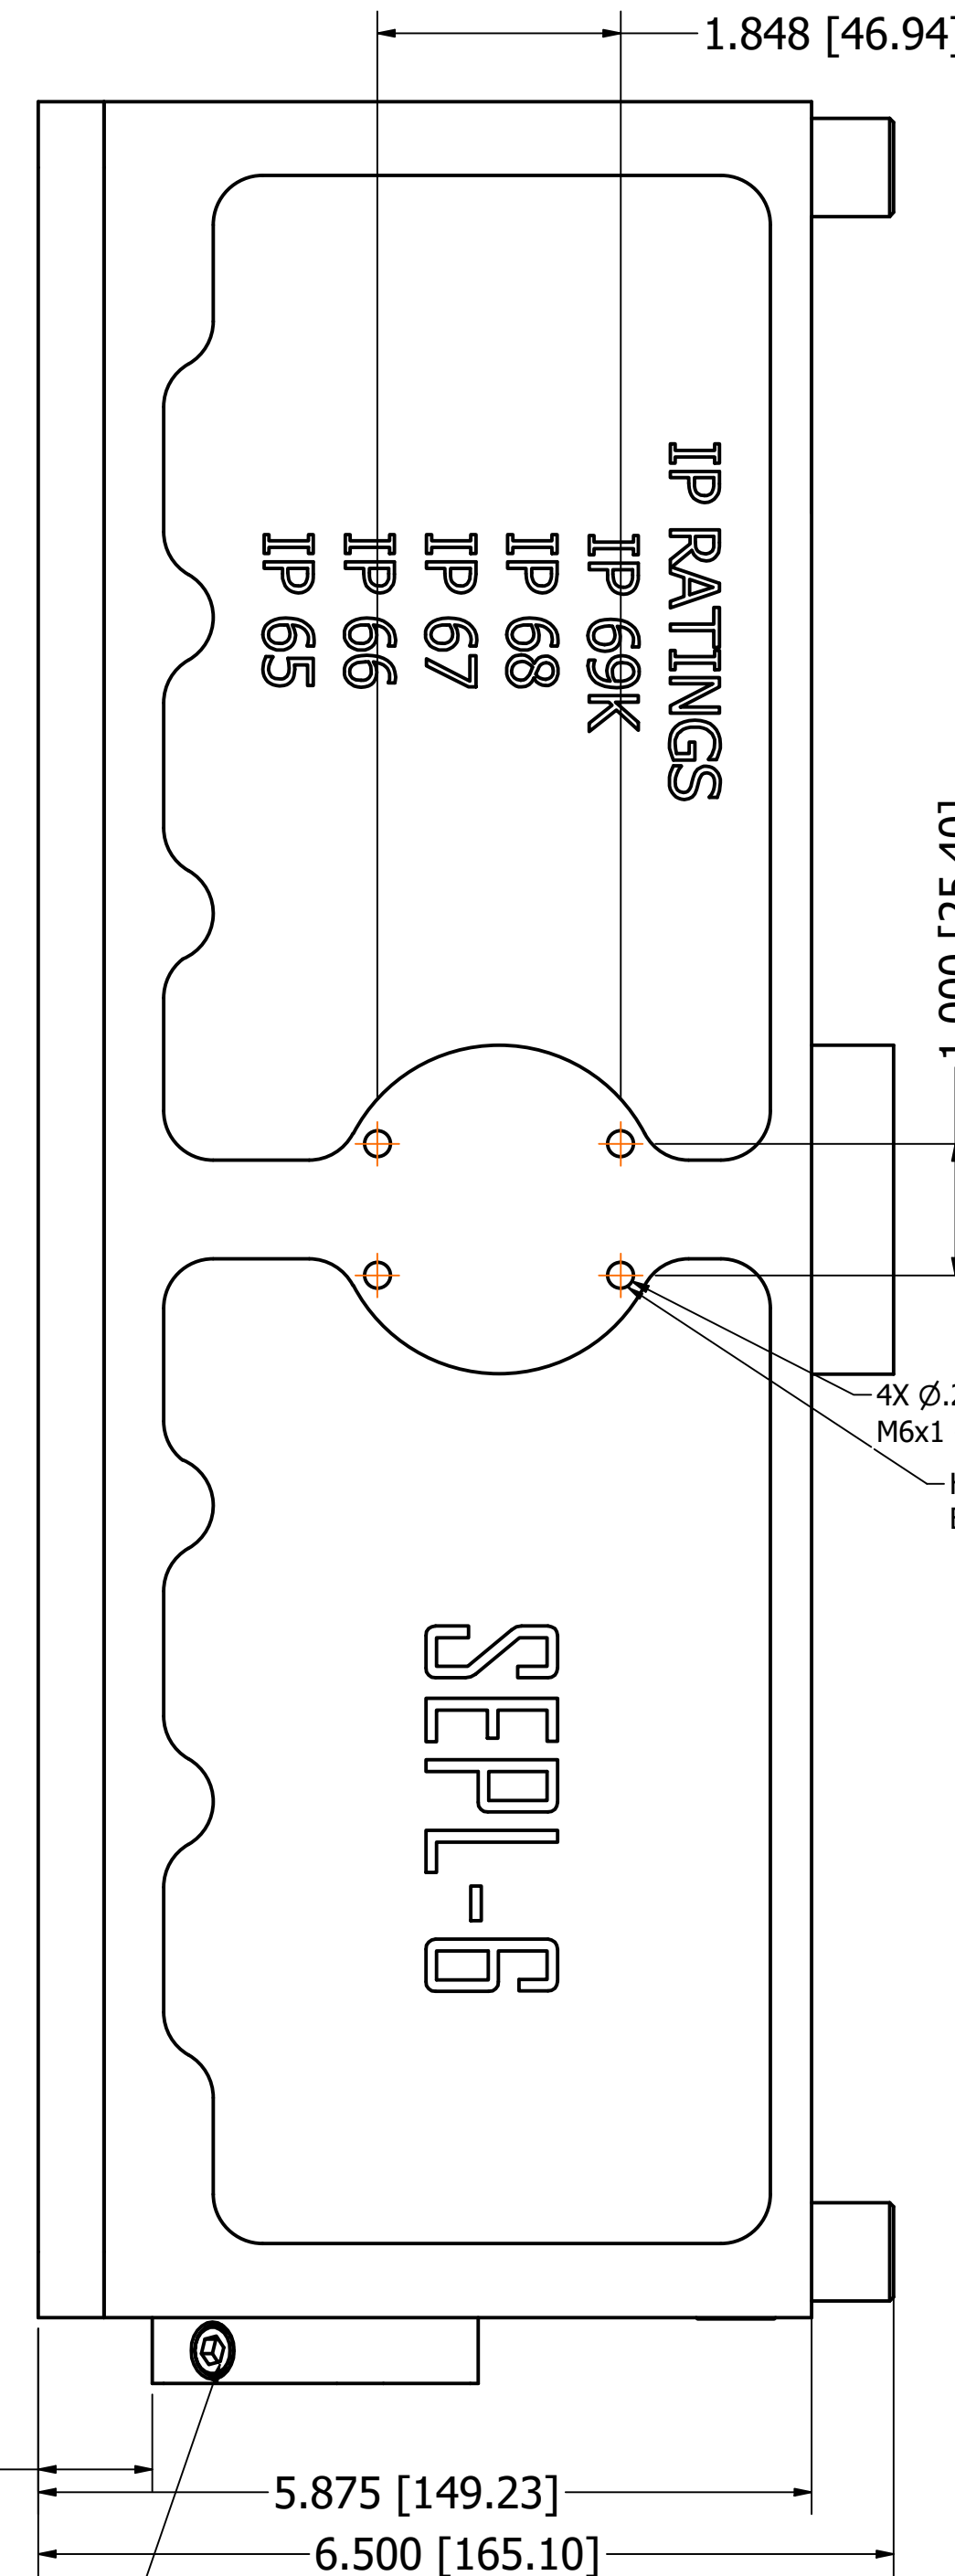


4X Ø.201 $\sqrt{.620}$
M6x1 - 6H $\sqrt{.472}$

4X Ø.201 $\sqrt{.680}$
M6x1 - 6H $\sqrt{.472}$

HD POPLINK MOUNTING PATTERN ON
BOTH SIDES, TOP, AND BOTTOM.

1.848 [46.94]

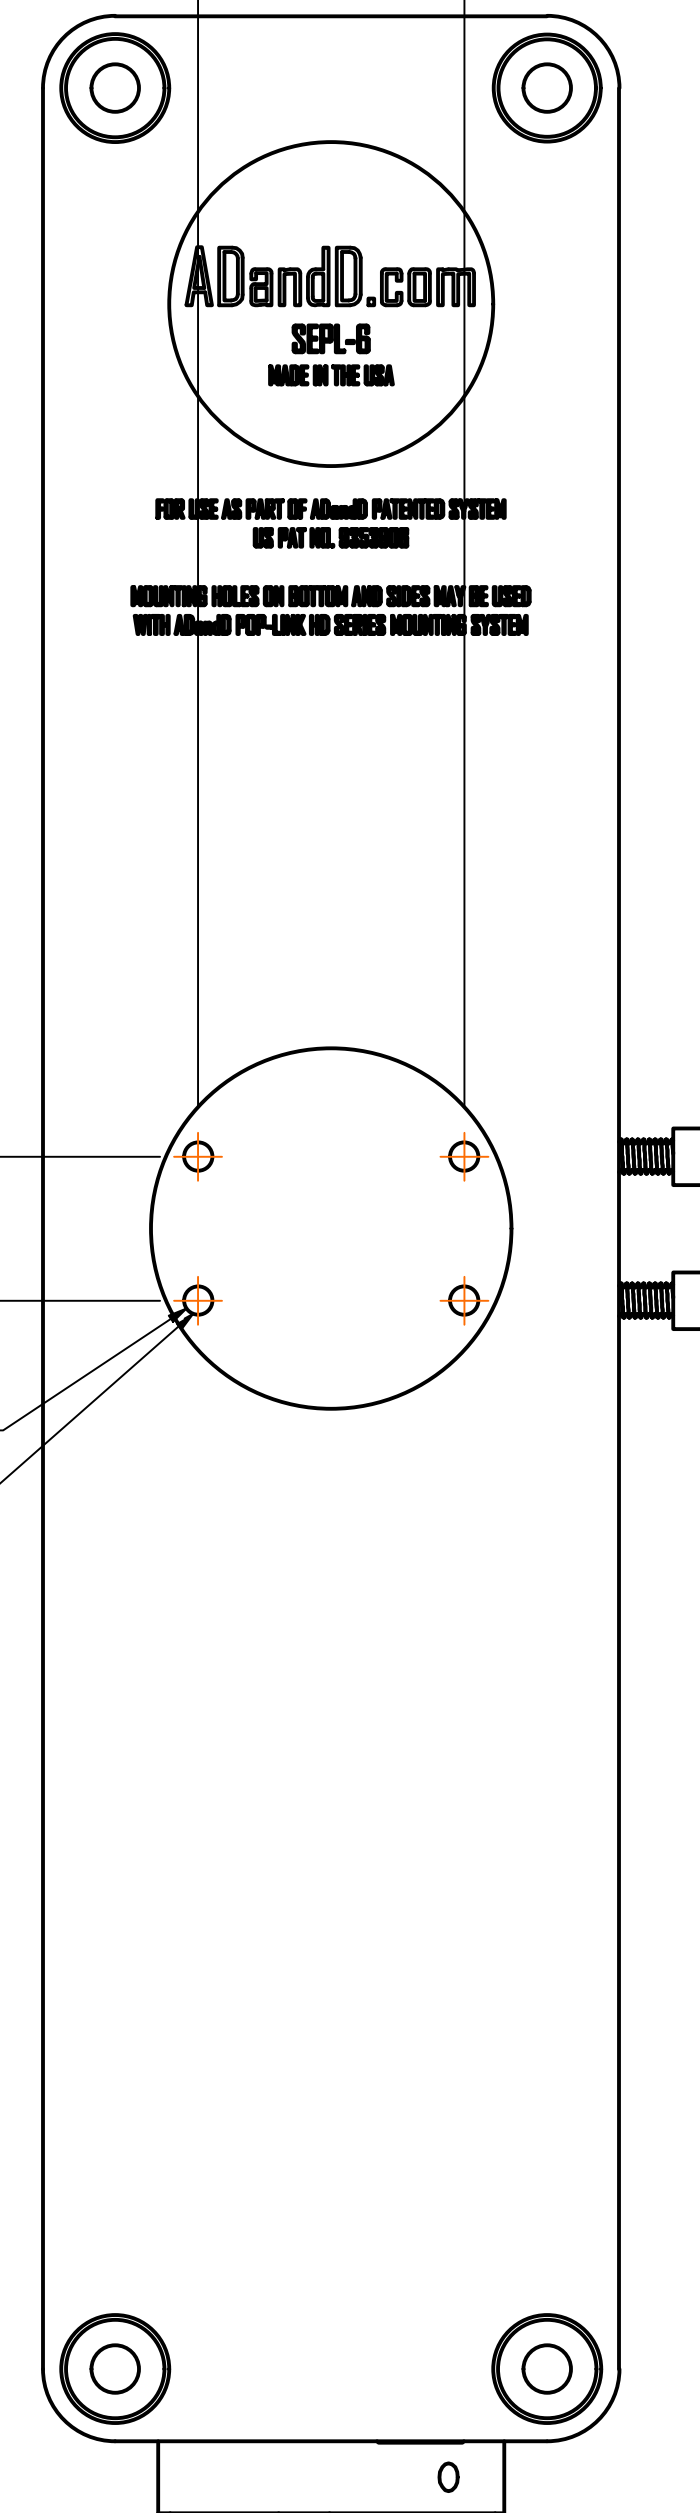


ADandD.com
SEPL-6
MADE IN THE USA

FOR USE AS PART OF ADandD PATENTED SYSTEM
USE PAT NO. 8582808
MOUNTING HOLES ON BOTTOM AND SIDES MAY BE USED
WITH ADandD POP-LINK HD SERIES MOUNTING SYSTEM

PATENT PENDING	
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS UNLESS OTHERWISE SPECIFIED	
MARK DETAILS WITH P/N, MATERIAL & HEAT TREAT SPEC UNLESS OTHERWISE SPECIFIED	
ALL WEIGHTS ARE ESTIMATED AND SHOULD NOT BE USED IN LOADING CALCULATIONS	
STANDARD TOLERANCE UNLESS OTHERWISE SPECIFIED	GEOMETRIC CHARACTERISTIC SYMBOLS PER ASME Y14.5M - 1994
2 PLACE DEC. $\pm .030$	FLATNESS
3 PLACE DEC. $\pm .005$	STRAIGHTNESS
4 PLACE DEC. $\pm .0005$	CIRCULARITY
ANGLES $\pm 1^\circ$	CYLINDRICITY
THIRD ANGLE PROJECTION	PROFILE OF A SURFACE
	PERPENDICULARITY
	PARALLELISM
	ANGULARITY
	CIRC RUNOUT
	TOTAL RUNOUT
	POSITION
	CONCENTRICITY
	DIAMETER
	AT MAX MATL. CONDITION
	REGARDLESS OF FEATURE SIZE
	AT LEAST MATL. CONDITION
	DATUM FEATURE

A	RELEASED TO PRODUCTION	3/6/2020	NCarlson
ZONE	REV	DESCRIPTION	DATE
APPROVED BY			

REVISIONS

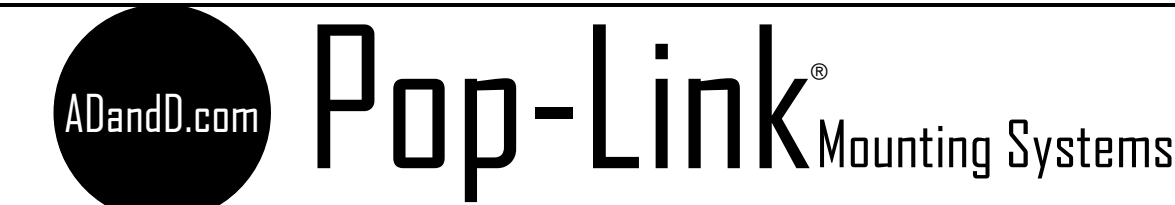

SEPL-6 ENCLOSER

MATERIAL:	DESIGNED BY: NCarlson
FINISH:	DRAWN BY: NCarlson
WT.(LBS): N/A	DRAWN DATE: 2/15/2024
SHEET. SIZE: D	SCALE: 3/4

DETAIL NO. SEPL-6

REV.
A