


# TOM WHEATLEY Swing Check Valves

Simple, field-proven design for backflow prevention in the global hydrocarbon industry

TECHNOLOGY

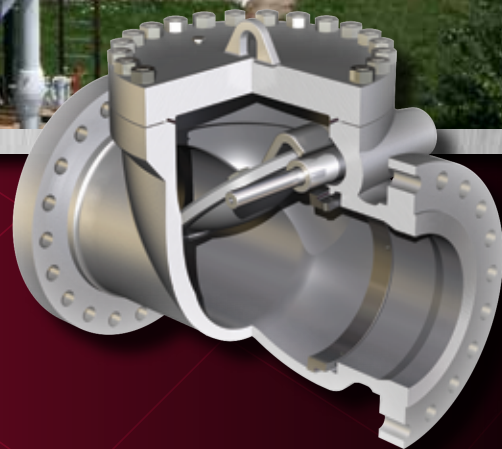

# Table of Contents

## TOM WHEATLEY SWING CHECK VALVES

|                                                            |    |
|------------------------------------------------------------|----|
| Introduction.....                                          | 1  |
| Technical Overview.....                                    | 2  |
| Applications.....                                          | 2  |
| Dimensions and Weights.....                                | 3  |
| Design Features .....                                      | 4  |
| Optional Features.....                                     | 8  |
| Special Features .....                                     | 11 |
| Available Trims.....                                       | 12 |
| <b>Dimensional Data</b>                                    |    |
| ANSI Class 150 .....                                       | 14 |
| ANSI Class 300 .....                                       | 15 |
| ANSI Class 600 .....                                       | 16 |
| ANSI Class 900 .....                                       | 17 |
| ANSI Class 1500 .....                                      | 18 |
| Flow Coefficient Data .....                                | 19 |
| Standard End Configurations .....                          | 19 |
| How to Order .....                                         | 20 |
| Quality Assurance .....                                    | 21 |
| CAMSERV Aftermarket Services for Valves and Actuation..... | 22 |



Ville Platte, La., USA

Cameron is a leading provider of valve, valve automation and measurement systems to the oil and gas industry. Our products are primarily used to control, direct and measure the flow of oil and gas as it is moved from individual wellheads through flowlines, gathering lines and transmission systems to refineries, petrochemical plants and industrial centers for processing.

Cameron provides a wide range of valves for use in natural gas, LNG, crude oil, and refined products transmission lines. The traditional CAMERON® fully welded ball valve product line has been combined with the GROVE®, RING-O®, TOM WHEATLEY®, ENTECH™, and TK® product lines. This broad offering has strengthened Cameron's ability to serve as a single source for a wide scope of customer requirements. Cameron also provides critical service valves for refinery, chemical, and petrochemical processing businesses, and for associated storage terminal applications, particularly through the ORBIT® and GENERAL VALVE® product lines. These brands are complemented by WKM®, TBV™, and TEXSTEAM™ valve products and considerably expand the scope of our product offerings.

Cameron's TOM WHEATLEY check valves have been an integral part of the surface and subsea flow control arenas for more than 70 years. With valves in service around the world, in the most critical backflow prevention applications, the TOM WHEATLEY brand is recognized as the industry leader for check valve products. From deepwater subsea check valves, designed to protect offshore platforms, to the fire-resistant valves used in surface pipeline and processing applications, we offer a complete line of swing, piston, and nozzle check products to meet our customers' most demanding applications.


## TECHNICAL OVERVIEW

- Check valves are primarily used in oil and gas pipelines to prevent backflow.
- Check valves can be utilized in surface and subsea manifold production systems, or where a pipeline requires isolation.
- Cameron's check valves are available in a wide range of materials to suit various pressures, temperatures, and service conditions.
- From extreme temperatures and pressures to subsea service, valves are available in virtually any size, pressure class, material, trim, and design configuration to handle the industry's most demanding applications.

## APPLICATIONS

Cameron's TOM WHEATLEY swing check valves are commonly used by the hydrocarbon industry to:

- Prevent backflow in pipelines
- Prevent leakage to the environment in the event of a pipeline rupture
- Protect the integrity of upstream equipment

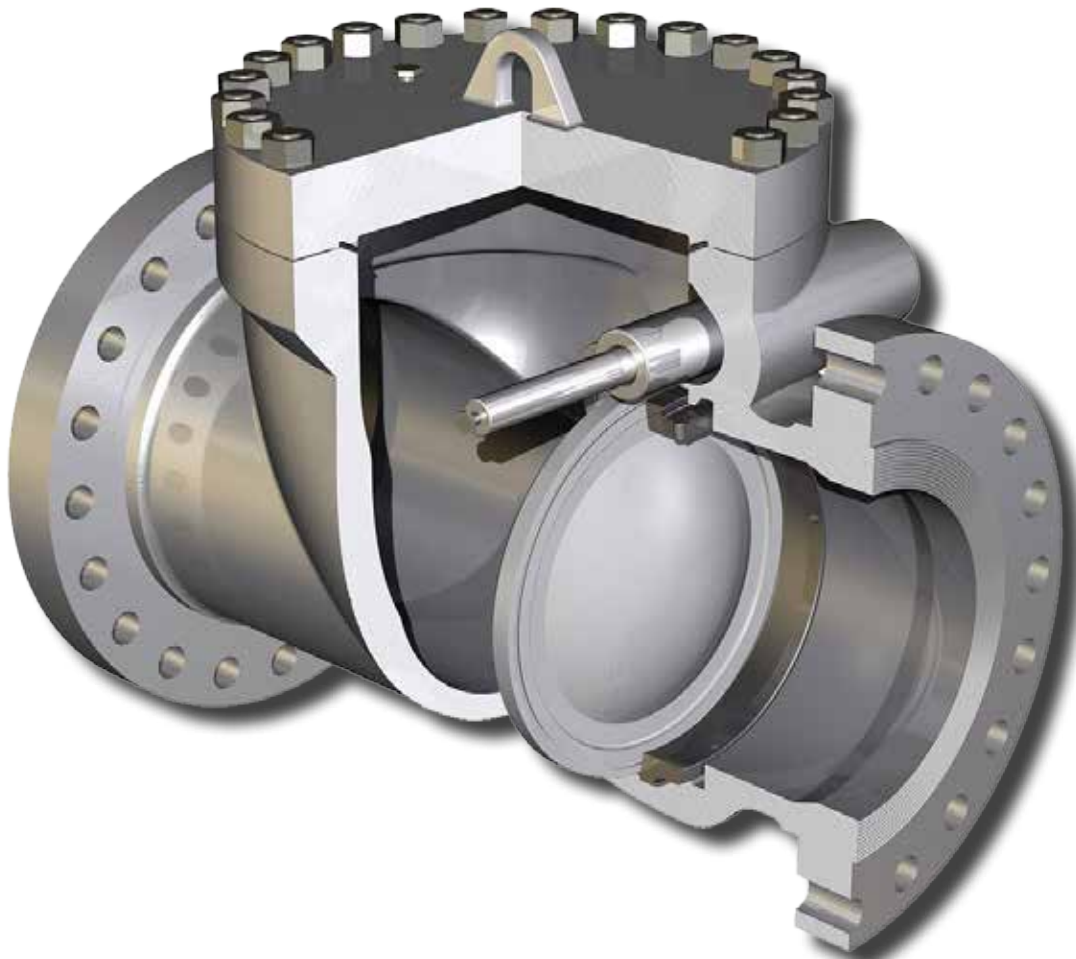

## DIMENSIONS AND WEIGHTS

### 6" to 48" (150 mm to 1200 mm)

The majority of valve sizes detailed in this section can be engineered to accept the optional features detailed in this brochure. Sizes, pressure classes, and end connections not listed are available upon request.

#### Sizes and Pressure Classes Available

| Size<br>in. (mm) | ASME Class |     |     |                                                                                     |                                                                                       |                                                                                      |
|------------------|------------|-----|-----|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|                  | 150        | 300 | 600 | 900                                                                                 | 1500                                                                                  | 2500                                                                                 |
| 6<br>(150)       | •          | •   | •   | •                                                                                   | •                                                                                     | •                                                                                    |
| 8<br>(200)       | •          | •   | •   | •                                                                                   | •                                                                                     | •                                                                                    |
| 10<br>(250)      | •          | •   | •   | •                                                                                   | •                                                                                     | •                                                                                    |
| 12<br>(300)      | •          | •   | •   | •                                                                                   | •                                                                                     | •                                                                                    |
| 14<br>(350)      | •          | •   | •   | •                                                                                   | •                                                                                     | •                                                                                    |
| 16<br>(400)      | •          | •   | •   | •                                                                                   | •                                                                                     | •                                                                                    |
| 18<br>(450)      | •          | •   | •   | •                                                                                   | •                                                                                     |  |
| 20<br>(500)      | •          | •   | •   | •                                                                                   | •                                                                                     |                                                                                      |
| 22<br>(550)      | •          | •   | •   | •                                                                                   | •                                                                                     |                                                                                      |
| 24<br>(600)      | •          | •   | •   | •                                                                                   | •                                                                                     |                                                                                      |
| 26<br>(650)      | •          | •   | •   |                                                                                     |                                                                                       |                                                                                      |
| 28<br>(700)      | •          | •   | •   | •                                                                                   | •                                                                                     |                                                                                      |
| 30<br>(750)      | •          | •   | •   | •                                                                                   | •                                                                                     |                                                                                      |
| 36<br>(900)      | •          | •   | •   | •                                                                                   |  |                                                                                      |
| 42<br>(1050)     | •          | •   | •   |  |  |                                                                                      |

 Other sizes are available upon request.



## DESIGN FEATURES

The secret to the TOM WHEATLEY swing check valve's success is simplicity. Without expensive actuation or reliance upon an outside power source, the TOM WHEATLEY swing check valve prevents backflow in a fraction of a second. The clapper is the only moving part, which swings to allow flow. At the moment flow ceases, the clapper returns to the closed position, creating an instant barrier to reverse flow.

In addition, a swing check valve is easy to troubleshoot and easy to maintain with convenient top-entry access to all valve internals.

In its standard configuration, these valves have a bolted cover and a free-swinging clapper. The clapper is the closing member that responds to the prevailing flow conditions.

### Design Standards\*

- API 6D, 1st Edition  
(February 1995, Reaffirmed September 2008)
- ISO 14313
- ANSI B16.34
- API 6D SS
- ISO 14723
- NACE MR0175
- ISO 15156


*\*Unless otherwise agreed upon with the customer, materials of construction are selected to comply with the requirements of the above standards.*

All valves are full-bore, through-conduit and will allow the passage of various pipeline inspection gauges and spheres. The full-bore design ensures a low pressure drop across the valve and less turbulence than with reduced-bore valves or alternative designs of swing check valves.

The valve ends are available to meet any pipeline requirement. The valves are supplied with raised-face, ring-type joint flanges or weld ends. Raised-face and ring-type joint flanges comply with the requirements of ASME B16.5 and ASME B16.47, as appropriate.

Flanges are backfaced to provide a smooth bolting surface to allow even bolt loading during installation in the pipeline.

Weld-end valves comply with ASME B16.25 unless otherwise agreed upon with the customer. Hub ends and other specialty end connections are available upon request.

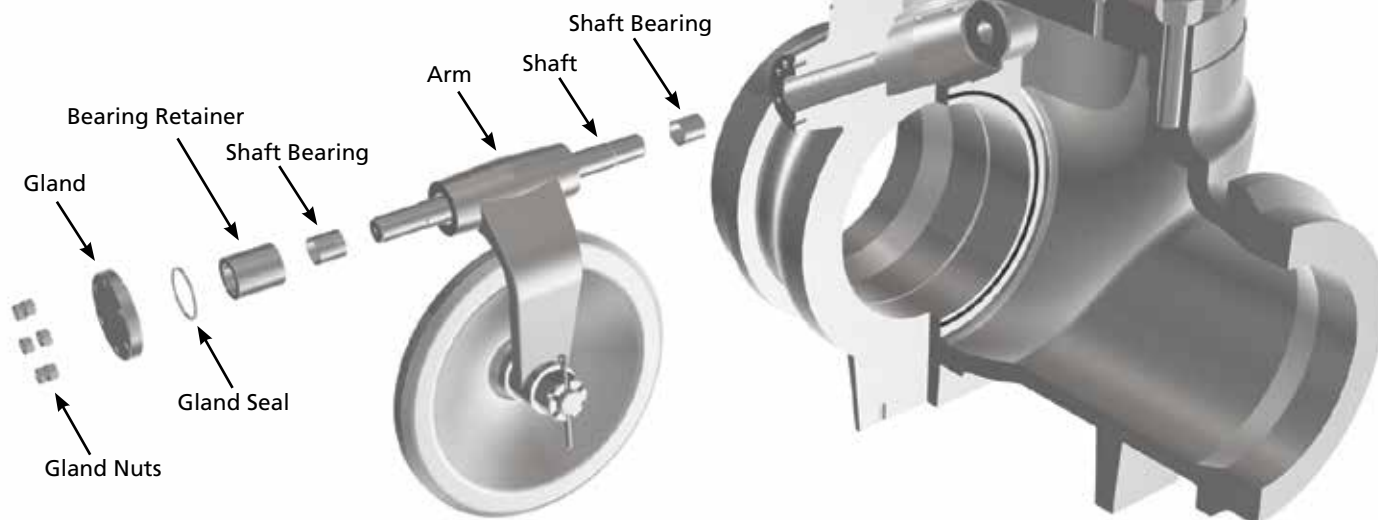


## Seat Options

TOM WHEATLEY swing check valves are available with either an integral seat or renewable seat. A renewable seat extends the life of the valve by allowing all internal parts and seals to be replaced with the valve body still installed in the pipeline.


Sealing materials are selected for the valve service conditions. Pressure, temperature, and flow media all are considered when selecting seals. Standard seal materials include Fluoroelastomer and Nitrile for the seat-to-

clapper seal. Standard cover seal materials are Fluoroelastomer and Nitrile, but ring joint gaskets also can be used for the cover-to-body seal.

TOM WHEATLEY valves are available with an extended operating shaft to allow the valve to be locked in the open position for pigging or testing purposes, or to mount a rotary damper for pulsating gas flow service.

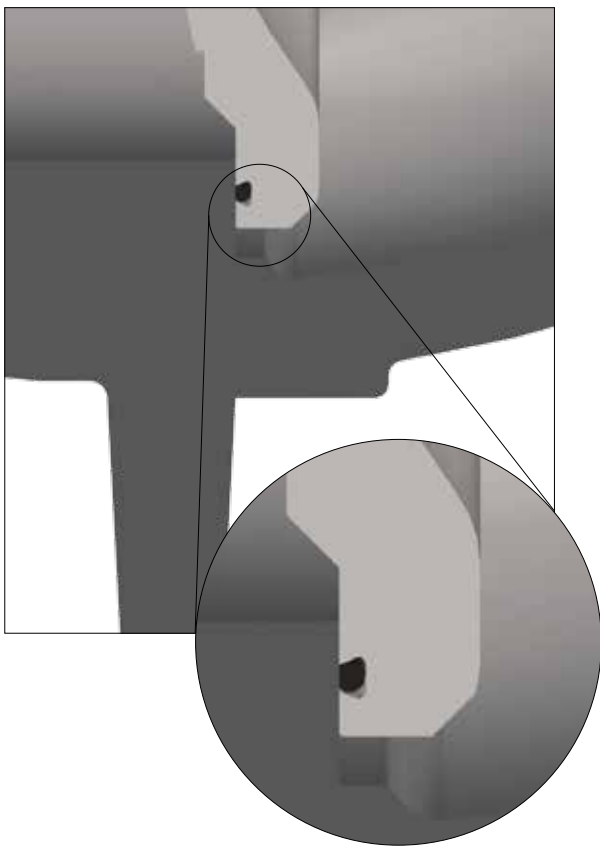

The TOM WHEATLEY swing check valve features a seat that is integral with the standard body. As an option, a renewable seat is field serviceable and facilitates the use of corrosion-resistant steels, overlays, and seat styles. Renewable seats are securely mounted inside the valve body using fasteners.

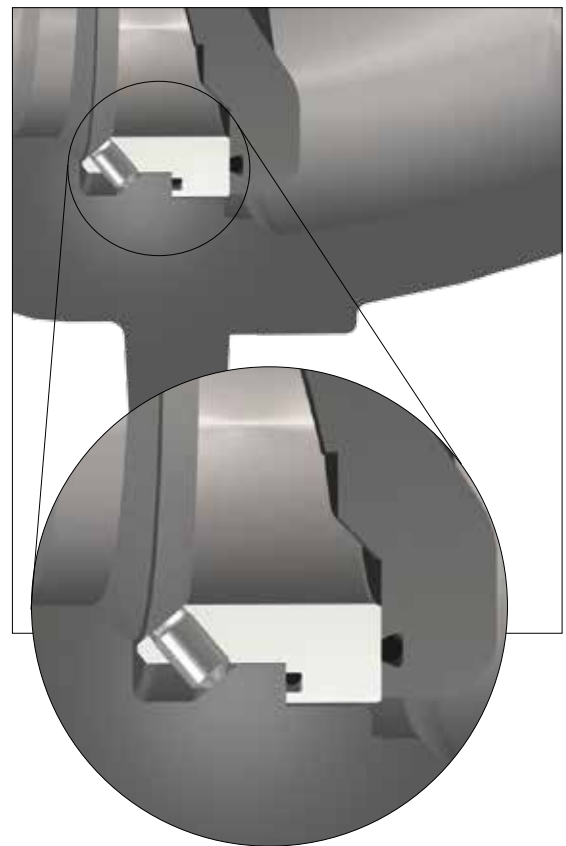

The renewable seat option allows the repair or replacement of all the seat sealing elements in the valve. By having both the seat and clapper as separate parts from the body, a damaged valve can be restored to as-new condition and performance. A renewable seat also facilitates use of different corrosion-resistant materials and modified seat designs to accommodate pipeline pigs.

## DESIGN FEATURES (CONT.)

### Clapper Construction

The clapper is a one-piece cast design that is mounted to the valve clapper arm with a secure and positively located fastener.


### 45-Degree Seat

In addition to the conduit clapper, another aid in successful pigging operations, especially in the reverse direction, is the 45-degree seat. The seat ring and clapper seat faces are profiled at a 45-degree angle to assist as pipeline pigs transition through the valve body. Changes in profile at the seat area that could potentially catch the edge of a pig and damage instruments are reduced.

### Conduit Clapper

The TOM WHEATLEY check valve is designed to facilitate pigging operations and to protect instrumentation on intelligent pigs. A conduit clapper profile that closely matches the valve bore helps to guide the pig through the body of the valve and into the downstream pipe.

The TOM WHEATLEY swing check valve clapper has been designed using the latest finite element analysis (FEA) and computational flow dynamics (CFD) techniques to create a sealing barrier that is strong, while at the same time allows increased flow with reduced pressure drop through the valve. As a standard, the clapper contains an elastomer seal to create a zero-leakage seal against the seat. Polymer seals are optional. The clapper face also can be overlaid with corrosion-resistant alloys or hard facing for metal-to-metal sealing applications and corrosion resistance.

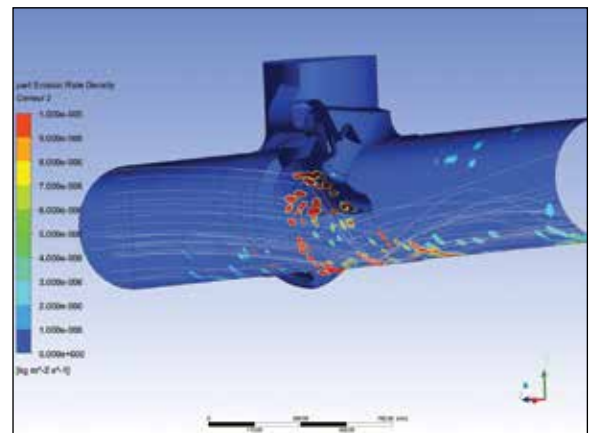




## Glands and Seals

The standard gland is a bolted-on shaft cover with an elastomer seal. The gland bolting pattern is standardized for all gland types to allow multiple gland and shaft seal configurations without machining the body. Polymer seals are optional.



## Bearings for Shaft

Stainless steel bearings backed with PTFE are located on both ends of the valve shaft to support the arm and clapper for smooth, low-friction movement of the clapper.

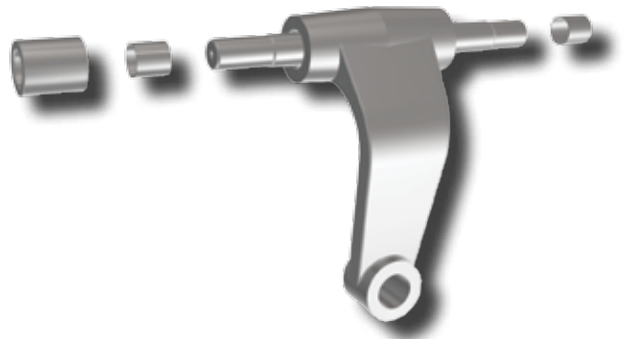

## Cover Seals

An elastomer seal is the standard seal. Metal seals are optional and available in various materials options. The cover and bolting patterns are standard, regardless of the type of cover seal.

## Body Bolting


As a standard, all bolting meets ASME B16.34 and ASME VIII Div. 1 design requirements.

## OPTIONAL FEATURES

### Gland Designs


#### S1 Gland

The S1 gland is the standard gland for extended shaft configurations. It features a bolted-on gland body with two elastomer shaft seals and an elastomer body seal. Lubricant or sealant injection is standard between the primary and secondary shaft seals.

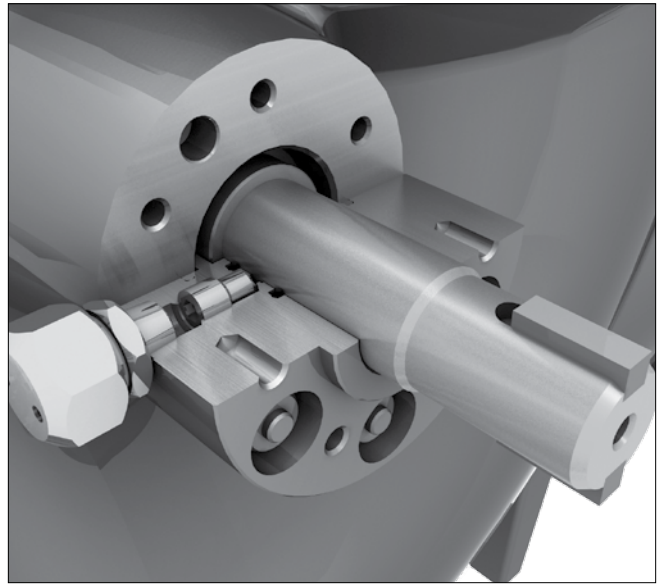


#### S2 Gland

The S2 gland is an optional gland for extended shaft applications. It features two spring-energized lipseals for shaft seals and an elastomer body seal. Lubricant or sealant injection also is a standard feature on this gland. For 6" to 16" (152 mm to 406 mm) valves, the secondary lipseal is retained by a threaded gland retainer. For valves 20" (508 mm) and larger, the secondary lipseal is retained by the gland flange. In both cases, the secondary lipseal is field replaceable.

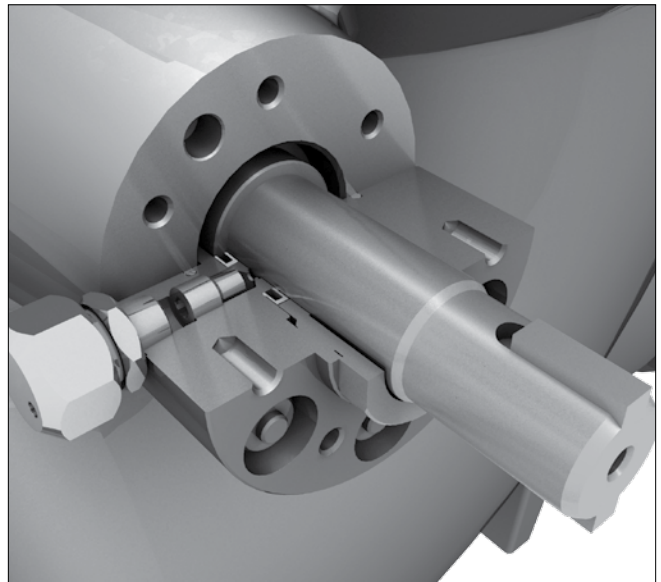


### Subsea T1 Gland

The T1 gland is used for subsea service, and features spring-energized polymer lipseals for the dynamic shaft seals and double-barrier elastomer seals for the gland body seals. The gland contains an outward-facing lipseal that prevents ingress of seawater into the valve. The gland flange seals against the gland body and the gear operator to prevent seawater ingress. In the event of shaft seal leakage, the gear operator is protected from internal pressure by means of a pressure-relief fitting installed in the gland flange.

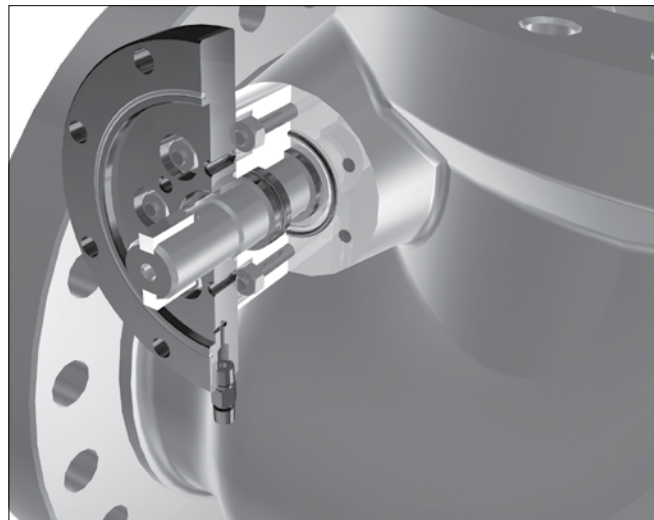

### Shaft Cover

An optional shaft cover is available that can bolt directly onto the extended shaft gland or flange to protect the shaft when it is not in use. The shaft cover is designed to contain the valve's full-rated working pressure and to prevent leaks into the environment.

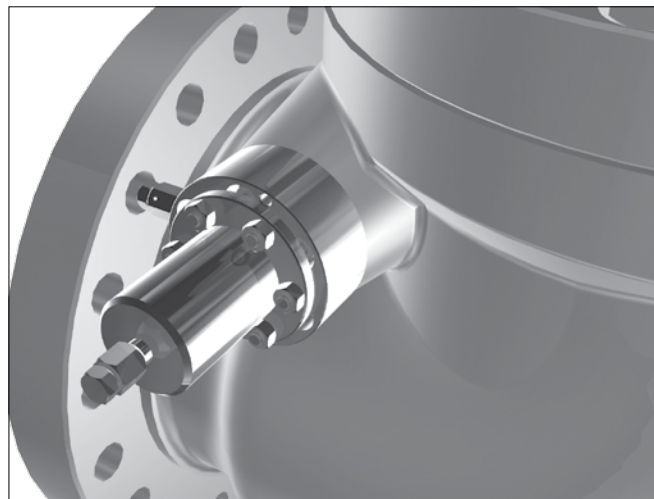

## OPTIONAL FEATURES (CONT.)

### Lock-Open Device

The lock-open device allows easy opening of the check valve clapper and locks the clapper in the full-open position. The lock-open device is intended for applications requiring the override of the normal check valve function. These applications can include locking open for testing, line drainage, reverse pigging, or other reverse flow conditions. Valves 16" (400 mm) Class 900 and smaller can be locked open using a manual lever or a gear operator. Larger valves are supplied with a gear operator to lock open the valve as a standard. In either configuration, the lock-open device will hold the valve in the open position for operating scenarios. The lock-open feature requires that the valve has an extended shaft. The shaft seal gland can be either an S1 gland with elastomer seals or an S2 gland with lipseals.

Use of the lock-open device requires equalized pressure (balanced pressure) across the closed clapper. Excess force applied to open the valve against differential pressure can damage the internal components of the valve.

A valve shaft cover is furnished with the valve for installation when the lock-open device is not in use.



### Rotary Retarder (Mini-Slam)

The TOM WHEATLEY swing check valve can be furnished with a Mini-Slam II rotary dampener that is specifically designed for swing check valves. The dampener acts to reduce the movement of the clapper in pulsating flow service (for example, when installed directly downstream from a reciprocating compressor).

The Mini-Slam II is a self-contained and compact unit that bolts directly to the valve shaft.



## SPECIAL FEATURES

### Testing

TOM WHEATLEY swing check valves are manufactured and tested per API 6D/ISO 14313 standards. Every valve receives a hydrostatic body shell test at 1.5 times its rated working pressure and a hydrostatic seat test at 1.1 times its rated working pressure. Additional pressure testing is available, including air and nitrogen testing.

### High Pressure Gas

TOM WHEATLEY swing check valves can be tested using high-pressure gas upon request. Cameron is fully equipped to carry out supplemental gas testing at ambient, low- or high-temperatures using our in-house testing facilities. External leakage rates, if any, are detected by a mass spectrometer. Leakage through the seats, if any, is measured by calibrated flow meters. For low- or high-temperature service, gas testing can be performed to customer-specified critical conditions. Cameron facilities are capable of testing a wide range of valve sizes and pressure classes.

### Qualification Testing

TOM WHEATLEY swing check valves are qualified to a Cameron-specific test program, including fire testing to API 6FD 1st Edition (February 1995, Reaffirmed September 2008).

### Materials – NACE Requirements

TOM WHEATLEY swing check valves are built to comply with NACE MR0175/ISO 15156 standards.





## AVAILABLE TRIMS

Standard trims are shown below, however, higher materials and overlays are available to suit a variety of service.

|                                                   | Trim One                                               | Trim Two                                               | Trim Three                                                                 | Trim Four                                                                  | Trim Five                                                                      | Trim Six                                                                       |
|---------------------------------------------------|--------------------------------------------------------|--------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
|                                                   | Non-Corrosive/<br>Standard Temp.                       | Non-Corrosive/<br>Cold Temp.                           | Mildly Corrosive/<br>Standard Temp.                                        | Mildly Corrosive/<br>Low Temp.                                             | Moderately<br>Corrosive/Standard<br>Temp.                                      | Moderately<br>Corrosive/Low<br>Temp.                                           |
|                                                   | Carbon Steel<br>-20° F to 350° F<br>(-29° C to 212° C) | Carbon Steel<br>-50° F to 350° F<br>(-46° C to 212° C) | CS with Overlay<br>of CLPR, Seat<br>-20° F to 350° F<br>(-29° C to 212° C) | CS with Overlay<br>of CLPR, Seat<br>-50° F to 350° F<br>(-46° C to 212° C) | CS with Overlay<br>of all Seal Areas<br>-20° F to 350° F<br>(-29° C to 212° C) | CS with Overlay<br>of all Seal Areas<br>-50° F to 350° F<br>(-46° C to 212° C) |
| Body                                              | ASTM A216 WCC                                          | ASTM A352 LCC                                          | ASTM A216 WCC                                                              | ASTM A352 LCC                                                              | ASTM A216 WCC/316<br>O/L                                                       | ASTM A352 LCC/316<br>O/L                                                       |
| Cover                                             | ASTM A36                                               | ASTM A350 LF2                                          | ASTM A36                                                                   | ASTM A350 LF2                                                              | ASTM A36/316 O/L                                                               | ASTM A350 LF2/316 O/L                                                          |
| Clapper                                           | ASTM A216 WCC                                          | ASTM A352 LCC                                          | ASTM A216 WCC/316<br>O/L                                                   | ASTM A352 LCC/316 O/L                                                      | ASTM A216 WCC/316<br>O/L                                                       | ASTM A352 LCC/316<br>O/L                                                       |
| Arm                                               | ASTM A216 WCC                                          | ASTM A352 LCC                                          | ASTM A216 WCC                                                              | ASTM A352 LCC                                                              | ASTM A216 WCC                                                                  | ASTM A352 LCC                                                                  |
| Seat (See Note 1)                                 | ASTM A36                                               | ASTM A516 GR 70                                        | ASTM A36/316 O/L                                                           | ASTM A516 GR 70/316<br>O/L                                                 | ASTM A36/316 O/L                                                               | ASTM A516 GR 70/316<br>O/L                                                     |
| Shaft, Standard<br>Non-Extended                   | 316 SS                                                 | 316 SS                                                 | 316 SS                                                                     | 316 SS                                                                     | 316 SS                                                                         | 316 SS                                                                         |
| Shaft, Extended                                   | ASTM A564 Type 630<br>(17-4 pH)                        | ASTM A564 Type 630<br>(17-4 pH)                        | ASTM A564 Type 630<br>(17-4 pH)                                            | ASTM A564 Type 630<br>(17-4 pH)                                            | ASTM A564 Type 630<br>(17-4 pH)                                                | ASTM A564 Type 630<br>(17-4 pH)                                                |
| Gland, Standard                                   | ASTM A350 LF2                                          | ASTM A350 LF2                                          | ASTM A350 LF2                                                              | ASTM A350 LF2                                                              | ASTM A350 LF2/316<br>O/L                                                       | ASTM A350 LF2/316 O/L                                                          |
| Gland, S1                                         | ASTM A350 LF2                                          | ASTM A350 LF2                                          | ASTM A350 LF2                                                              | ASTM A350 LF2                                                              | 316 SS                                                                         | 316 SS                                                                         |
| Gland, T1                                         | 316 SS                                                 | 316 SS                                                 | 316 SS                                                                     | 316 SS                                                                     | 316 SS                                                                         | 316 SS                                                                         |
| Gland, S2                                         | ASTM A350 LF2                                          | ASTM A350 LF2                                          | ASTM A350 LF2                                                              | ASTM A350 LF2                                                              | 316 SS                                                                         | 316 SS                                                                         |
| Gland Flange                                      | ASTM A516 GR 70                                        | ASTM A516 GR 70                                        | ASTM A516 GR 70                                                            | ASTM A516 GR 70                                                            | ASTM A516 GR 70/316<br>O/L                                                     | ASTM A516 GR 70/316<br>O/L                                                     |
| Gland Flange, Subsea                              | ASTM A516 GR 70                                        | ASTM A516 GR 70                                        | ASTM A516 GR 70                                                            | ASTM A516 GR 70                                                            | ASTM A516 GR 70/316<br>O/L                                                     | ASTM A516 GR 70/316<br>O/L                                                     |
| Gland Retainer<br>(6" to 16" only)                | 316 SS/FLRCTD                                          | 316 SS/FLRCTD                                          | 316 SS/FLRCTD                                                              | 316 SS/FLRCTD                                                              | 316 SS/FLRCTD                                                                  | 316 SS/FLRCTD                                                                  |
| Lift Collar                                       | ASTM A564 Type 630<br>(17-4 pH)                        | ASTM A564 Type 630<br>(17-4 pH)                        | ASTM A564 Type 630<br>(17-4 pH)                                            | ASTM A564 Type 630<br>(17-4 pH)                                            | ASTM A564 Type 630<br>(17-4 pH)                                                | ASTM A564 Type 630<br>(17-4 pH)                                                |
| Bearing Retainer                                  | AISI 4130                                              | ASTM A350 LF2                                          | AISI 4130                                                                  | ASTM A350 LF2                                                              | AISI 4130                                                                      | ASTM A350 LF2                                                                  |
| Gland Cover                                       | ASTM A350 LF2                                          | ASTM A350 LF2                                          | ASTM A350 LF2                                                              | ASTM A350 LF2                                                              | ASTM A350 LF2                                                                  | ASTM A350 LF2                                                                  |
| Gland Cover, Subsea                               | ASTM A350 LF2                                          | ASTM A350 LF2                                          | ASTM A350 LF2                                                              | ASTM A350 LF2                                                              | ASTM A350 LF2                                                                  | ASTM A350 LF2                                                                  |
| Metal Cover Seals<br>(BX, R-TYPE)<br>(See Note 2) | SICP                                                   | SICP                                                   | 316 SS FLRCTD                                                              | 316 SS FLRCTD                                                              | 316 SS FLRCTD                                                                  | 316 SS FLRCTD                                                                  |
| Bearings                                          | 316 SS/PTFE                                            | 316 SS/PTFE                                            | 316 SS/PTFE                                                                | 316 SS/PTFE                                                                | 316 SS/PTFE                                                                    | 316 SS/PTFE                                                                    |
| Thrust Washers                                    | 316 SS/PTFE                                            | 316 SS/PTFE                                            | 316 SS/PTFE                                                                | 316 SS/PTFE                                                                | 316 SS/PTFE                                                                    | 316 SS/PTFE                                                                    |
| Lip Seals – Shaft,<br>Standard                    | PTFE/ELGILOY                                           | PTFE/ELGILOY                                           | PTFE/ELGILOY                                                               | PTFE/ELGILOY                                                               | PTFE/ELGILOY                                                                   | PTFE/ELGILOY                                                                   |
| Lip Seals – Shaft, Subsea                         | PTFE/ELGILOY                                           | PTFE/ELGILOY                                           | PTFE/ELGILOY                                                               | PTFE/ELGILOY                                                               | PTFE/ELGILOY                                                                   | PTFE/ELGILOY                                                                   |
| Cover and Gland Bolting                           | B7/2H                                                  | L7/7                                                   | B7/2H                                                                      | L7/7                                                                       | B7/2H                                                                          | L7/7                                                                           |
| Clapper Nut                                       | 2HM                                                    | L7M                                                    | 2HM                                                                        | L7M                                                                        | 2HM                                                                            | L7M                                                                            |
| Clapper Cotter PIN                                | 300 Series SS                                          | 300 Series SS                                          | 300 Series SS                                                              | 300 Series SS                                                              | 300 Series SS                                                                  | 300 Series SS                                                                  |
| Clapper Anti-Rotation<br>PIN                      | High-Strength<br>Alloy Steel                           | High-Strength<br>Alloy Steel                           | High-Strength<br>Alloy Steel                                               | High-Strength<br>Alloy Steel                                               | High-Strength<br>Alloy Steel                                                   | High-Strength<br>Alloy Steel                                                   |
| Gland Torque PIN                                  | High-Strength<br>Alloy Steel                           | High-Strength<br>Alloy Steel                           | High-Strength<br>Alloy Steel                                               | High-Strength<br>Alloy Steel                                               | High-Strength<br>Alloy Steel                                                   | High-Strength<br>Alloy Steel                                                   |
| Cover Pipe Plug                                   | ASTM A350 LF2                                          | ASTM A350 LF2                                          | ASTM A350 LF2                                                              | ASTM A350 LF2                                                              | ASTM A350 LF2                                                                  | ASTM A350 LF2                                                                  |
| Gland Grease Fitting                              | 316 SS                                                 | 316 SS                                                 | 316 SS                                                                     | 316 SS                                                                     | 316 SS                                                                         | 316 SS                                                                         |
| Gland Check Fitting                               | 316 SS                                                 | 316 SS                                                 | 316 SS                                                                     | 316 SS                                                                     | 316 SS                                                                         | 316 SS                                                                         |
| Gland Flange<br>Relief Fitting                    | 316 SS                                                 | 316 SS                                                 | 316 SS                                                                     | 316 SS                                                                     | 316 SS                                                                         | 316 SS                                                                         |
| Keys                                              | 316 SS                                                 | 316 SS                                                 | 316 SS                                                                     | 316 SS                                                                     | 316 SS                                                                         | 316 SS                                                                         |


**Note:**

1. All seats size 16" (400 mm) and smaller are A516 GR 70 only.
2. Standard cover seal is an O-ring. Metal cover seal is optional. All Class 1500 valves have a metal cover seal only.

|                                             | Trim Seven                   | Trim Eight                          | Trim Nine                           | Trim Ten                               | Trim Eleven                            | Trim Twelve                         |
|---------------------------------------------|------------------------------|-------------------------------------|-------------------------------------|----------------------------------------|----------------------------------------|-------------------------------------|
|                                             | Subsea                       | Moderately Corrosive/Standard Temp. | Moderately Corrosive/Low Temp.      | Corrosive/Standard Temp.               | Corrosive/Low Temp.                    | Very Corrosive                      |
|                                             | Shallow Water                | Stainless Steel CLPR, Seat          | Stainless Steel CLPR, Seat          | SS CLPR, Seat and O/L of CS Seal Areas | SS CLPR, Seat and O/L of CS Seal Areas | All Stainless Steel                 |
|                                             | Gulf of Mexico               | -20° F to 350° F (-29° C to 212° C) | -50° F to 350° F (-46° C to 212° C) | -20° F to 350° F (-29° C to 212° C)    | -50° F to 350° F (-46° C to 212° C)    | -50° F to 350° F (-46° C to 212° C) |
| Body                                        | ASTM A216 WCC                | ASTM A216 WCC                       | ASTM A352 LCC                       | ASTM A216 WCC/316 O/L                  | ASTM A352 LCC/316 O/L                  | ASTM A351 CF8M Modified             |
| Cover                                       | ASTM A36                     | ASTM A36                            | ASTM A350 LF2                       | ASTM A36/316 O/L                       | ASTM A350 LF2/316 O/L                  | F316 SS Modified                    |
| Clapper                                     | ASTM A216 WCC/316 O/L        | ASTM A351 CF8M Modified             | ASTM A351 CF8M Modified             | ASTM A351 CF8M Modified                | ASTM A351 CF8M Modified                | ASTM A351 CF8M Modified             |
| Arm                                         | ASTM A216 WCC                | ASTM A216 WCC                       | ASTM A352 LCC                       | ASTM A216 WCC                          | ASTM A352 LCC                          | ASTM A351 CF8M Modified             |
| Seat (See Note 1)                           | ASTM A36/316 O/L             | 316 SS                              | 316 SS                              | 316 SS                                 | 316 SS                                 | 316 SS                              |
| Shaft, Standard Non-Extended                | 316 SS                       | 316 SS                              | 316 SS                              | 316 SS                                 | 316 SS                                 | 316 SS                              |
| Shaft, Extended                             | ASTM A564 Type 630 (17-4 pH) | ASTM A564 Type 630 (17-4 pH)        | ASTM A564 Type 630 (17-4 pH)        | ASTM A564 Type 630 (17-4 pH)           | ASTM A564 Type 630 (17-4 pH)           | ASTM A564 Type 630 (17-4 pH)        |
| Gland, Standard                             | N/A                          | ASTM A350 LF2                       | ASTM A350 LF2                       | ASTM A350 LF2/316 O/L                  | ASTM A350 LF2/316 O/L                  | Duplex                              |
| Gland, S1                                   | N/A                          | ASTM A350 LF2                       | ASTM A350 LF2                       | 316 SS                                 | 316 SS                                 | 316 SS                              |
| Gland, T1                                   | 316 SS                       | 316 SS                              | 316 SS                              | 316 SS                                 | 316 SS                                 | 316 SS                              |
| Gland, S2                                   | N/A                          | ASTM A350 LF2                       | ASTM A350 LF2                       | 316 SS                                 | 316 SS                                 | 316 SS                              |
| Gland Flange                                | ASTM A516 GR 70              | ASTM A516 GR 70                     | ASTM A516 GR 70                     | ASTM A516 GR 70/316 O/L                | ASTM A516 GR 70/316 O/L                | 316 SS/Duplex                       |
| Gland Flange, Subsea                        | ASTM A516 GR 70              | ASTM A516 GR 70                     | ASTM A516 GR 70                     | ASTM A516 GR 70/316 O/L                | ASTM A516 GR 70/316 O/L                | 316 SS/Duplex                       |
| Gland Retainer (6" to 16" only)             | 316 SS/FLRCTD                | 316 SS/FLRCTD                       | 316 SS/FLRCTD                       | 316 SS/FLRCTD                          | 316 SS/FLRCTD                          | 316 SS/FLRCTD                       |
| Lift Collar                                 | ASTM A564 Type 630 (17-4 pH) | ASTM A564 Type 630 (17-4 pH)        | ASTM A564 Type 630 (17-4 pH)        | ASTM A564 Type 630 (17-4 pH)           | ASTM A564 Type 630 (17-4 pH)           | ASTM A564 Type 630 (17-4 pH)        |
| Bearing Retainer                            | AISI 4130                    | AISI 4130                           | ASTM A350 LF2                       | AISI 4130                              | ASTM A350 LF2                          | 316 SS/Duplex                       |
| Gland Cover                                 | N/A                          | ASTM A350 LF2                       | ASTM A350 LF2                       | ASTM A350 LF2                          | ASTM A350 LF2                          | Duplex                              |
| Gland Cover, Subsea                         | ASTM A350 LF2                | ASTM A350 LF2                       | ASTM A350 LF2                       | ASTM A350 LF2                          | ASTM A350 LF2                          | Duplex                              |
| Metal Cover Seals (BX, R-TYPE) (See Note 2) | 316 SS FLRCTD                | 316 SS FLRCTD                       | 316 SS FLRCTD                       | 316 SS FLRCTD                          | 316 SS FLRCTD                          | 316 SS FLRCTD                       |
| Bearings                                    | 316 SS/PTFE                  | 316 SS/PTFE                         | 316 SS/PTFE                         | 316 SS/PTFE                            | 316 SS/PTFE                            | 316 SS/PTFE                         |
| Thrust Washers                              | 316 SS/PTFE                  | 316 SS/PTFE                         | 316 SS/PTFE                         | 316 SS/PTFE                            | 316 SS/PTFE                            | 316 SS/PTFE                         |
| Lip Seals – Shaft, Standard                 | PTFE/ELGILOY                 | PTFE/ELGILOY                        | PTFE/ELGILOY                        | PTFE/ELGILOY                           | PTFE/ELGILOY                           | PTFE/ELGILOY                        |
| Lip Seals – Shaft, Subsea                   | PTFE/ELGILOY                 | PTFE/ELGILOY                        | PTFE/ELGILOY                        | PTFE/ELGILOY                           | PTFE/ELGILOY                           | PTFE/ELGILOY                        |
| Cover and Gland Bolting                     | B7/2H                        | B7/2H                               | L7/7                                | B7/2H                                  | L7/7                                   | 660                                 |
| Clapper Nut                                 | 2HM                          | 2HM                                 | L7M                                 | 2HM                                    | L7M                                    | 660                                 |
| Clapper Cotter PIN                          | 300 Series SS                | 300 Series SS                       | 300 Series SS                       | 300 Series SS                          | 300 Series SS                          | 300 Series SS                       |
| Clapper Anti-Rotation PIN                   | High-Strength Alloy Steel    | High-Strength Alloy Steel           | High-Strength Alloy Steel           | High-Strength Alloy Steel              | High-Strength Alloy Steel              | ASTM A564 Type 630 (17-4 pH)        |
| Gland Torque PIN                            | High-Strength Alloy Steel    | High-Strength Alloy Steel           | High-Strength Alloy Steel           | High-Strength Alloy Steel              | High-Strength Alloy Steel              | ASTM A564 Type 630 (17-4 pH)        |
| Cover Pipe Plug                             | ASTM A350 LF2                | ASTM A350 LF2                       | ASTM A350 LF2                       | ASTM A350 LF2                          | ASTM A350 LF2                          | DUPLEX                              |
| Gland Grease Fitting                        | 316 SS                       | 316 SS                              | 316 SS                              | 316 SS                                 | 316 SS                                 | 316 SS                              |
| Gland Check Fitting                         | 316 SS                       | 316 SS                              | 316 SS                              | 316 SS                                 | 316 SS                                 | 316 SS                              |
| Gland Flange Relief Fitting                 | 316 SS                       | 316 SS                              | 316 SS                              | 316 SS                                 | 316 SS                                 | 316 SS                              |
| Keys                                        | 316 SS                       | 316 SS                              | 316 SS                              | 316 SS                                 | 316 SS                                 | 316 SS                              |

## Dimensional Data


ANSI CLASS 150

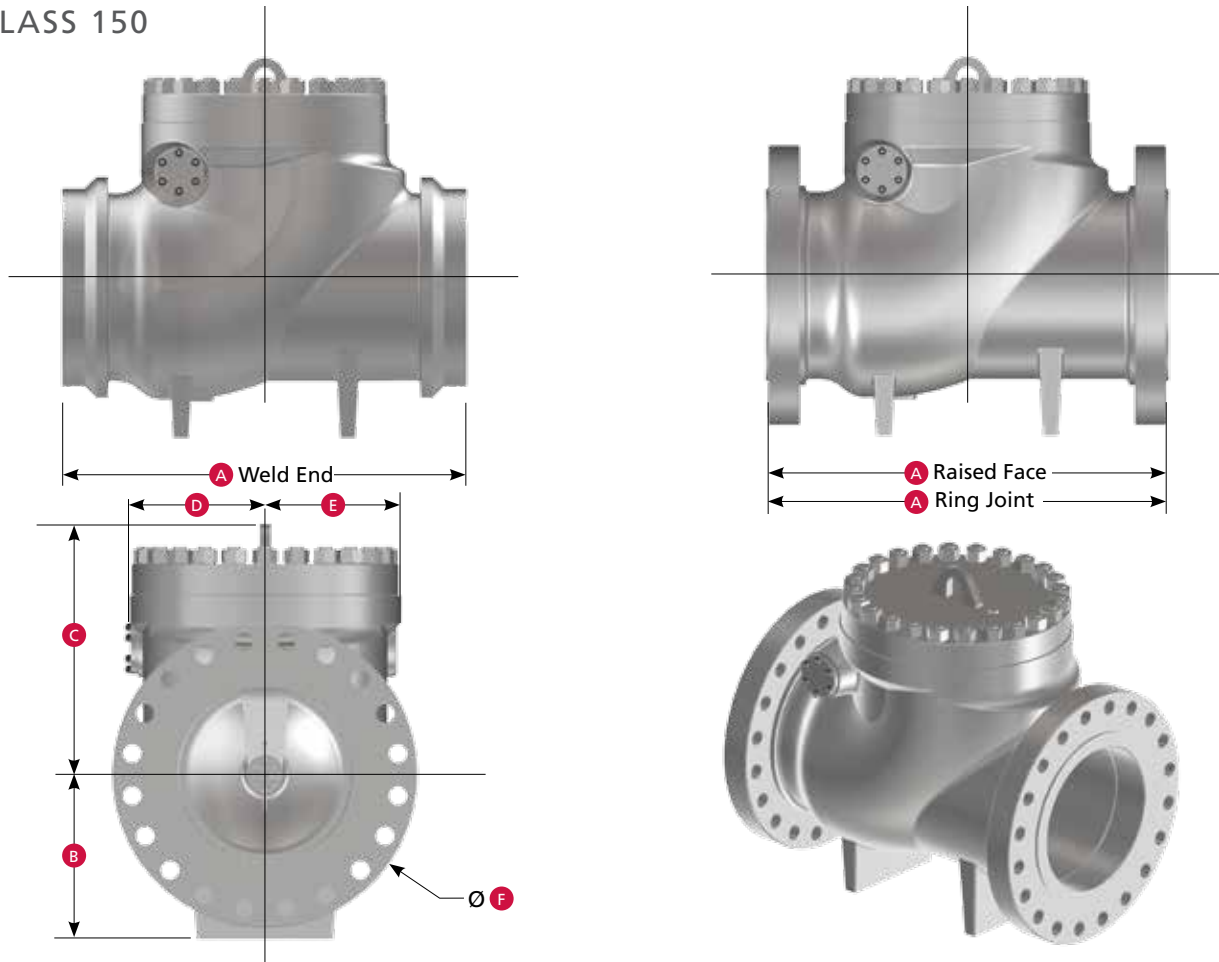

| Size<br>in. (mm) | WE – A<br>in. (mm) | RF – A<br>in. (mm) | RTJ – A<br>in. (mm) | B<br>in. (mm)    | C<br>in. (mm)     | D<br>in. (mm)    | E<br>in. (mm)    | F<br>in. (mm)     | WE<br>Weight<br>lb (kg) | FE<br>Weight<br>lb (kg) |
|------------------|--------------------|--------------------|---------------------|------------------|-------------------|------------------|------------------|-------------------|-------------------------|-------------------------|
| 6<br>(150)       | 14.0<br>(356)      | 14.0<br>(356)      | 14.5<br>(368)       | 7.25<br>(184.2)  | 12.25<br>(311.2)  | 6.50<br>(165.1)  | 6.00<br>(152.4)  | 12.50<br>(317.5)  | 270<br>(122.5)          | 297<br>(134.7)          |
| 8<br>(200)       | 19.5<br>(495)      | 19.5<br>(495)      | 20.0<br>(508)       | 8.50<br>(215.9)  | 13.50<br>(342.9)  | 6.75<br>(171.5)  | 6.75<br>(171.5)  | 15.00<br>(381.0)  | 403<br>(182.8)          | 418<br>(189.6)          |
| 10<br>(250)      | 24.5<br>(622)      | 24.5<br>(622)      | 25.0<br>(635)       | 9.75<br>(247.7)  | 15.25<br>(387.4)  | 9.00<br>(228.6)  | 8.25<br>(209.6)  | 17.50<br>(444.5)  | 619<br>(280.8)          | 638<br>(289.4)          |
| 12<br>(300)      | 27.5<br>(699)      | 27.5<br>(699)      | 28.0<br>(711)       | 11.25<br>(285.8) | 18.50<br>(469.9)  | 9.50<br>(241.3)  | 9.25<br>(235.0)  | 20.50<br>(520.7)  | 803<br>(364.2)          | 946<br>(429.1)          |
| 16<br>(400)      | 34.0<br>(864)      | 34.0<br>(864)      | 34.5<br>(876)       | 13.75<br>(349.3) | 22.00<br>(558.8)  | 11.50<br>(292.1) | 11.00<br>(279.4) | 25.25<br>(641.4)  | 1540<br>(698.5)         | 1760<br>(798.3)         |
| 20<br>(500)      | 38.5<br>(978)      | 38.5<br>(978)      | 39.0<br>(991)       | 16.25<br>(412.8) | 26.50<br>(673.1)  | 13.70<br>(348.0) | 13.50<br>(342.9) | 30.50<br>(774.7)  | 2310<br>(1047.8)        | 2640<br>(1197.5)        |
| 24<br>(600)      | 51.0<br>(1295)     | 51.0<br>(1295)     | 51.5<br>(1308)      | 19.00<br>(482.6) | 32.00<br>(812.8)  | 18.75<br>(476.3) | 18.75<br>(476.3) | 36.00<br>(914.4)  | 3630<br>(1646.5)        | 4070<br>(1846.1)        |
| 30<br>(750)      | 60.0<br>(1524)     | 60.0<br>(1524)     | See Note*           | 22.50<br>(571.5) | 37.50<br>(952.5)  | 19.50<br>(495.3) | 20.50<br>(520.7) | 43.00<br>(1092.2) | 6050<br>(2744.2)        | 7590<br>(3442.8)        |
| 36<br>(900)      | 77.0<br>(1956)     | 77.0<br>(1956)     | See Note*           | 26.00<br>(660.4) | 44.00<br>(1117.6) | 22.50<br>(571.5) | 23.50<br>(596.9) | 50.00<br>(1270.0) | 9130<br>(4141.3)        | 10,340<br>(4690.2)      |

\* Available upon request.


## ANSI CLASS 300

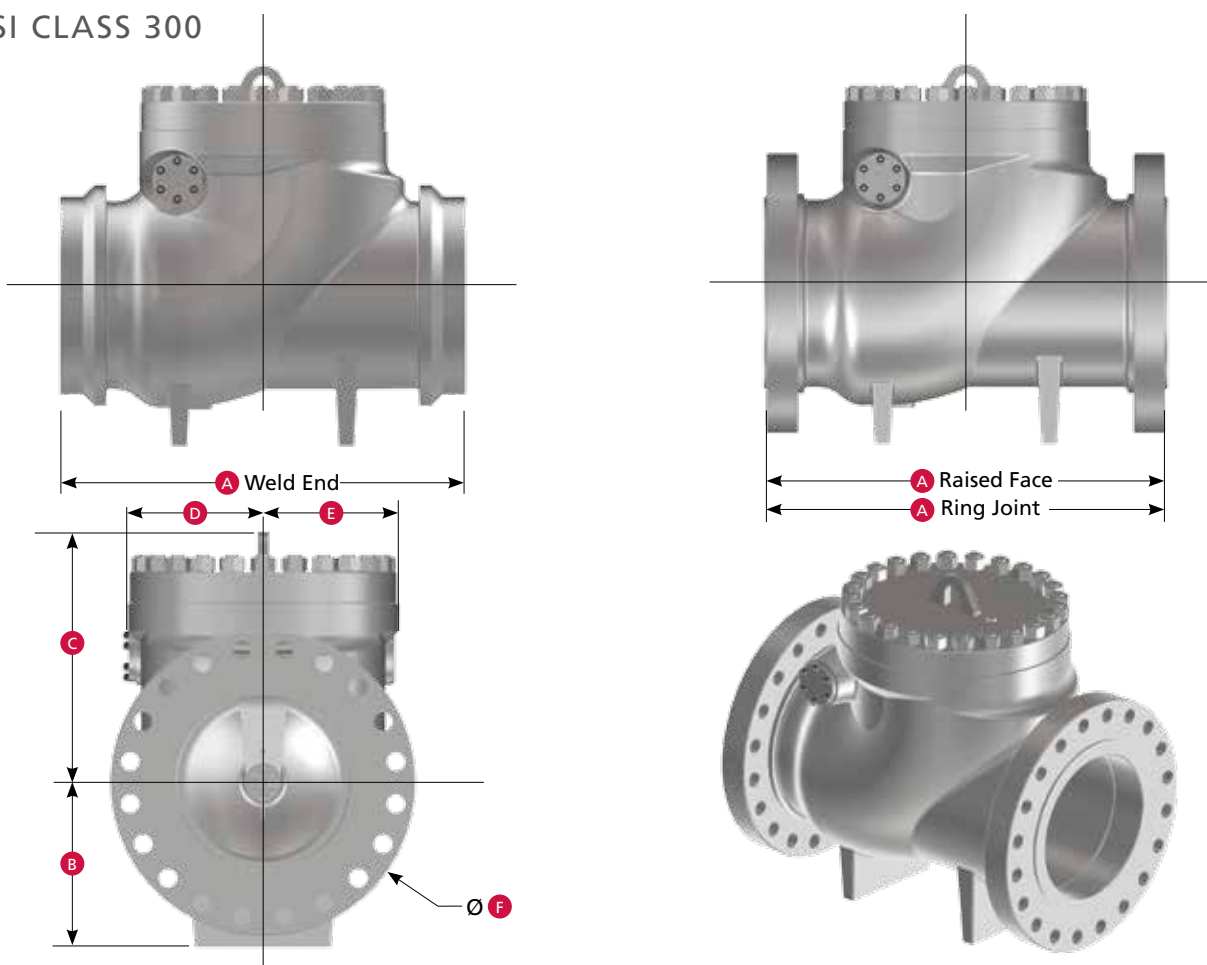

| Size<br>in. (mm) | WE – A<br>in. (mm) | RF – A<br>in. (mm) | RTJ – A<br>in. (mm) | B<br>in. (mm)    | C<br>in. (mm)     | D<br>in. (mm)    | E<br>in. (mm)    | F<br>in. (mm)     | WE<br>Weight<br>lb (kg) | FE<br>Weight<br>lb (kg) |
|------------------|--------------------|--------------------|---------------------|------------------|-------------------|------------------|------------------|-------------------|-------------------------|-------------------------|
| 6<br>(150)       | 17.5<br>(445)      | 17.5<br>(445)      | 18.1<br>(460)       | 7.25<br>(184.2)  | 12.25<br>(311.2)  | 6.75<br>(171.5)  | 6.00<br>(152.4)  | 12.50<br>(317.5)  | 264<br>(120)            | 308<br>(139.7)          |
| 8<br>(200)       | 21.0<br>(533)      | 21.0<br>(533)      | 21.6<br>(549)       | 8.50<br>(215.9)  | 13.50<br>(342.9)  | 6.75<br>(171.5)  | 6.75<br>(171.5)  | 15.00<br>(381.0)  | 281<br>(127)            | 484<br>(219.5)          |
| 10<br>(250)      | 24.5<br>(622)      | 24.5<br>(622)      | 25.1<br>(638)       | 9.75<br>(247.7)  | 15.25<br>(387.4)  | 9.00<br>(228.6)  | 8.25<br>(209.6)  | 17.50<br>(444.5)  | 646<br>(293)            | 693<br>(314.3)          |
| 12<br>(300)      | 28.0<br>(711)      | 28.0<br>(711)      | 28.6<br>(727)       | 11.25<br>(285.8) | 18.50<br>(469.9)  | 9.75<br>(247.7)  | 9.25<br>(235.0)  | 20.50<br>(520.7)  | 937<br>(425)            | 1001<br>(454.1)         |
| 16<br>(400)      | 34.0<br>(864)      | 34.0<br>(864)      | 34.6<br>(879)       | 13.75<br>(349.3) | 22.00<br>(558.8)  | 11.50<br>(292.1) | 11.00<br>(279.4) | 25.25<br>(641.4)  | 1540<br>(698.5)         | 1760<br>(798.3)         |
| 20<br>(500)      | 40.0<br>(1016)     | 40.0<br>(1016)     | 40.8<br>(1035)      | 16.25<br>(412.8) | 26.50<br>(673.1)  | 13.75<br>(349.3) | 13.50<br>(342.9) | 30.50<br>(774.7)  | 2640<br>(1197.5)        | 3080<br>(1397.1)        |
| 24<br>(600)      | 53.0<br>(1346)     | 53.0<br>(1346)     | 53.9<br>(1368)      | 19.00<br>(482.6) | 32.00<br>(812.8)  | 18.75<br>(476.3) | 18.75<br>(476.3) | 36.00<br>(914.4)  | 4290<br>(1945.9)        | 4730<br>(2145.5)        |
| 30<br>(750)      | 62.8<br>(1594)     | 62.8<br>(1594)     | 63.7<br>(1619)      | 22.50<br>(571.5) | 37.50<br>(952.5)  | 19.50<br>(495.3) | 20.50<br>(520.7) | 43.00<br>(1092.2) | 7931<br>(3597.4)        | 8250<br>(3742.1)        |
| 36<br>(900)      | 82.0<br>(2083)     | 82.0<br>(2083)     | See Note*           | 26.00<br>(660.4) | 44.00<br>(1117.6) | 22.50<br>(571.5) | 23.50<br>(596.9) | 50.00<br>(1270.0) | 13,200<br>(5987.4)      | 14,300<br>(6486.4)      |

## Dimensional Data



ANSI CLASS 600

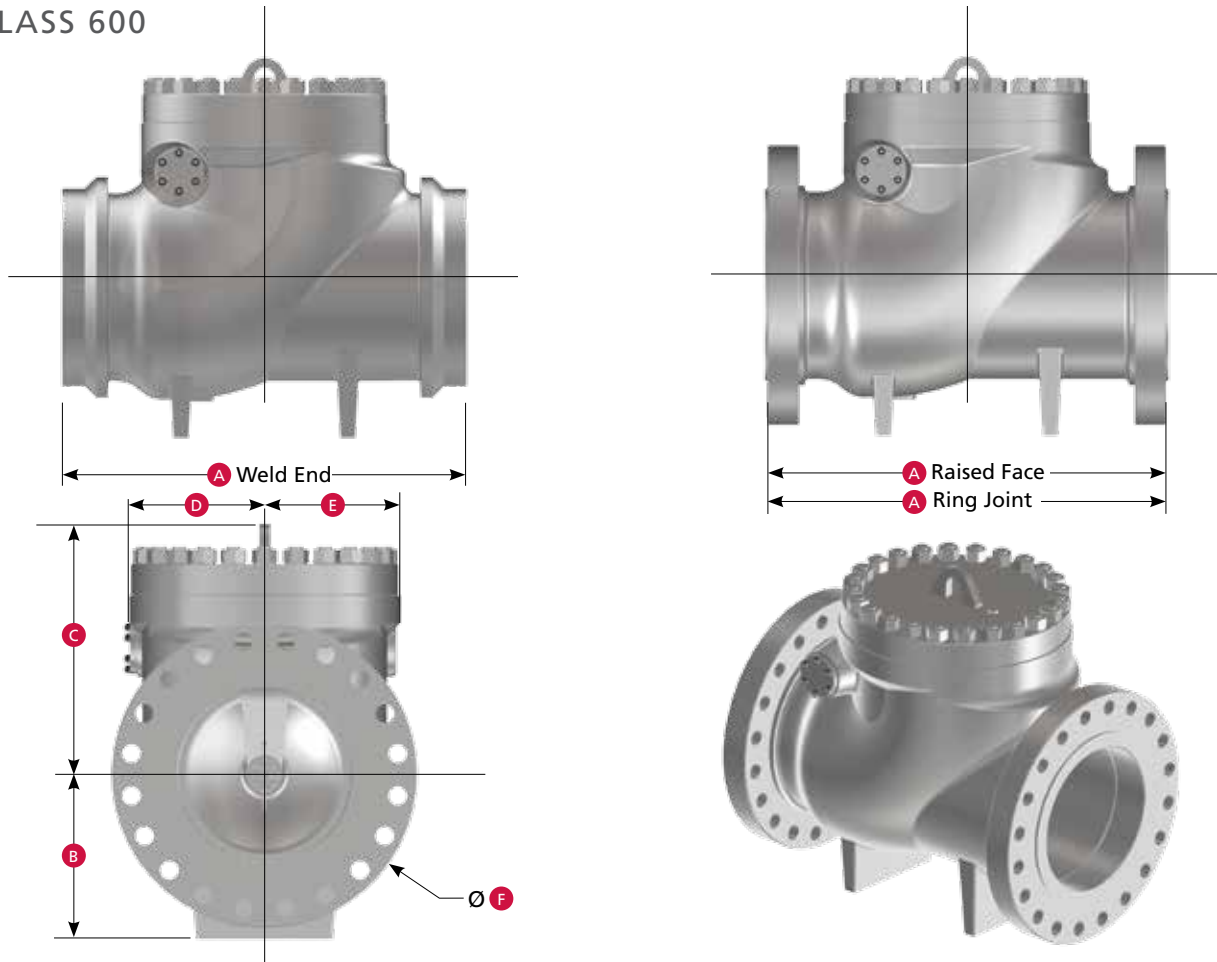

| Size<br>in. (mm) | WE – A<br>in. (mm) | RF – A<br>in. (mm) | RTJ – A<br>in. (mm) | B<br>in. (mm)    | C<br>in. (mm)     | D<br>in. (mm)    | E<br>in. (mm)    | F<br>in. (mm)     | WE<br>Weight<br>lb (kg) | FE<br>Weight<br>lb (kg) |
|------------------|--------------------|--------------------|---------------------|------------------|-------------------|------------------|------------------|-------------------|-------------------------|-------------------------|
| 6<br>(150)       | 22.0<br>(559)      | 22.0<br>(559)      | 22.1<br>(562)       | 8.00<br>(203.2)  | 13.25<br>(336.6)  | 8.75<br>(222.3)  | 8.00<br>(203.2)  | 14.00<br>(355.6)  | 407<br>(185)            | 462<br>(210)            |
| 8<br>(200)       | 26.0<br>(660)      | 26.0<br>(660)      | 26.1<br>(664)       | 9.50<br>(241.3)  | 14.50<br>(368.3)  | 8.00<br>(203.2)  | 7.50<br>(190.5)  | 16.50<br>(419.1)  | 665<br>(302)            | 737<br>(334)            |
| 10<br>(250)      | 31.0<br>(787)      | 31.0<br>(787)      | 31.1<br>(791)       | 11.00<br>(279.4) | 16.50<br>(419.1)  | 10.00<br>(254.0) | 9.25<br>(235.0)  | 20.00<br>(508.0)  | 1097<br>(498)           | 1210<br>(549)           |
| 12<br>(300)      | 33.0<br>(838)      | 33.0<br>(838)      | 33.1<br>(841)       | 12.00<br>(304.8) | 19.55<br>(496.6)  | 11.00<br>(279.4) | 10.00<br>(254.0) | 22.00<br>(558.8)  | 1421<br>(644.6)         | 1540<br>(698.5)         |
| 16<br>(400)      | 39.0<br>(991)      | 39.0<br>(991)      | 39.1<br>(994)       | 14.50<br>(368.3) | 22.25<br>(565.2)  | 12.40<br>(315.0) | 12.00<br>(304.8) | 27.00<br>(685.8)  | 2420<br>(1098)          | 2640<br>(1198)          |
| 20<br>(500)      | 47.0<br>(1194)     | 47.0<br>(1194)     | 47.3<br>(1200)      | 17.00<br>(431.8) | 28.50<br>(723.9)  | 15.00<br>(381.0) | 15.00<br>(381.0) | 32.00<br>(812.8)  | 3960<br>(1796)          | 4620<br>(2096)          |
| 24<br>(600)      | 55.0<br>(1397)     | 55.0<br>(1397)     | 55.4<br>(1407)      | 19.50<br>(495.3) | 34.55<br>(877.6)  | 18.00<br>(457.2) | 18.00<br>(457.2) | 37.00<br>(939.8)  | 6270<br>(2844)          | 7260<br>(3293)          |
| 30<br>(750)      | 65.0<br>(1651)     | 65.0<br>(1651)     | 65.5<br>(1664)      | 23.50<br>(596.9) | 39.00<br>(990.6)  | 21.50<br>(546.1) | 23.00<br>(584.2) | 44.50<br>(1130.3) | 10,560<br>(4790)        | 12,100<br>(5489)        |
| 36<br>(900)      | 82.0<br>(2083)     | 82.0<br>(2083)     | 82.6<br>(2099)      | 27.50<br>(698.5) | 48.25<br>(1225.6) | 24.75<br>(628.7) | 25.75<br>(654.1) | 51.75<br>(1314.5) | 18,700<br>(8482)        | 20,900<br>(9480)        |




## ANSI CLASS 900

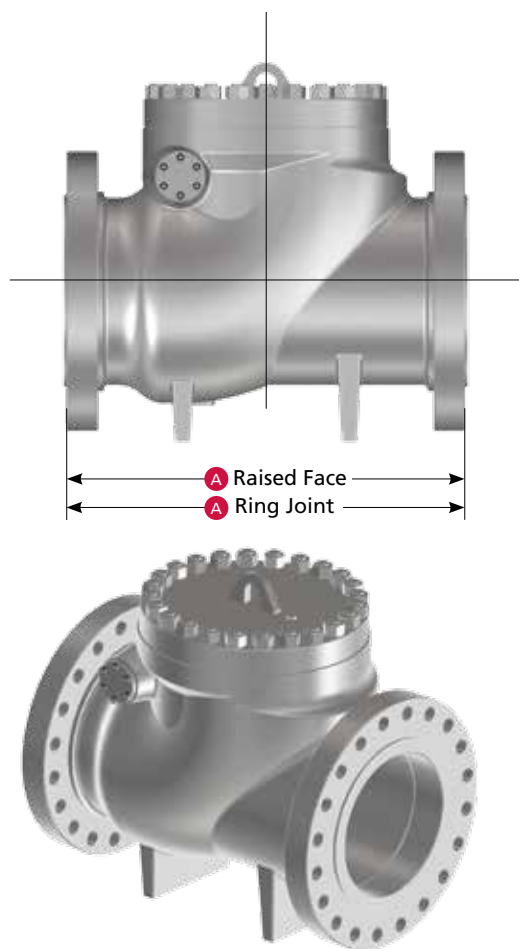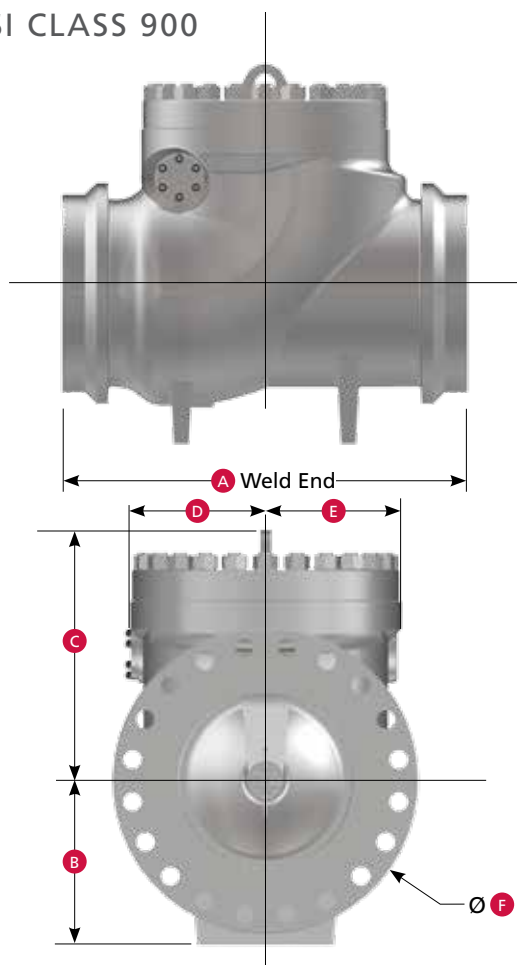

| Size<br>in. (mm) | WE – A<br>in. (mm) | RF – A<br>in. (mm) | RTJ – A<br>in. (mm) | B<br>in. (mm)    | C<br>in. (mm)     | D<br>in. (mm)    | E<br>in. (mm)    | F<br>in. (mm)     | WE<br>Weight<br>lb (kg) | FE<br>Weight<br>lb (kg) |
|------------------|--------------------|--------------------|---------------------|------------------|-------------------|------------------|------------------|-------------------|-------------------------|-------------------------|
| 6<br>(150)       | 24.0<br>(610)      | 24.0<br>(610)      | 24.1<br>(6130)3     | 8.50<br>(215.9)  | 13.75<br>(349.3)  | 7.50<br>(190.5)  | 6.75<br>(171.5)  | 15.00<br>(381.0)  | 536<br>(243)            | 616<br>(279)            |
| 8<br>(200)       | 29.0<br>(737)      | 29.0<br>(737)      | 29.1<br>(740)       | 10.25<br>(260.4) | 15.00<br>(381.0)  | 8.75<br>(222.3)  | 8.00<br>(203.2)  | 18.50<br>(469.9)  | 910<br>(413)            | 1034<br>(469)           |
| 10<br>(250)      | 33.0<br>(838)      | 33.0<br>(838)      | 33.1<br>(841)       | 11.75<br>(298.5) | 17.50<br>(444.5)  | 10.75<br>(273.1) | 10.00<br>(254.0) | 21.50<br>(546.1)  | 1487<br>(674)           | 1650<br>(748)           |
| 12<br>(300)      | 38.0<br>(965)      | 38.0<br>(965)      | 38.1<br>(968)       | 13.00<br>(330.2) | 20.75<br>(527.1)  | 11.75<br>(298.5) | 10.75<br>(273.1) | 24.00<br>(609.6)  | 1836<br>(833)           | 2200<br>(998)           |
| 16<br>(400)      | 44.5<br>(1130)     | 44.5<br>(1130)     | 44.9<br>(1140)      | 15.00<br>(381.0) | 24.00<br>(609.6)  | 13.75<br>(349.3) | 13.00<br>(330.2) | 27.75<br>(704.9)  | 3300<br>(1497)          | 3740<br>(1696)          |
| 20<br>(500)      | 52.0<br>(1321)     | 52.0<br>(1321)     | 52.5<br>(1334)      | 18.00<br>(457.2) | 30.00<br>(762.0)  | 15.75<br>(400.1) | 16.00<br>(406.4) | 33.75<br>(857.3)  | 5500<br>(2494)          | 6600<br>(2994)          |
| 24<br>(600)      | 61.0<br>(1549)     | 61.0<br>(1549)     | 61.8<br>(1568)      | 21.50<br>(546.1) | 36.75<br>(933.5)  | 19.50<br>(495.3) | 19.50<br>(495.3) | 41.00<br>(1041.4) | 9350<br>(4241)          | 12,100<br>(5488)        |
| 30<br>(750)      | 74.5<br>(1892)     | 74.5<br>(1892)     | 74.9<br>(1902)      | 25.25<br>(641.4) | 43.00<br>(1092.2) | 23.75<br>(603.3) | 23.25<br>(590.6) | 48.50<br>(1231.9) | 16,500<br>(7484)        | 18,700<br>(8482)        |
| 36<br>(900)      | 90.5<br>(2299)     | 90.5<br>(2299)     | 91.1<br>(2314)      | 30.00<br>(762.0) | 50.00<br>(1270.0) | 26.75<br>(679.5) | 27.50<br>(698.5) | 57.50<br>(1460.5) | 26,400<br>(11,975)      | 31,900<br>(14,470)      |

## Dimensional Data

ANSI CLASS 1500

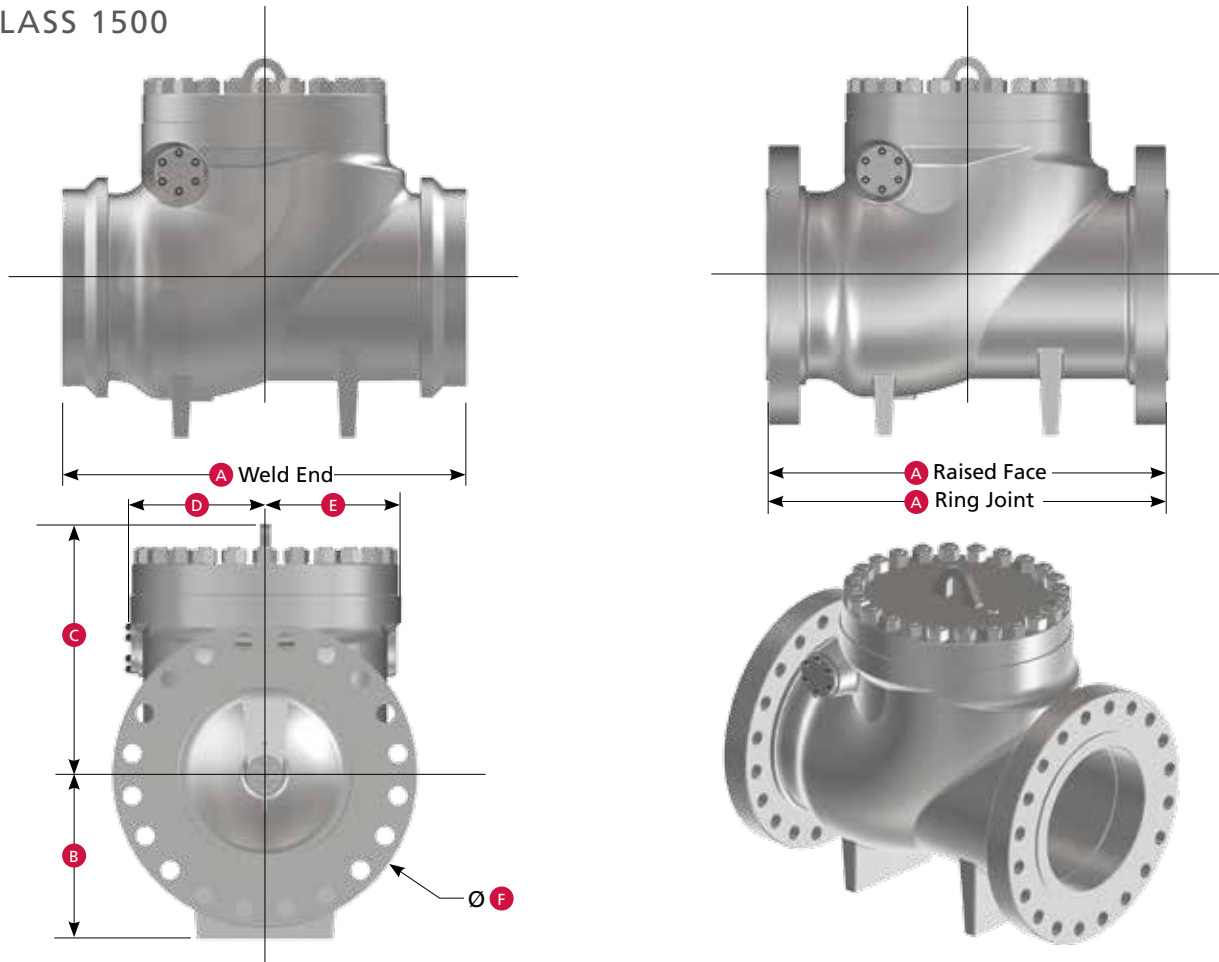

| Size<br>in. (mm) | WE – A<br>in. (mm) | RF – A<br>in. (mm) | RTJ – A<br>in. (mm) | B<br>in. (mm)    | C<br>in. (mm)     | D<br>in. (mm)    | E<br>in. (mm)    | F<br>in. (mm)     | WE<br>Weight<br>lb (kg) | FE<br>Weight<br>lb (kg) |
|------------------|--------------------|--------------------|---------------------|------------------|-------------------|------------------|------------------|-------------------|-------------------------|-------------------------|
| 6<br>(150)       | 27.8<br>(705)      | 27.8<br>(705)      | 28.0<br>(711)       | 8.75<br>(222.3)  | 16.00<br>(406.4)  | 9.00<br>(228.6)  | 7.75<br>(196.9)  | 15.50<br>(393.7)  | 870<br>(394.6)          | 1001<br>(454.1)         |
| 8<br>(200)       | 32.8<br>(832)      | 32.8<br>(832)      | 33.1<br>(841)       | 10.50<br>(266.7) | 17.75<br>(450.9)  | 10.00<br>(254.0) | 9.00<br>(228.6)  | 19.00<br>(482.6)  | 1454<br>(659.5)         | 1650<br>(748.4)         |
| 10<br>(250)      | 39.0<br>(991)      | 39.0<br>(991)      | 39.4<br>(1000)      | 12.50<br>(317.5) | 20.25<br>(514.4)  | 12.00<br>(304.8) | 10.75<br>(273.1) | 23.00<br>(584.2)  | 2093<br>(949.4)         | 2750<br>(1247.4)        |
| 12<br>(300)      | 44.5<br>(1130)     | 44.5<br>(1130)     | 45.1<br>(1146)      | 14.25<br>(362.0) | 24.00<br>(609.6)  | 13.00<br>(330.2) | 12.50<br>(317.5) | 26.50<br>(673.1)  | 3571<br>(1619.8)        | 4070<br>(1846.1)        |
| 16<br>(400)      | 54.5<br>(1384)     | 54.5<br>(1384)     | 55.4<br>(1407)      | 17.25<br>(438.2) | 27.00<br>(685.8)  | 16.00<br>(406.4) | 15.00<br>(381.0) | 32.50<br>(825.5)  | 5563<br>(2523.3)        | 7040<br>(3193.3)        |
| 20<br>(500)      | 65.5<br>(1664)     | 65.5<br>(1664)     | 66.4<br>(1686)      | 20.50<br>(520.7) | 33.00<br>(838.2)  | 18.75<br>(476.3) | 18.00<br>(457.2) | 38.75<br>(984.3)  | 10,099<br>(4580.8)      | 13,200<br>(5987.4)      |
| 24<br>(600)      | 76.5<br>(1943)     | 76.5<br>(1943)     | 77.6<br>(1972)      | 24.00<br>(609.6) | 41.25<br>(1047.8) | 21.75<br>(552.5) | 21.75<br>(552.5) | 46.00<br>(1168.4) | 16,485<br>(7477.5)      | 20,900<br>(9480.1)      |

## FLOW COEFFICIENT DATA

### Liquid (Incompressible Flow)

$$C_v = Q \sqrt{\frac{G}{\Delta P}} \quad Q = C_v \sqrt{\frac{\Delta P}{G}} \quad \Delta P = \left[ \frac{Q}{C_v} \right]^2$$

### Gas (Compressible Flow)

$$C_v = \frac{Q}{963} \sqrt{\frac{GT}{P_1^2 - P_2^2}} \quad Q = C_v 963 \sqrt{\frac{P_1^2 - P_2^2}{GT}}$$

#### Where:

Q = Flow (gal/min for liquids, cf/hour for gases)

$C_v$  = Flow Coefficient

$P_1$  = Inlet Pressure (psia)

$P_2$  = Outlet Pressure (psia)

$\Delta P$  = Pressure Drop ( $P_1 - P_2$ )

T = Absolute Temperature ( $^{\circ}F + 460$ )

G = Specific Gravity (water = 1)

| Size<br>in. (mm) | $C_v$  |
|------------------|--------|
| 12<br>(300)      | 5670   |
| 16<br>(400)      | 14,536 |
| 20<br>(500)      | 16,771 |
| 24<br>(600)      | 24,725 |
| 30<br>(750)      | 29,533 |
| 36<br>(900)      | 50,492 |

## STANDARD END CONFIGURATIONS

### Integral Seat

Figure 54 – Flanged end RTJ x RTJ (Type R ring joint)

Figure 55 – Flanged end RF x RF

Figure 66 – Weld end WE x WE

### Renewable Seat

Figure 15XY where:

X represents the ASME pressure class

Y represents the end connection

Other valve end configurations are available, and the figure numbers are listed below. Dimensions and weights for these figure numbers are available upon request.

### Integral Seat

Figure 52 – Hub end (customer to specify the hub type)

Figure 56 – Flanged end RTJ x RTJ (type BX ring joint)


Figure 57 – Flanged end (upstream) x weld end (downstream)

Figure 58 – Weld end (upstream) x flanged end (downstream)

| Pressure ASME<br>Class | X |
|------------------------|---|
| 150                    | 1 |
| 300                    | 3 |
| 400                    | 4 |
| 600                    | 6 |
| 900                    | 7 |
| 1500                   | 8 |
| 2500                   | 9 |

| End<br>Connection | Y |
|-------------------|---|
| RTJ               | 4 |
| RF                | 5 |
| WE                | 9 |

## HOW TO ORDER

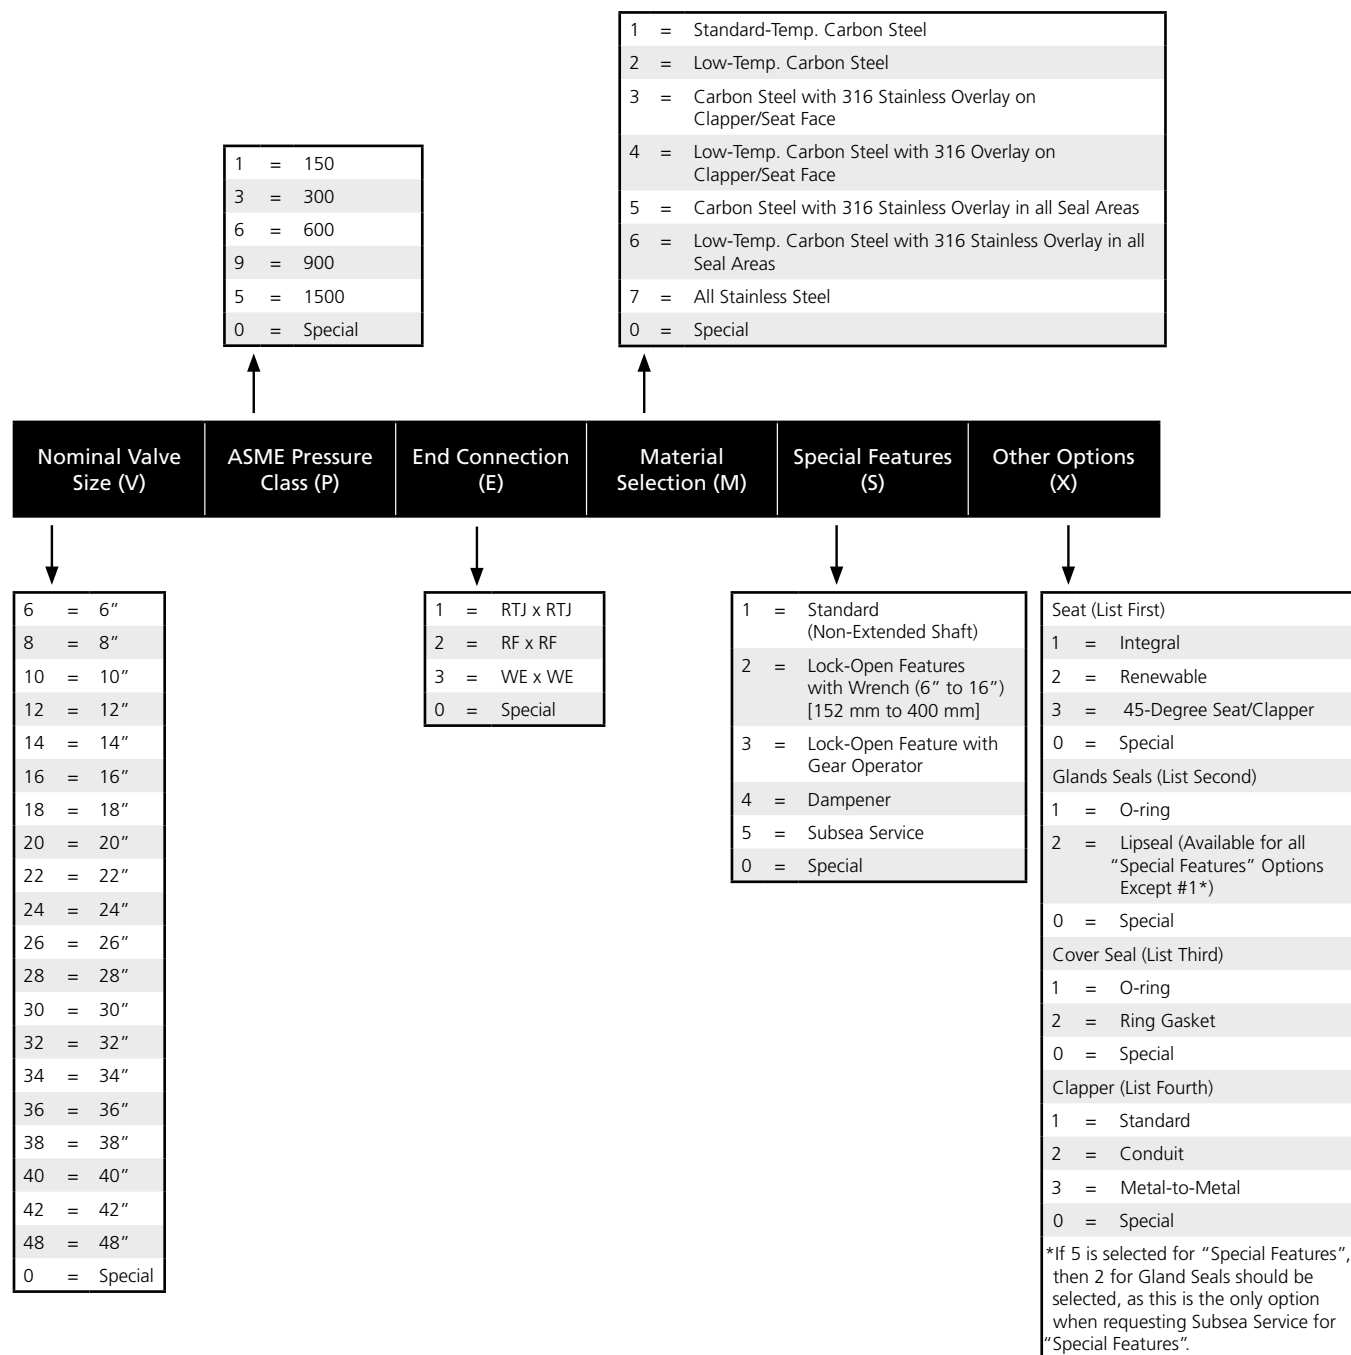

Example:

V16-P6-E1-M1-S5-X1211 = 16", ASME Class 600, RTJ x RTJ, Standard-Temperature Carbon Steel, Subsea Service, Integral Seat, Lipseal Gland Seals, O-ring Cover Seals, Standard Clapper.

## QUALITY ASSURANCE

Cameron's commitment to quality is based on ISO 9000 and API Q1 codes. All valves are designed in accordance with stringent industry procedures and standards and are built according to the European Directive PED and ATEX, upon request. The quality department monitors and controls all phases of valve production, inspection, and testing.

Cameron uses web-based standardization tools, standardized supplier qualification processes, site-based product validations, and performance metrics to maintain compliance to quality requirements. Cameron applies this quality strategy to its factories globally. Our main goal is to do it right the first time to achieve the best customer satisfaction.

### Certifications

Cameron is ISO 9000 certified and meets API Q1 standards.

### Licenses

Cameron holds API 6D, API 6D SS, ATEX, PED 97/23/EC (CE), GOST-R, and CRN auditing/inspections.

### Testing

All valves are tested per API 6D/ISO 14313 and API598 standards.



CAMERON ball valves and TOM WHEATLEY check valves are used for subsea production.



## CAMSERV™ Aftermarket Services for Valves and Actuation

WE BUILD IT. WE BACK IT.



### Global Network and Local Support

Cameron is well-positioned to deliver total aftermarket support, quickly and efficiently, with unmatched OEM expertise. Our highly skilled engineers and technicians are available around the clock, seven days a week, to respond to customer queries, troubleshoot problems, and offer reliable solutions.

### Easily Accessible Parts and Spare Valves

- OEM spare valves, actuators, and parts (including non-Cameron brands)
- Handling, storage, packaging, and delivery
- Dedicated stocking program

### Comprehensive Aftermarket Services Portfolio

- Parts and spare valves
- Repair
- Field services
- Preventative maintenance
- Equipment testing and diagnostics
- Remanufacturing
- Asset preservation
- Customer property management
- Training and recertification services
- Warranty

### Customized Total Valve Care<sup>SM</sup> (TVC) Programs

Cameron provides customized asset management plans that optimize uptime, availability, and dedicated services.

- Engineering consultancy
- Site management
- Flange management
- Startup and commissioning
- Spare parts and asset management
- Operational support











3250 Briarpark Drive, Suite 300

Houston, TX 77042

USA

Tel 1 281 499 8511

For more information on TOM WHEATLEY check valves:

[TOMWHEATLEY@c-a-m.com](mailto:TOMWHEATLEY@c-a-m.com)

[www.c-a-m.com/TOMWHEATLEY](http://www.c-a-m.com/TOMWHEATLEY)



#### HSE Policy Statement

At Cameron, we are committed ethically, financially and personally to a working environment where no one gets hurt and nothing gets harmed.