


RF ATTENUATORS PANEL -20dB

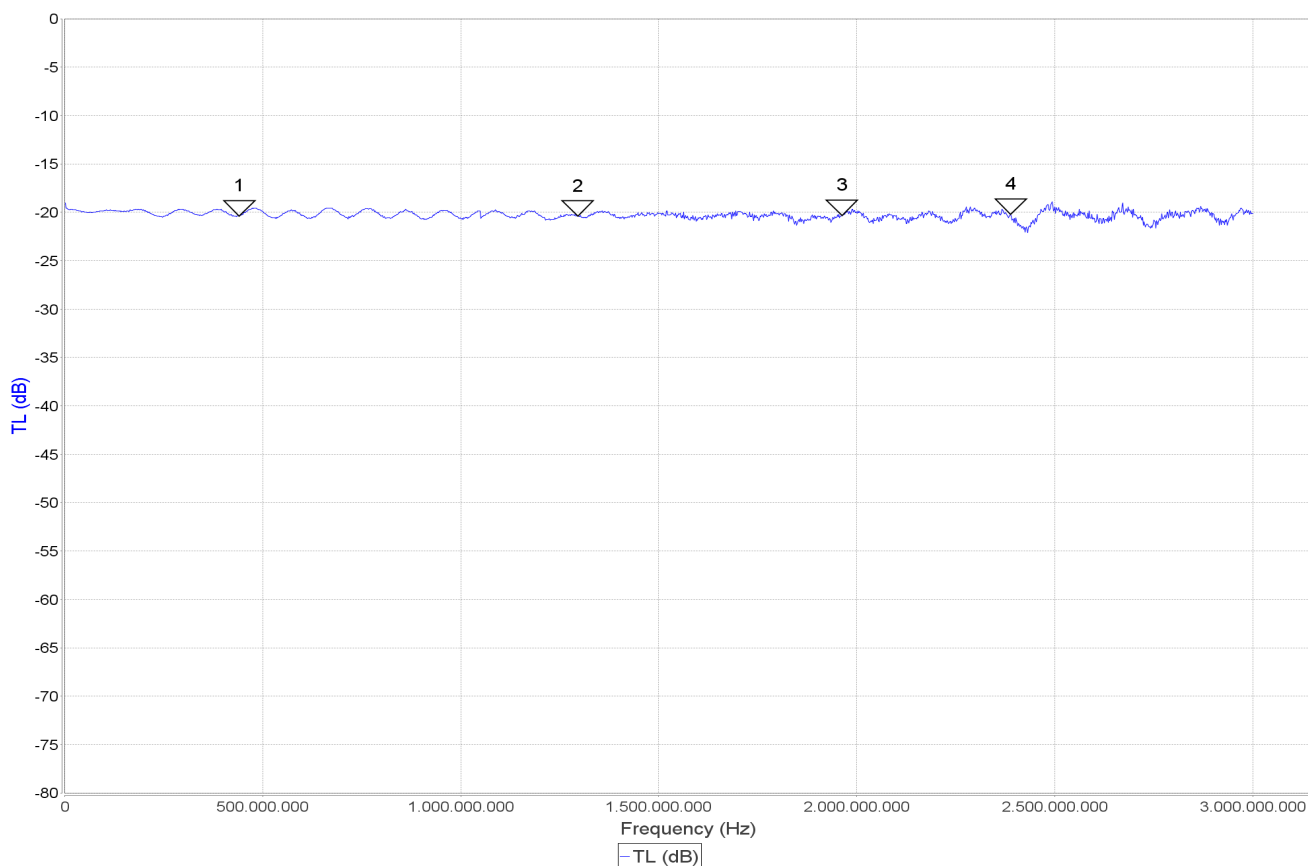

Marker	Freq. (Hz)	TL (dB)	TP (°)	Z (Ω)	Rs (Ω)	Xs (Ω)	Theta	gr (ns)
1	440.724.448	-20,39	-54,24	0,0	0,0	0,0	0,0	1,4
2	1.295.101.336	-20,42	-141,83	0,0	0,0	0,0	0,0	0,7
1-2	854.376.888	0,04	87,58	0,0	0,0	0,0	0,0	---
3	1.962.402.472	-20,32	142,84	0,0	0,0	0,0	0,0	0,6
4	2.388.626.608	-20,21	103,25	0,0	0,0	0,0	0,0	-3,2

Comment:

Date: 8/3/2017 1:02
 Mode: Transmission
 Analyser: miniVNA Tiny / mini radio solutions - miniVNA Tiny

Scan

Start: 1000000 / 1.000.000
 Stop: 2999998612 / 2.999.998.612
 Samples: 1556
 Overscan: 1

Calibration

Samples: 10000
 Overscan: 0
 File: TRAN_rednew.cal

User: makis

Headline: RF ATTENUATORS PANEL -20dB

Port extension len: <not set>m

Port extension vf: <not set>