



3000 SERIES LOW PROFILE STRIKES



- Often requires up to 70% less cutting of the frame face as compared to conventional electric strikes
- An electric strike with a 1" total backset for installation without the removal of most dust boxes.
- Holding force: 1200 lbs
- Life cycle: 500,000
- Fail secure
- Stocked intermittent duty only
- All stainless steel locking mechanism

MFG #	FINISH	VOLTAGE	EZ #
FITS ANSI 115.3, 2-3/4", "T" STYLE			
3234 12VDC26D	Satin Chrome	12VDC	074387
3234 24VDC26D	Satin Chrome	24VDC	074389

1/2" THIN RIM EXIT DEVICE STRIKE

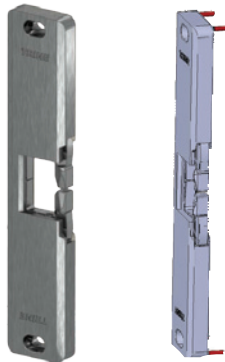

- 1/2" profile is 1/4" thinner than standard surface mount rim exit device strikes for applications where the door to frame gap is minimal
- Voltage: Built in electronics allow the strike to operate with DC voltages between 11-30 volts
- Built-in surge and kick-back protection
- Patented anchoring system provides extra strength
- 1/8" steel spacer included when 5/8" profile is required
- Grade 1 all stainless steel construction
- Requires 500 mA pull-in & 178mA holding current @ 12VDC, 255mA pull-in & 84mA @ 24VDC
- Measures: 9"H x 3/4"W x 1/2"D

MFG #	FINISH	EZ #
4850 32D	Stainless Steel	100291

WIRELESS ENTRY/EXIT SIGNAL KIT



- 1 note, 2 note or 8 note melody chime, field selectable
- Wireless battery-operated door contact switch A-23 battery (included)
- Up to 100ft range - 128 selectable codes
- Receiver plugs into 120 VAC outlet
- Transmitter mounting hardware provided
- Adjustable volume control
- 74db (low) 82db (high) @ 3ft
- UL recognized, FCC-IC approved

MFG #	EZ #
206 3	060432