


PRODUCT DATA SHEET

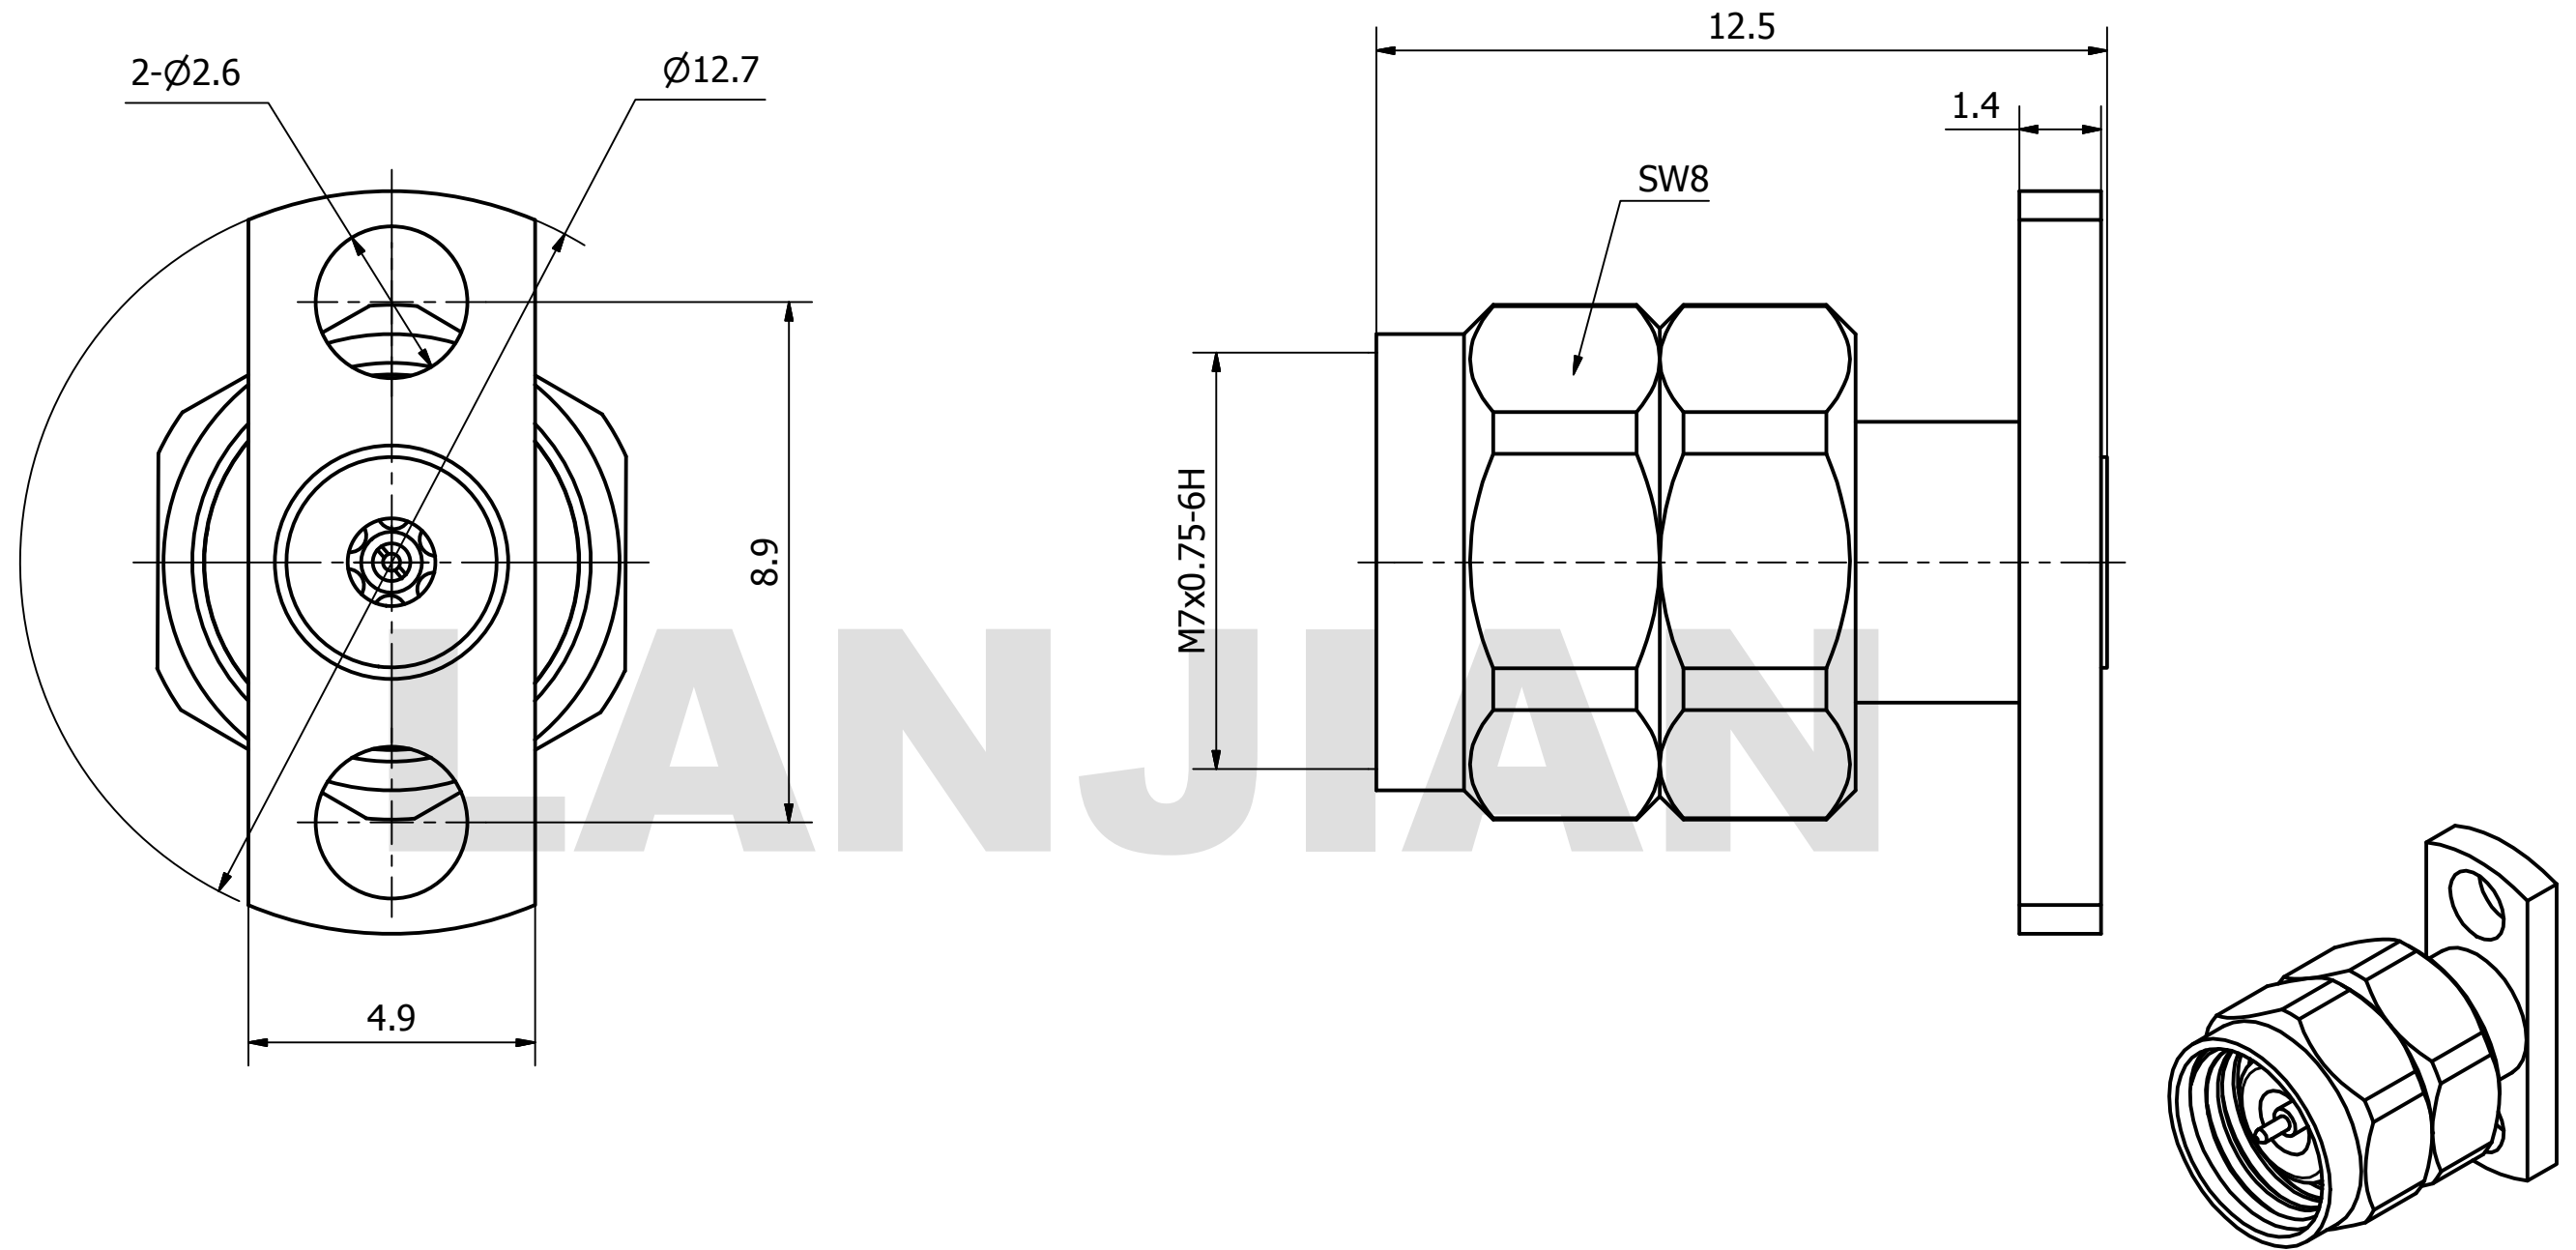

MATERIAL:
 BODY: STAINLESS STEEL, ALLOY UNS S31603
 CONTACT: BERYLLIUM COPPER PER ASTM B196.
 ALLOY NO. UNS C17300
 INSULATOR: PEI

PERFORMANCE:
 IMPEDANCE: 50 OHMS
 FREQUENCY: DC TO 50 GHz
 VSWR: ≤ 1.30

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"	MATERIAL :			38 Hengtong Road, Xinqu Dingmao Zhenjiang, 212009, Jiangsu, P. R. China	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM				
	TOLERANCES :				
	X.X ± 0.20	ANGULAR : ± 1°	DEBURR AND BREAK SHARP EDGES		
	X.XX ± 0.10	FILLETS R/C : ± 0.10			
	X.XXX ± 0.01	SURFACE FINISH : Ra 1.6			
DRAWN	NAME	DATE	SIGNATURE	TITLE 2.4-JFD(2) straight connector	
CHK'D					
APPV'D					
MFG					
PROJECTION	SIZE	SCALE		DWG No.	REV.
	A3	8: 1		GCPZ3.650.O.001	
DO NOT SCALE THE DRAWING				PAGE	1 / 1