

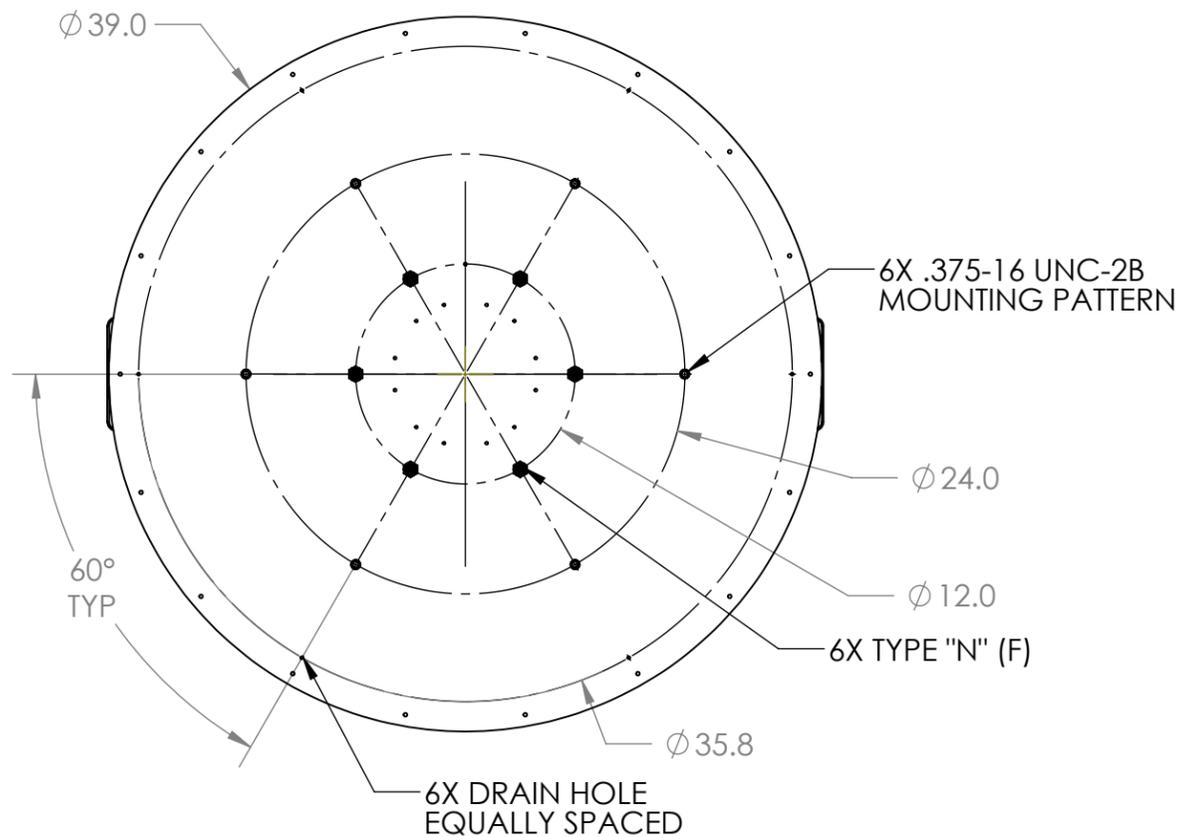


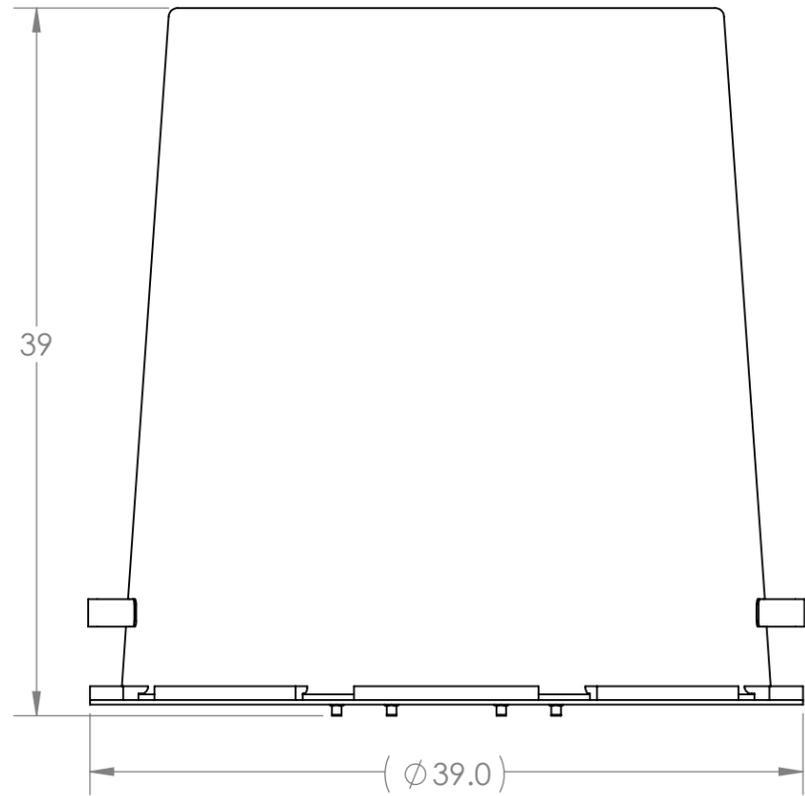

VISLINK

SPECIFICATIONS

- 1) DESCRIPTION; 6X 60 DEGREE SECTOR ARRAY
- 2) SECTORS ARE INDIVIDUALLY ADJUSTABLE FROM 0 DEGREE TO +15 DEG ELEVATION UPTILT.
- 3) I/O CONNECTOR; TYPE "N" (F), 1 PER SECTOR.
- 4) ELECTRICAL (PER SECTOR)
 - A) FREQUENCY; 2.0 - 2.5 GHz
 - B) VSWR; 1.5:1 MAX
 - C) POLARITY; VERTICAL
 - D) GAIN; 17dBi
 - E) BEAMWIDTH, VERTICAL; 8 DEGREES
 - F) BEAMWIDTH, HORIZONTAL; 60 DEGREES
- 5) WEIGHT; APPROX. 75 LBS.
- 6) OPTIONAL POLE MOUNT AVAILABLE.
- 7) DIMENSIONS 39"W X 39"H
- 8) CAUTION, DO NOT USE HANDLES TO LIFT ANTENNA. HANDLES FOR SERVICE ONLY.

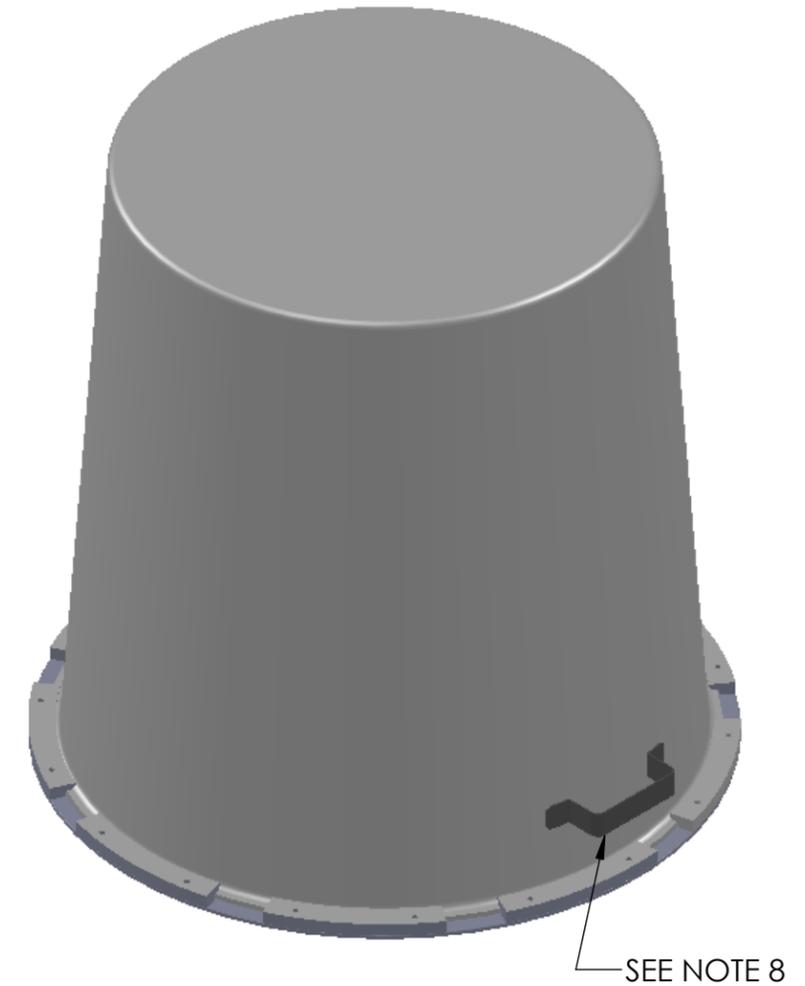

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Vislink LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Vislink LLC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	VISLINK LLC	
DIMENSIONS ARE IN INCHES		DRAWN	M.McCARTEN	210308	TITLE: ARRAY, SECTOR 6X 60 DEGREE, 17dBi
TOLERANCES:		CHECKED	-	-	
FRACTIONAL ±		MECH. ENG.	-	-	
ANGULAR: MACH ± BEND ±		ELEC. ENG.	-	-	
TWO PLACE DECIMAL ±.015		MFG.	-	-	
THREE PLACE DECIMAL ±.005		COMMENTS:	-		
MATERIAL	SEE NOTES	SIZE B			
FINISH	SEE NOTES	DWG. NO. 9019217			
DO NOT SCALE DRAWING		REV 2			
SCALE: 1:12				WEIGHT:	SHEET 1 OF 2