

RENDERING IMAGES SHOWN ON THIS SHEET ARE FOR DESIGN INTENT ONLY AND ARE NOT INTENDED FOR CONSTRUCTION




WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303

No.	Date	Issue	By	Check
-----	------	-------	----	-------

Revisions


No.	Date	Revision	By	Check
-----	------	----------	----	-------

RENDERING VIEWS



Function of Space Legend


Symbol	Description
<div></div>	Not in Scope
<div></div>	Assembly (Unconcentrated) Occupancy
<div></div>	Business Occupancy
<div>FEC</div>	Fire Extinguisher Cabinet - Type ABC
<div>Room</div>	Room Tag in Scope of Project
<div>N.I.S.</div>	Room Tag Not in Scope of Project
<div>● — ➔</div>	Life Safety Path of Exit Travel (Exit from Tenant Suite)
<div>⊗ ⊙</div>	Exit Signage - See RCPs for Exact Locations/Info

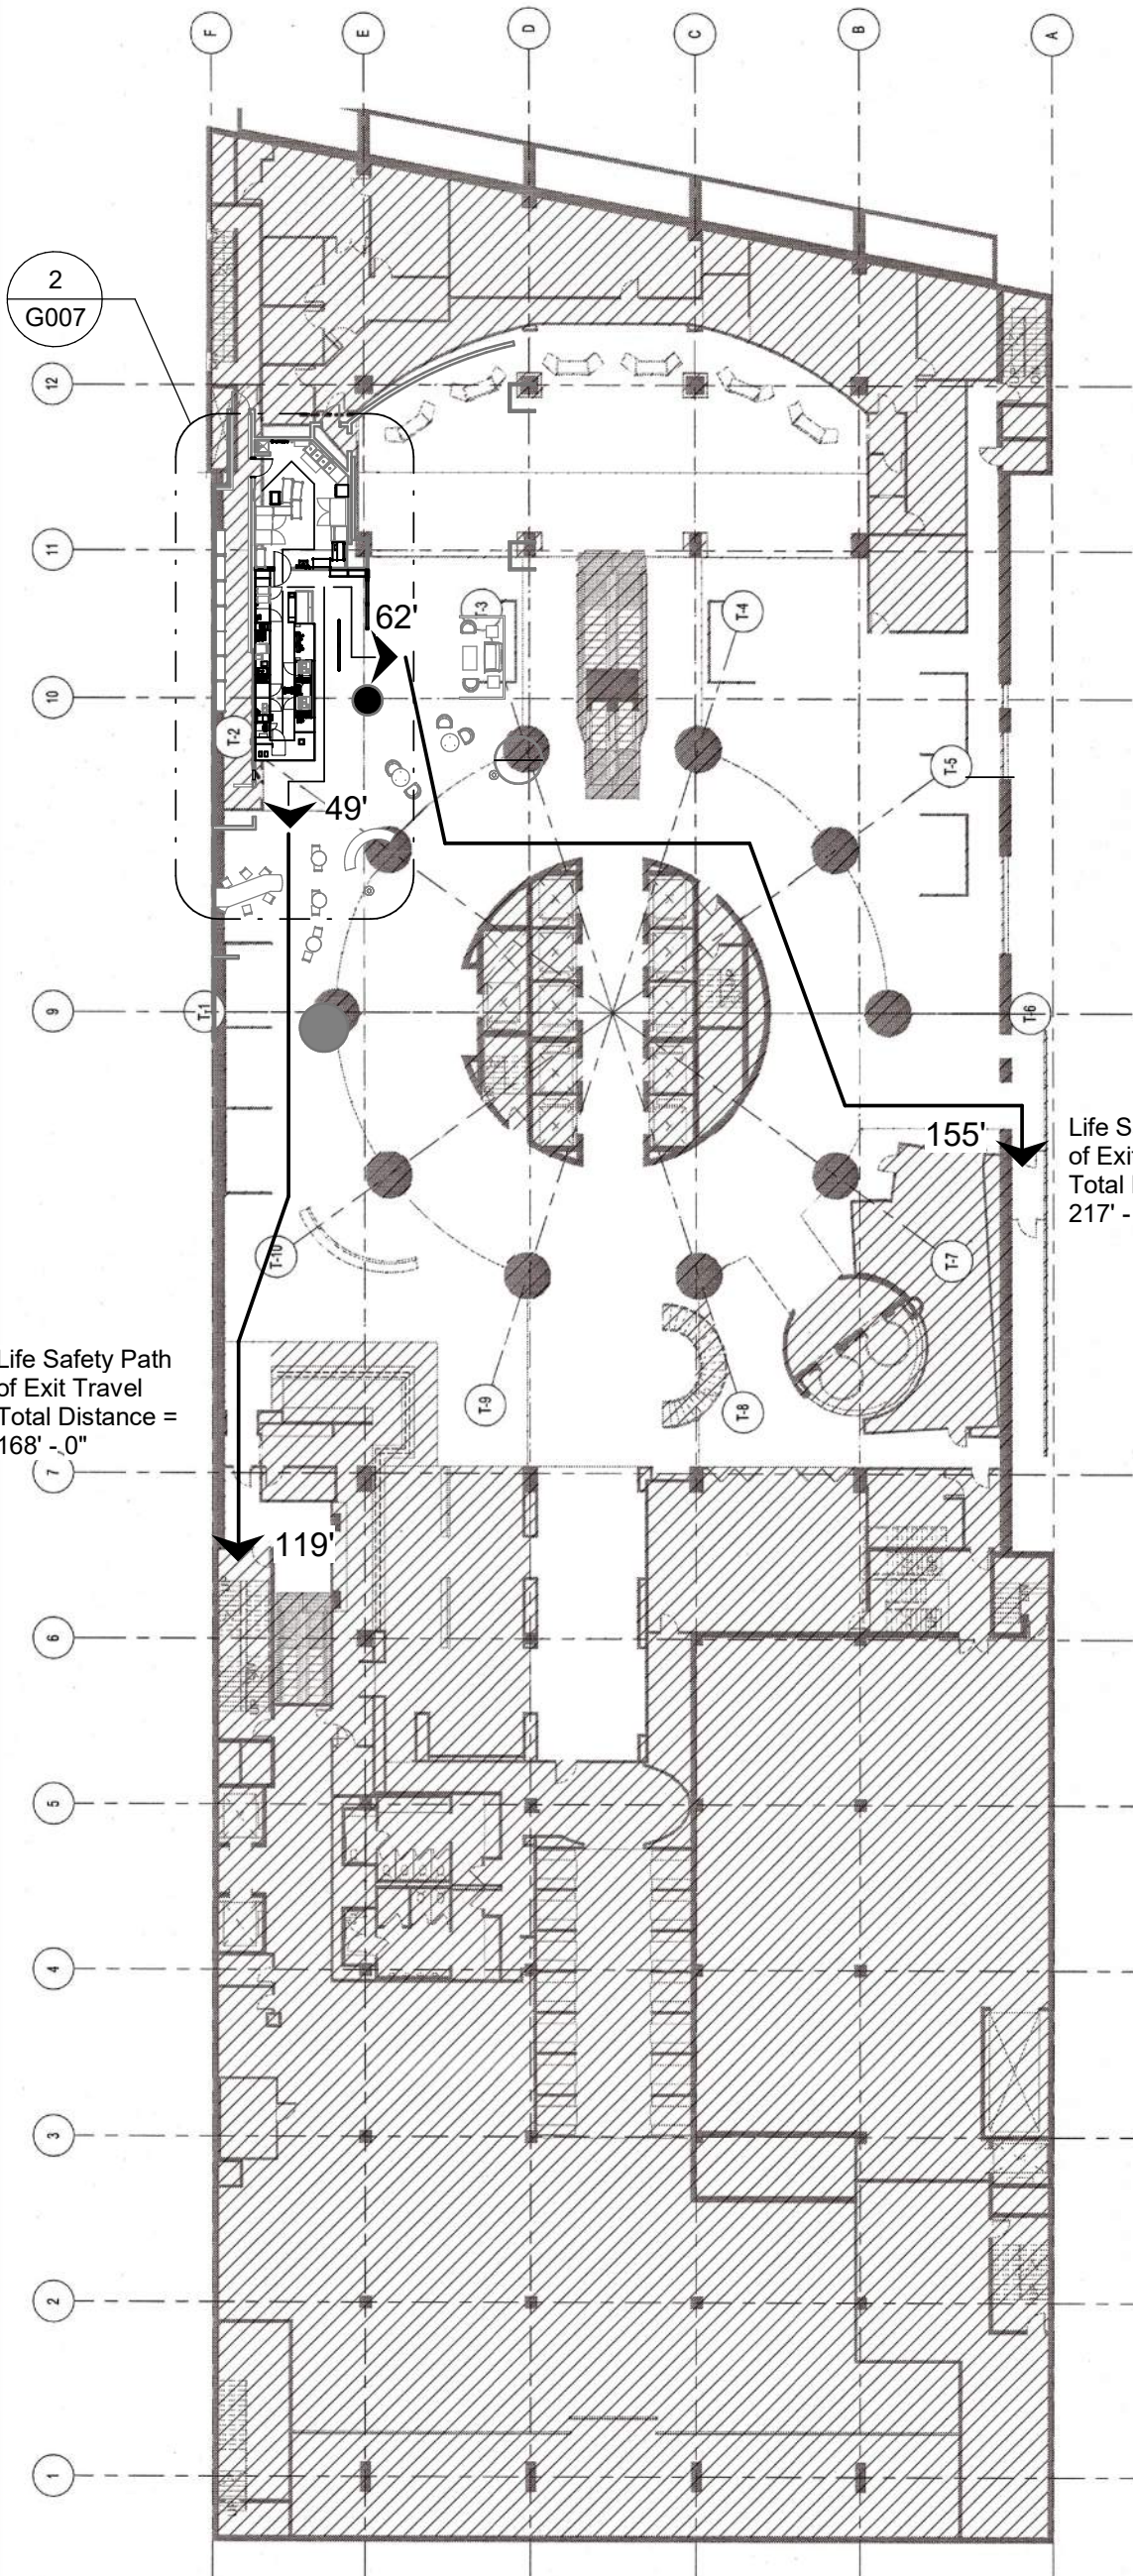

1 LIFE SAFETY PLAN
Scale: 1/32" = 1'-0"

BACKBAR / WORKROOM
BUSINESS OCCUPANCY
382 SF

EXIT ROUTE
EXIT ACCESS TRAVEL DIST =
62' - 0" (COMMON PATH OF TRAVEL)

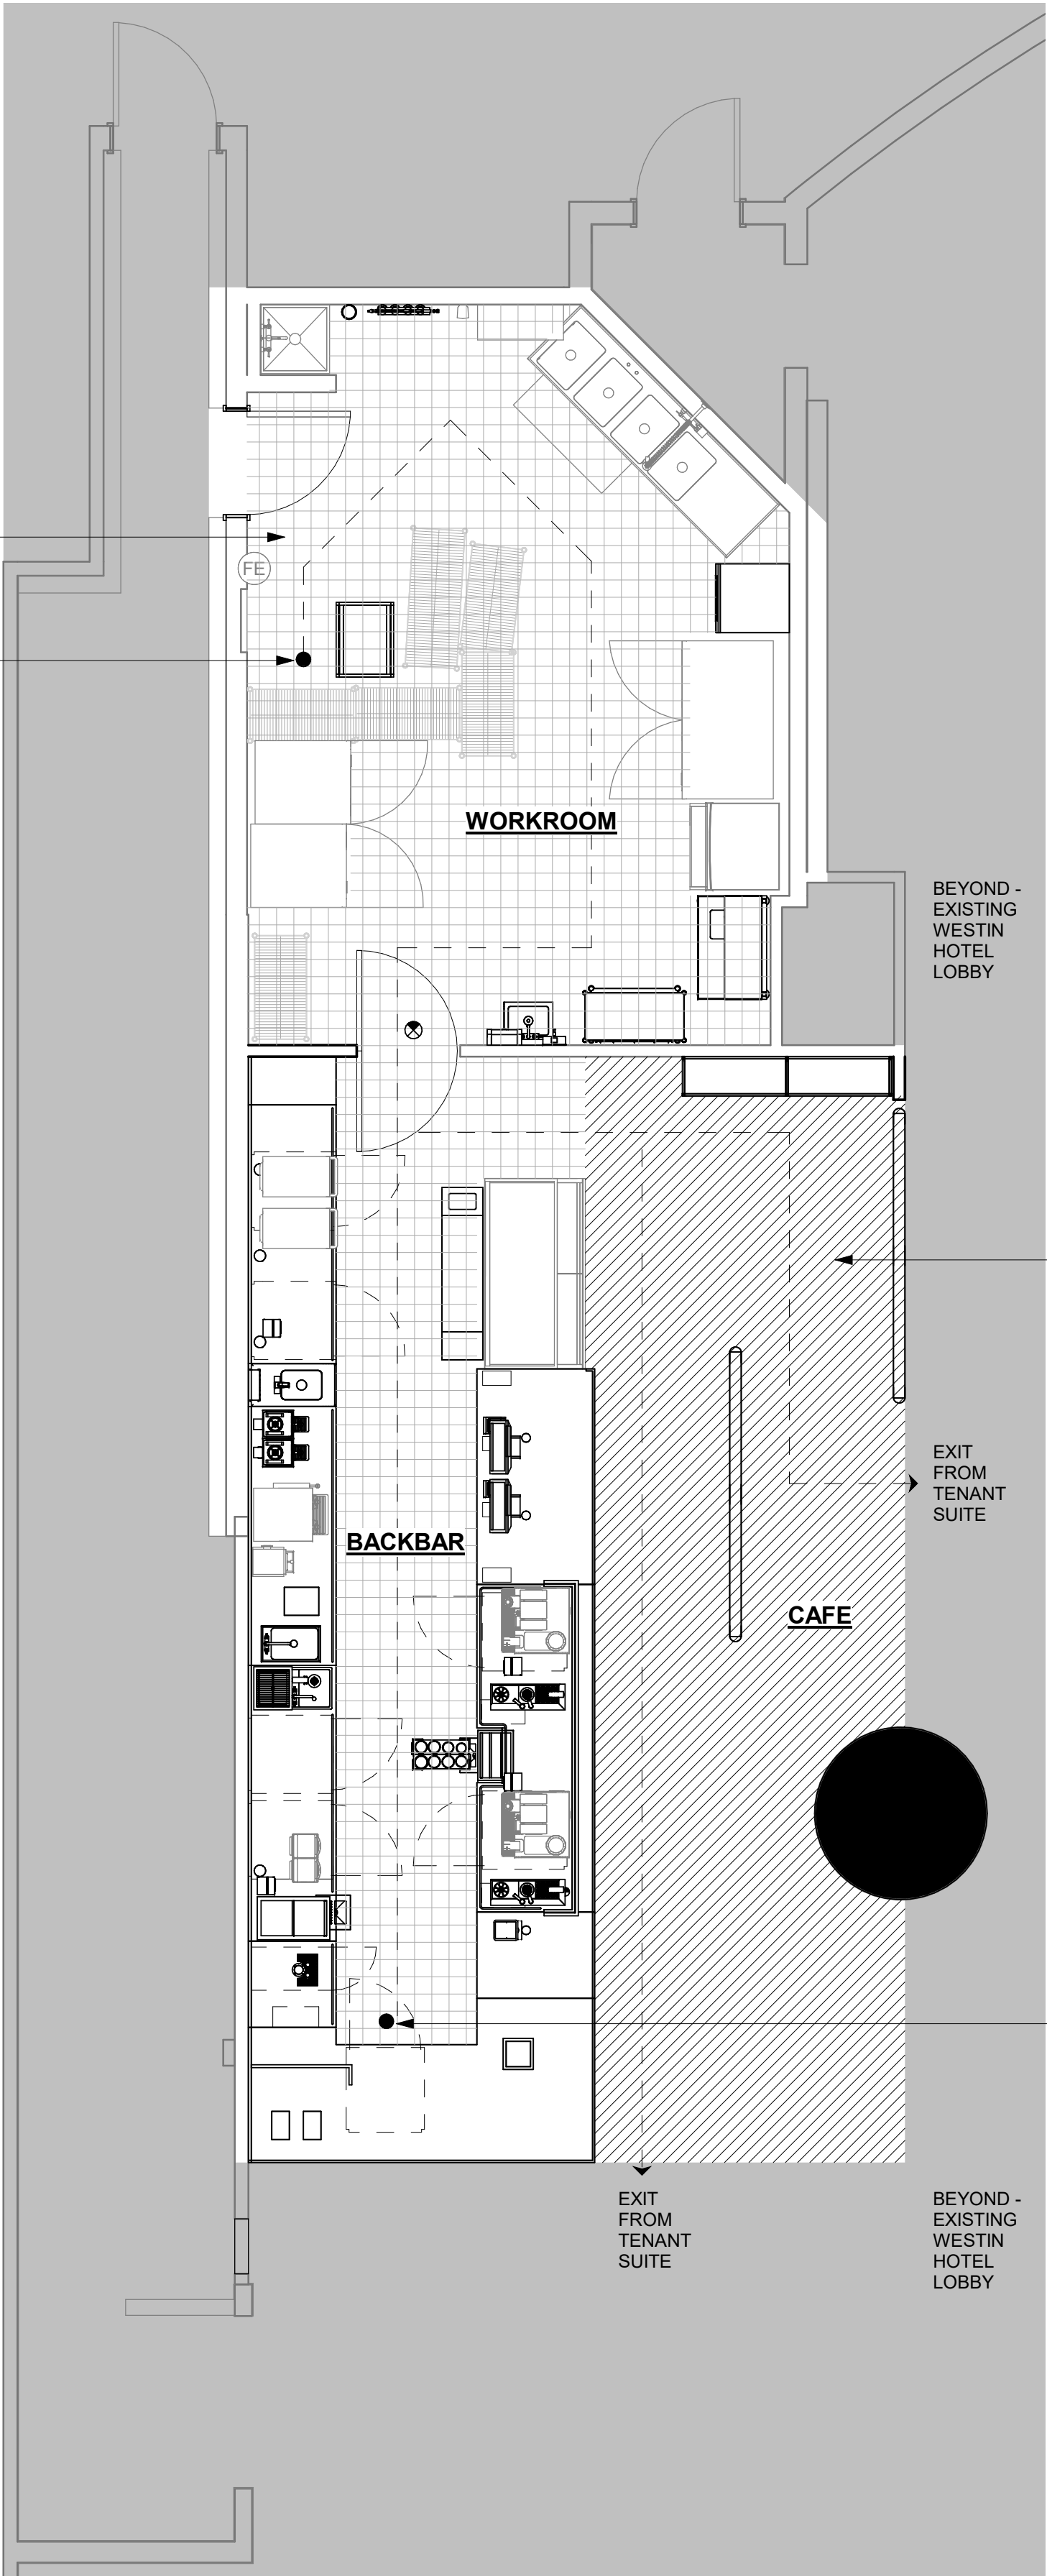

2 LIFE SAFETY PLAN
Scale: 1/4" = 1'-0"

Occupancy Load

Scope of Work Area:	
Project Square Footage:	Useable Area = 655 SF
Project Use and Classification:	Assembly Use (Sprinkled) Business Use (Sprinkled)
Scope of Work Occupancy:	
Assembly Use:	273 sf
Assembly Occupancy Load:	1 Person per 15 gsf = 19 Occupants
Business Use:	382 sf
Business Occupancy Load:	1 Person per 150 gsf = 3 Occupants
Scope of Work Occupant Load:	
22 Occupants	
Exits Capacity:	
Travel Distance:	2 Exits Provided (Scope of Work)
Common Path of Travel:	2 Exits Required (Scope of Work)
Exit Access Path of Travel:	100 Feet Allowed for Sprinklered Buildings 300 Feet Allowed for Sprinklered Buildings

General Notes

- 1) See cover sheets for more detailed building code information.
- The purpose of the fire and life safety drawings is to illustrate in schematic fashion, the applicable exiting, fire-resistance, and life safety concepts utilized by this project; including, but not limited to:
 - Occupancy classifications
 - Occupancy load factors
 - Exit locations, exit paths & capacity
 - Function of space
- 2) Additional detailed requirements apply to the construction of partitions, fire rated door assemblies, interior glazed. Openings, ducts, smoke and fire dampers and through penetration fire stopping. Refer to the drawings of each discipline and the project manual for these requirements, if applicable.
- 3) Additional detailed requirements shown elsewhere may require construction having greater fire ratings, more extensive fire-rated construction, or more complex assemblies than indicated. When provided, the additional detailed requirements shall govern.
- 4) Fire barriers shall extend from the top of the foundation or floor/ceiling assembly below to the underside of the floor or roof sheathing, slab or deck above and shall be securely attached thereto. Such fire barriers shall be continuous through concealed spaces.
- 5) Where applicable, shaft enclosures shall be constructed as fire barriers.
- 6) Where applicable, fire partitions shall extend from the top of the foundation or floor/ceiling assembly below to the underside of the floor or roof sheathing, slab or deck above or to the fire-resistance-rated floor/ceiling or roof/ceiling assembly above, and shall be securely attached thereto.
- 7) Where applicable, smoke barriers shall form an effective membrane continuous from outside wall to outside wall and from the top of the foundation or floor/ceiling assembly below to the underside of the floor or roof sheathing, deck or slab above, including continuity through concealed spaces.
- 8) Where applicable, smoke partitions shall extend from the top of the foundation or floor below to the underside of the floor or roof sheathing, deck or slab above or to the underside of the ceiling above where the ceiling membrane is constructed to limit the transfer of smoke.
- 9) Where applicable, directional signage shall be provided at each elevator landing and state the following: "in fire emergency, do not use the elevator. Use exit stairs."
- 10) Interior wall & ceiling finishes shall have a flame spread index rating of no more than class b at vertical exits & exit passageways and exit access corridors and other exit ways.
- 11) Interior wall & ceiling finishes shall have a flame spread index rating of no more than class c at rooms and enclosed spaces.
- 12) All materials exposed within ducts or plenums shall have a flame spread rating index not more than 25 and a smoke developed rating of not more than 50.
- 13) Fire extinguishers shall be located such that a maximum travel distance of 75' shall not be exceeded (where required by code).
- 14) Level/ area main occupancy exit sign locations may not be shown. Reference electrical sheets for all exit sign locations.
- 15) Fire resistive assembly details, if applicable, are located elsewhere in this drawing set per the sheet index.
- 16) Where applicable, elevator hoist way openings shall be protected as required by the code, corresponding to the rating of the hoist way.
- 17) Every assembly occupancy room or space shall have the occupant load posted in a conspicuous place.
- 18) Structural elements, fixtures or furnishings shall not project horizontally from either side more than 4 inches over any walking surface between 27 inches and 80 inches above the walking surface. Exception: handrails serving stairs and ramps are permitted to protrude 4 1/2 inches from the wall.
- 19) The path of egress travel exits and within exits in this building shall be identified by exit signs conforming to the requirements of section 1011 and as noted below:
 - a) exit signs shall be readily visible from any direction of egress travel.
 - b) exit signs shall be located as necessary to clearly indicate the direction of egress travel.
 - c) No point in a corridor shall be more than 100 ft or the listed viewing distance for the sign, whichever is less, from the nearest visible exit sign.
- 20) Egress doors or gates shall be operable from the egress side without the use of a key, special knowledge or effort. Door handles, pulls, latches, locks and other operating devices shall be installed 34 inches to 48 inches above finished floor. Manually operated flush bolts or surface bolts are not permitted. The unlatching of any door or leaf shall not require more than one operation.

WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303

No.	Date	Issue	By	Check
-----	------	-------	----	-------


Revisions

No.	Date	Revision	By	Check
-----	------	----------	----	-------

LIFE SAFETY &
ACCESSIBILITY PLAN

G007



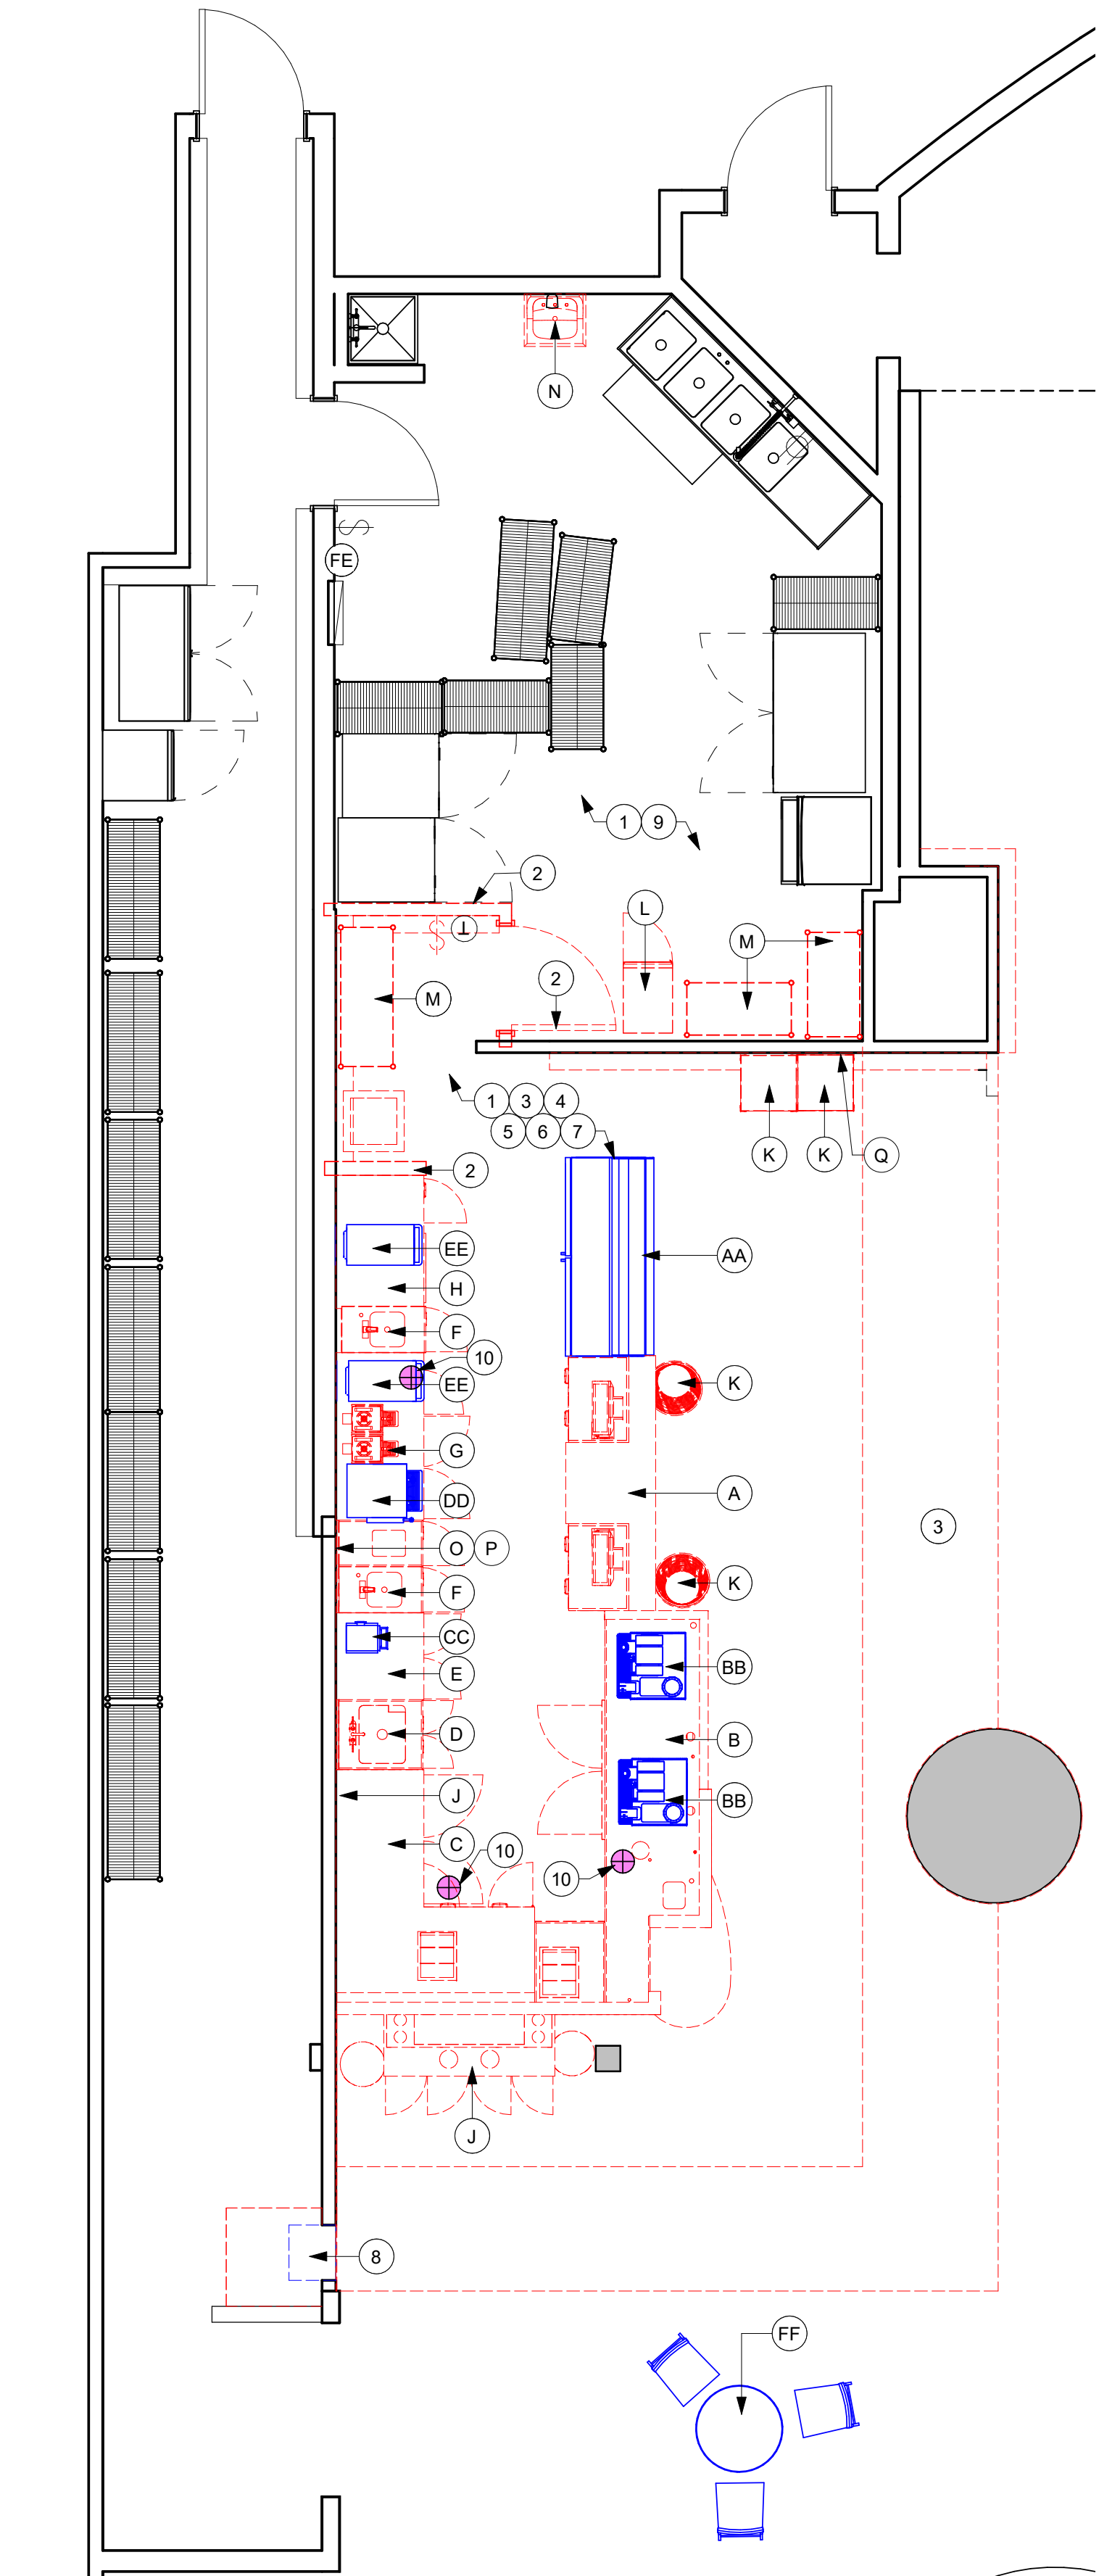

ITEMS TO DEMOLISH

- A. POS STATION
- B. ESPRESSO STATION, UON
- C. CBS STATION
- D. WORK SINK
- E. STORAGE CABINET
- F. HAND SINKS (3)
- G. BREW STATION, UON
- H. WARMING STATION, UON
- J. CONDIMENT CART
- K. ALL MERCH FIXTURES (4)
- L. FRIDGE
- M. METO RACKS (3)
- N. WORKROOM HAND SINK
- O. MENU BOARDS
- P. UPPER CABINETS
- Q. ARTWORK

ITEMS TO PRESERVE

- AA. FOOD CASE
- BB. MASTRENAS AND PUMP MOUNTS (2)
- CC. GRINDER
- DD. BREWER AND SHUTTLES (2)
- EE. WARMING OVENS (2)
- FF. CAFE FURNITURE

KEYED NOTES


- EXISTING WALLS AND DOORS TO REMAIN, THROUGHOUT SCOPE OF WORK, UNLESS OTHERWISE NOTED. GC TO PATCH, REPAIR, AND PREP AS REQUIRED TO PROVIDE A SMOOTH, PAINT READY SURFACE.
- REMOVE EXISTING WALLS AND DOORS AS INDICATED.
- REMOVE EXISTING FLOOR FINISHES THROUGHOUT SCOPE OF WORK, UNLESS OTHERWISE NOTED. REPAIR OR REPLACE SUB-FLOOR AS REQUIRED TO PROVIDE AN EVEN WALKING SURFACE AND FINISHED FLOOR CONDITION.
- REMOVE EXISTING WALL FINISHES THROUGHOUT SCOPE OF WORK, UNLESS OTHERWISE NOTED. PATCH, REPAIR, AND PREP SUBSTRATE TO RECEIVE NEW FINISH.
- REMOVE EXISTING CASEWORK, HANGING DEVICES, AND FASTENERS THROUGHOUT SCOPE OF WORK, UNLESS OTHERWISE NOTED. REMOVE ASSOCIATED ELECTRICAL AND DATA LINES NOT BEING RE-USED.
- REMOVE EXISTING PLUMBING FIXTURES THROUGHOUT SCOPE OF WORK, UNLESS OTHERWISE NOTED. CAP LINES AS NECESSARY FOR THOSE NOT BEING RE-USED.
- REMOVE EXISTING FIXTURES, FURNITURE, AND EQUIPMENT THROUGHOUT SCOPE OF WORK, UNLESS OTHERWISE NOTED. REFERENCE SCHEDULES ON THIS SHEET FOR ITEMS TO BE PRESERVED.
- REMOVE AND RELOCATE EXISTING MICROWAVE OUTSIDE STARBUCKS CAFE SPACE. LICENSEE TO PROVIDE GC DIRECTION ON NEW LOCATION. GC TO INFILL WALL AND PATCH AND REPAIR AS REQUIRED TO PREPARE FOR NEW WALL FINISHES.
- EXISTING WORKROOM EQUIPMENT AND FINISHES TO REMAIN, UNLESS OTHERWISE NOTED.
- SHOWN FOR REFERENCE - EXISTING FLOOR SINK OBSERVABLE IN FRONT OF HOUSE AREA. POSSIBLY TO BE RE-USED STILL UNDER CONSIDERATION.

GENERAL NOTES

- IF DURING DEMOLITION CONDITIONS ARE REVEALED THAT MAY JEOPARDIZE INTEGRITY OF STRUCTURE OR PRECLUDE FOLLOWING DESIGN INTENT, GENERAL CONTRACTOR TO IMMEDIATELY NOTIFY ARCHITECT OF RECORD AND STARBUCKS PROJECT DEVELOPMENT MANAGER.
- GENERAL CONTRACTOR IS RESPONSIBLE FOR SITE INVESTIGATION PRIOR TO DEMOLITION TO REVEAL FULL SCOPE OF WORK. NOTIFY ARCHITECT OF RECORD IF EXISTING CONDITIONS DEVIATE FROM CONSTRUCTION DOCUMENTS.
- REMOVE WALL COVERINGS ON EXISTING WALLS TO REMAIN THAT FACE AREAS OF DEMOLITION. REMOVAL SHALL INCLUDE ANY RESIDUAL MATERIAL AFTER DEMOLITION, I.E. PIECES OF WALL COVERING OR BACKING. REMOVAL OF ALL COVERINGS IS TO BE DONE TWO DAMAGING THE EXISTING WALL SURFACE TO REMAIN. ALSO REMOVE WALL DEVICES AND ITEMS MOUNTED TO WALLS.
- REMOVE ALL FLOOR MATERIALS INCLUSIVE OF SETTING BEDS, SUBFLOOR MATERIAL ETC. REMOVE MASTIC TO PROVIDE A CLEAN FLOOR THAT IS ACCEPTABLE TO THE SUBCONTRACTOR INSTALLING NEW FINISH MATERIAL.
- DEMOLITION PLANS REPRESENT APPROXIMATE LOCATION OF EXISTING WALLS TO BE DEMOLISHED. FIELD VERIFY TYPE OF CONSTRUCTION AND HEIGHT OF WALLS. PLANS DO NOT NECESSARILY INDICATE ALL DEMO WALLS, COUNTERS, HANDRAILS, WALL PROTECTION, CLOSETS, SINKS, ETC. PRIOR TO DEMOLITION, FIELD VERIFY THAT WALLS TO BE REMOVED DO NOT PROVIDE SUPPORT FOR EXISTING BUILDING ELEMENTS AND EXISTING CONSTRUCTION TO REMAIN. NOTIFY ARCHITECT OF RECORD IF DEMOLITION WALLS SUPPORT EXISTING BUILDING ELEMENTS.
- DEMOLISH AND REMOVE DOORS, VINYL BASE, CONDUIT, WIRING, DUPLEXES, DATA OUTLETS, CABLES, SHELVING, METAL STUD AND GYPSUM BOARD WALLS, CLOSETS, CABINETS, FILES, COUNTERS, WOOD MOLDING, SHELVES AND ENCLOSURES WHERE APPLICABLE.
- VERIFY ACCESS TO THE DEMOLITION AREA, INGRESS AND EGRESS ROUTES FOR MATERIAL AND EQUIPMENT WITH LICENSEE.
- PROTECT EXISTING FLOORS, WALLS AND CORNERS TO REMAIN ALONG WORK ACCESS ROUTES.
- CONTAIN DUST AND DEBRIS WITHIN THE DEMOLITION AREA.
- GENERAL CONTRACTOR SHALL PERFORM WORK IN A MANNER THAT DOES NOT DAMAGE THE EXISTING STRUCTURE. DEMOLITION SHALL NOT COMPROMISE THE STRUCTURAL INTEGRITY OF ANY WALLS, FLOORS, CEILINGS, SUPPORTS, STRUCTURE, ETC. TO REMAIN.
- ALL DEMOLITION MATERIALS AND DEBRIS SHALL BE DISPOSED OF ACCORDING TO FEDERAL, STATE AND LOCAL REGULATIONS.
- AT LOCATIONS WHERE EXISTING WALLS ARE TO BE REMOVED NEAR EXISTING WALLS TO REMAIN, PERFORM DEMOLITION WITHOUT DISTURBING EXISTING ELEMENTS TO REMAIN. WALLS TO REMAIN SHALL BE INTACT AND HAVE A NEAT SURFACE.
- REFER TO "ITEMS TO BE PRESERVED" LIST FOR ITEMS THAT SHALL BE SALVAGED FOR RELOCATION. VERIFY WITH LICENSEE FOR ON SITE STORAGE LOCATION OF SALVAGED ITEMS.
- DAMAGED FIREPROOFING SHALL BE REPAIRED/ REPLACED TO MATCH EXISTING OR AS PER CODE.
- THE GENERAL CONTRACTOR SHALL DEMOLISH ANY EXISTING ABANDONED VOICE/DATA CABLING AND DEAD OR NON-USE ELECTRICAL LINES BACK TO PANEL. ALL RECEPTACLES NOT RE-USED ARE TO BE REMOVED, PATCHED, AND PAINTED.
- REMOVAL OF LOW VOLTAGE EQUIPMENT PERTAINING TO DATA/COMMUNICATIONS AND TELEPHONE SHALL BE VERIFIED BY THE LICENSEE AND/OR ARCHITECT OF RECORD PRIOR TO REMOVAL.
- LABEL ALL EXISTING ITEMS THAT ARE TO BE PRESERVED AND PROPERLY STORED FOR RE-INSTALLATION.

LEGEND

- MATERIAL TO BE DEMOLISHED
- MATERIAL TO BE RELOCATED
- EXISTING WALL TO REMAIN
- EXISTING COLUMN TO REMAIN
- EXISTING FLOOR SINK



WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303


No.	Date	Issue	By	Check
-----	------	-------	----	-------

Revisions

No.	Date	Revision	By	Check
-----	------	----------	----	-------

DEMOLITION FLOOR
PLAN

D101

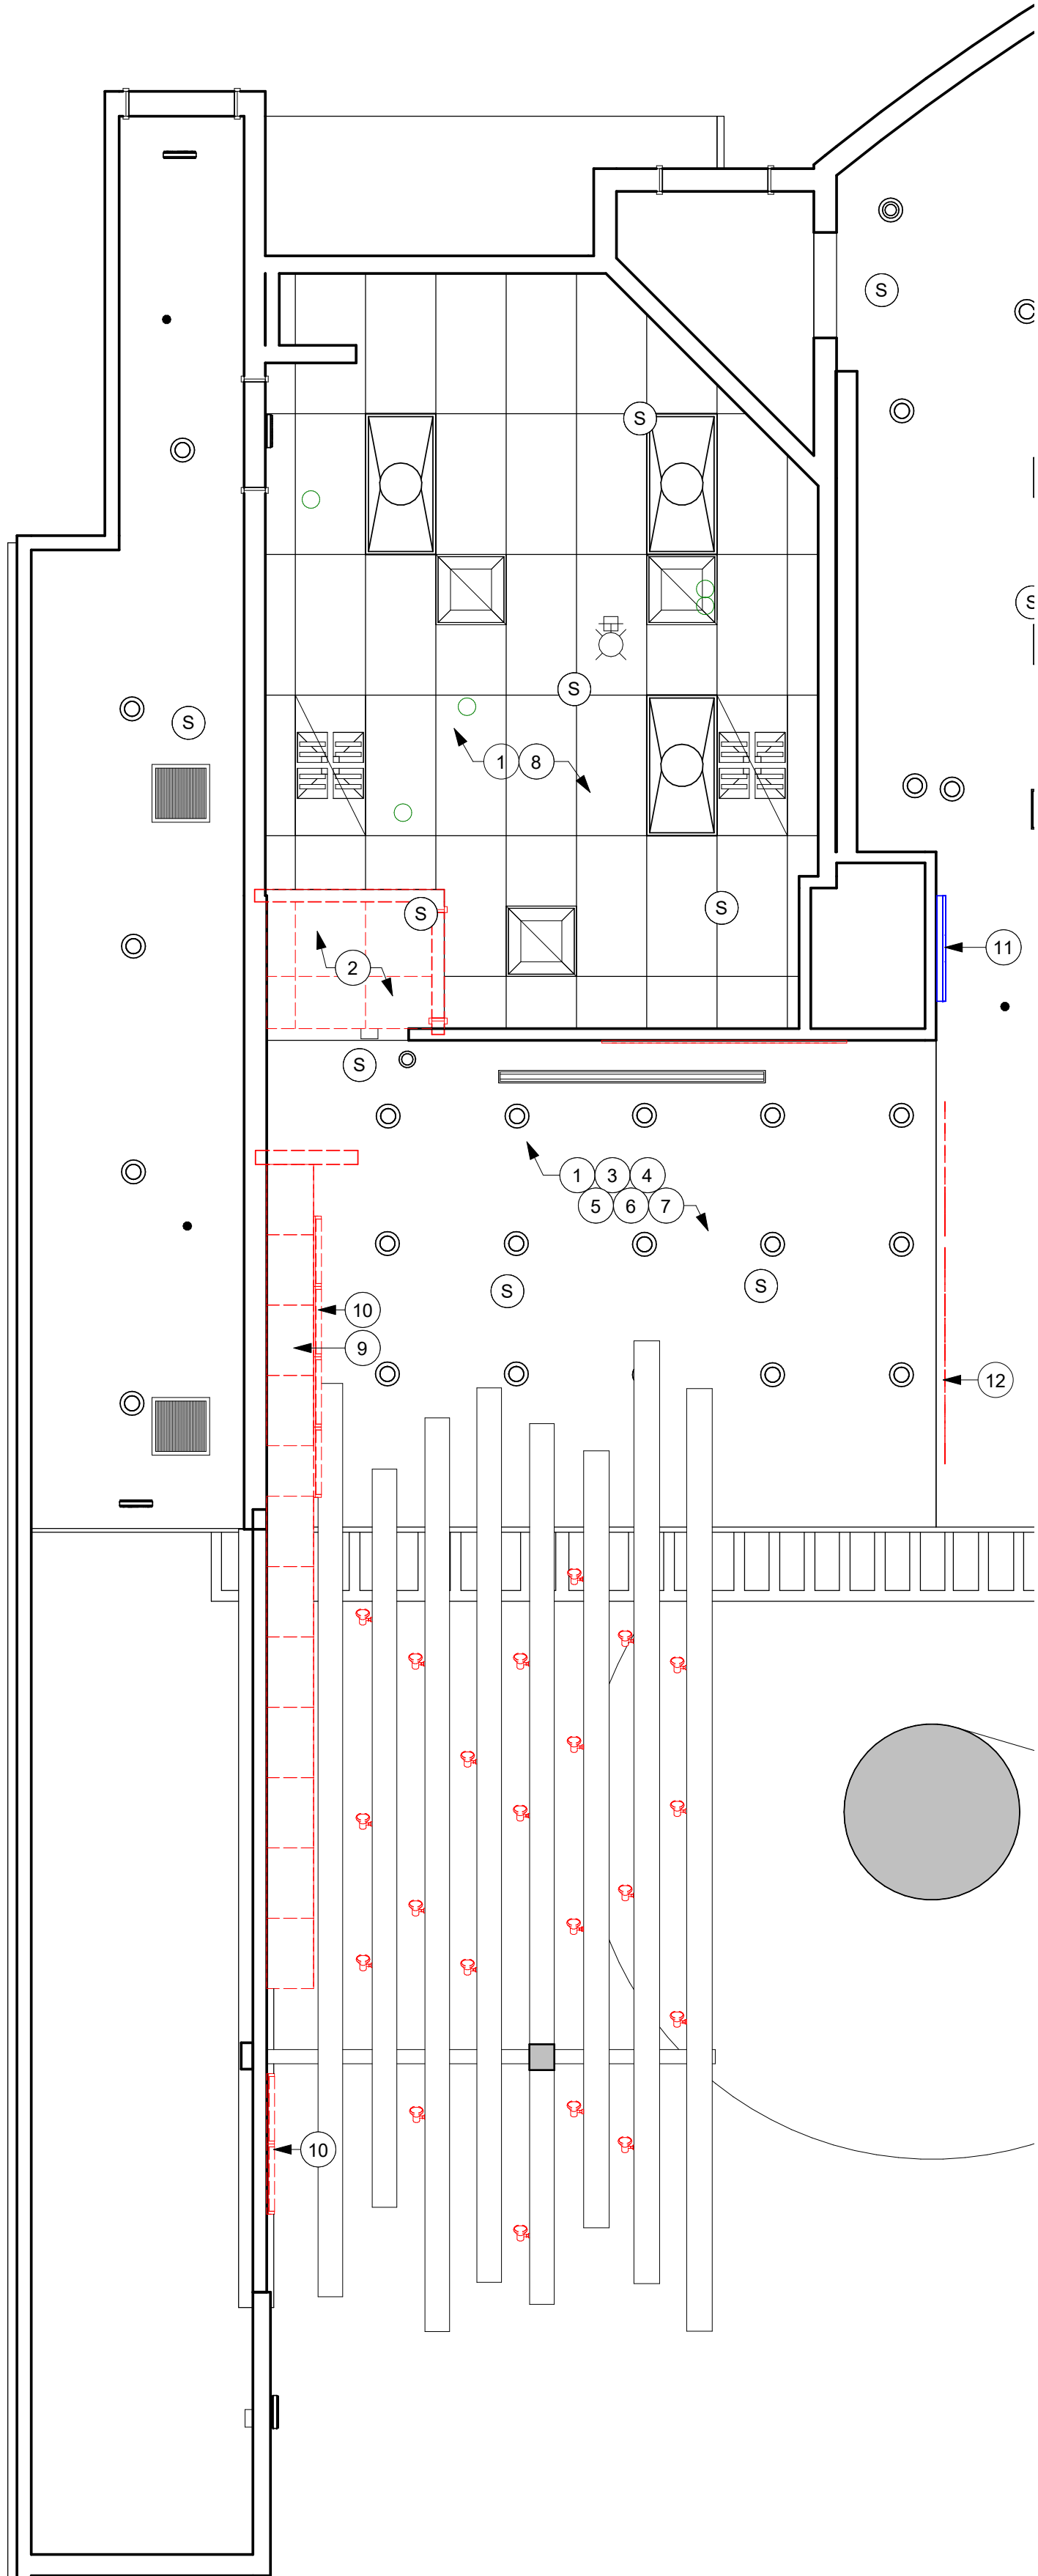

1 REFLECTED CEILING DEMOLITION PLAN

Scale: 1/4" = 1'-0"

KEYED NOTES

1. INDICATED EXISTING CEILING/SOFFIT TO REMAIN. GENERAL CONTRACTOR TO REPAIR AS REQUIRED.
2. REMOVE EXISTING HARD LID CEILING OR SOFFIT, FRAMING AND ASSOCIATED FASTENERS AS INDICATED IN PREPARATION FOR NEW.
3. REMOVE EXISTING LIGHT FIXTURES, ELECTRICAL WIRING, CONTROLS, AND ASSOCIATED FASTENERS THROUGHOUT SCOPE OF WORK, UNLESS OTHERWISE NOTED.
4. REMOVE ANY EXISTING SPEAKERS, SECURITY CAMERAS, LV CABLING AND ASSOCIATED CONDUITS.
5. REMOVE EXISTING EXTRANEIOUS EQUIPMENT AND FIXTURES AS NECESSARY.
6. ARCHITECT OF RECORD VERIFY EXISTING FIRE SPRINKLER LOCATIONS AND PROVIDE REVISED PLAN AS REQUIRED.
7. ARCHITECT OF RECORD TO VERIFY EXISTING HVAC EQUIPMENT TYPES AND LOCATIONS AND PROVIDE REVISED PLAN AS REQUIRED.
8. EXISTING WORKROOM LIGHTING TO REMAIN. GC TO PATCH AND REPAIR CEILING AS REQUIRED. MATCH EXISTING.
9. REMOVE EXISTING CUBBIES.
10. REMOVE EXISTING MENU BOARDS.
11. RELOCATE EXISTING LOGO DISK. GC TO PATCH AND REPAIR WALL AS REQUIRED.
12. DEMOLISH EXISING WORDMARK. GC TO PATCH AND REPAIR SOFFIT AS REQUIRED.

GENERAL NOTES

- A. IF DURING DEMOLITION CONDITIONS ARE REVEALED THAT MAY JEOPARDIZE INTEGRITY OF STRUCTURE OR PRECLUDE FOLLOWING DESIGN INTENT, GENERAL CONTRACTOR TO IMMEDIATELY NOTIFY ARCHITECT OF RECORD AND STARBUCKS PROJECT DEVELOPMENT MANAGER.
- B. GENERAL CONTRACTOR IS RESPONSIBLE FOR SITE INVESTIGATION PRIOR TO DEMOLITION TO REVEAL FULL SCOPE OF WORK. NOTIFY ARCHITECT OF RECORD IF EXISTING CONDITIONS DEVIATE FROM CONSTRUCTION DOCUMENTS.
- C. LABEL ALL EXISTING ITEMS THAT ARE TO BE PRESERVED AND PROPERLY STORED FOR RE-INSTALLATION.
- D. EXISTING SPRINKLERS TO REMAIN OPERATIONAL DURING CONSTRUCTION.
- E. DEMOLISH AND REMOVE EXISTING SUSPENDED ACOUSTIC LAY-IN, SPLINE OR GYPSUM/PLASTER CEILING INCLUSIVE OF HANGERS AND CARRYING CHANNELS, WIRES, CABLES, CONDUIT, ELECTRICAL BOXES, SMOKE DETECTORS, LIGHT FIXTURES AND WIRING, DUCTWORK, PIPING, AND SUPPORT HANGERS. CUT HANGERS FLUSH. SPACES RECEIVING WALL DEMOLITION WILL ALSO HAVE CEILING DEMOLITION, UNLESS NOTED OTHERWISE.

LEGEND

- MATERIAL TO BE DEMOLISHED
- MATERIAL TO BE RELOCATED
- EXISTING WALL TO REMAIN
- EXISTING COLUMN TO REMAIN
- EXISTING FLOOR SINK

WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303


No.	Date	Issue	By	Check
-----	------	-------	----	-------


Revisions

No.	Date	Revision	By	Check
-----	------	----------	----	-------

REFLECTED CEILING
DEMOLITION PLAN

D102



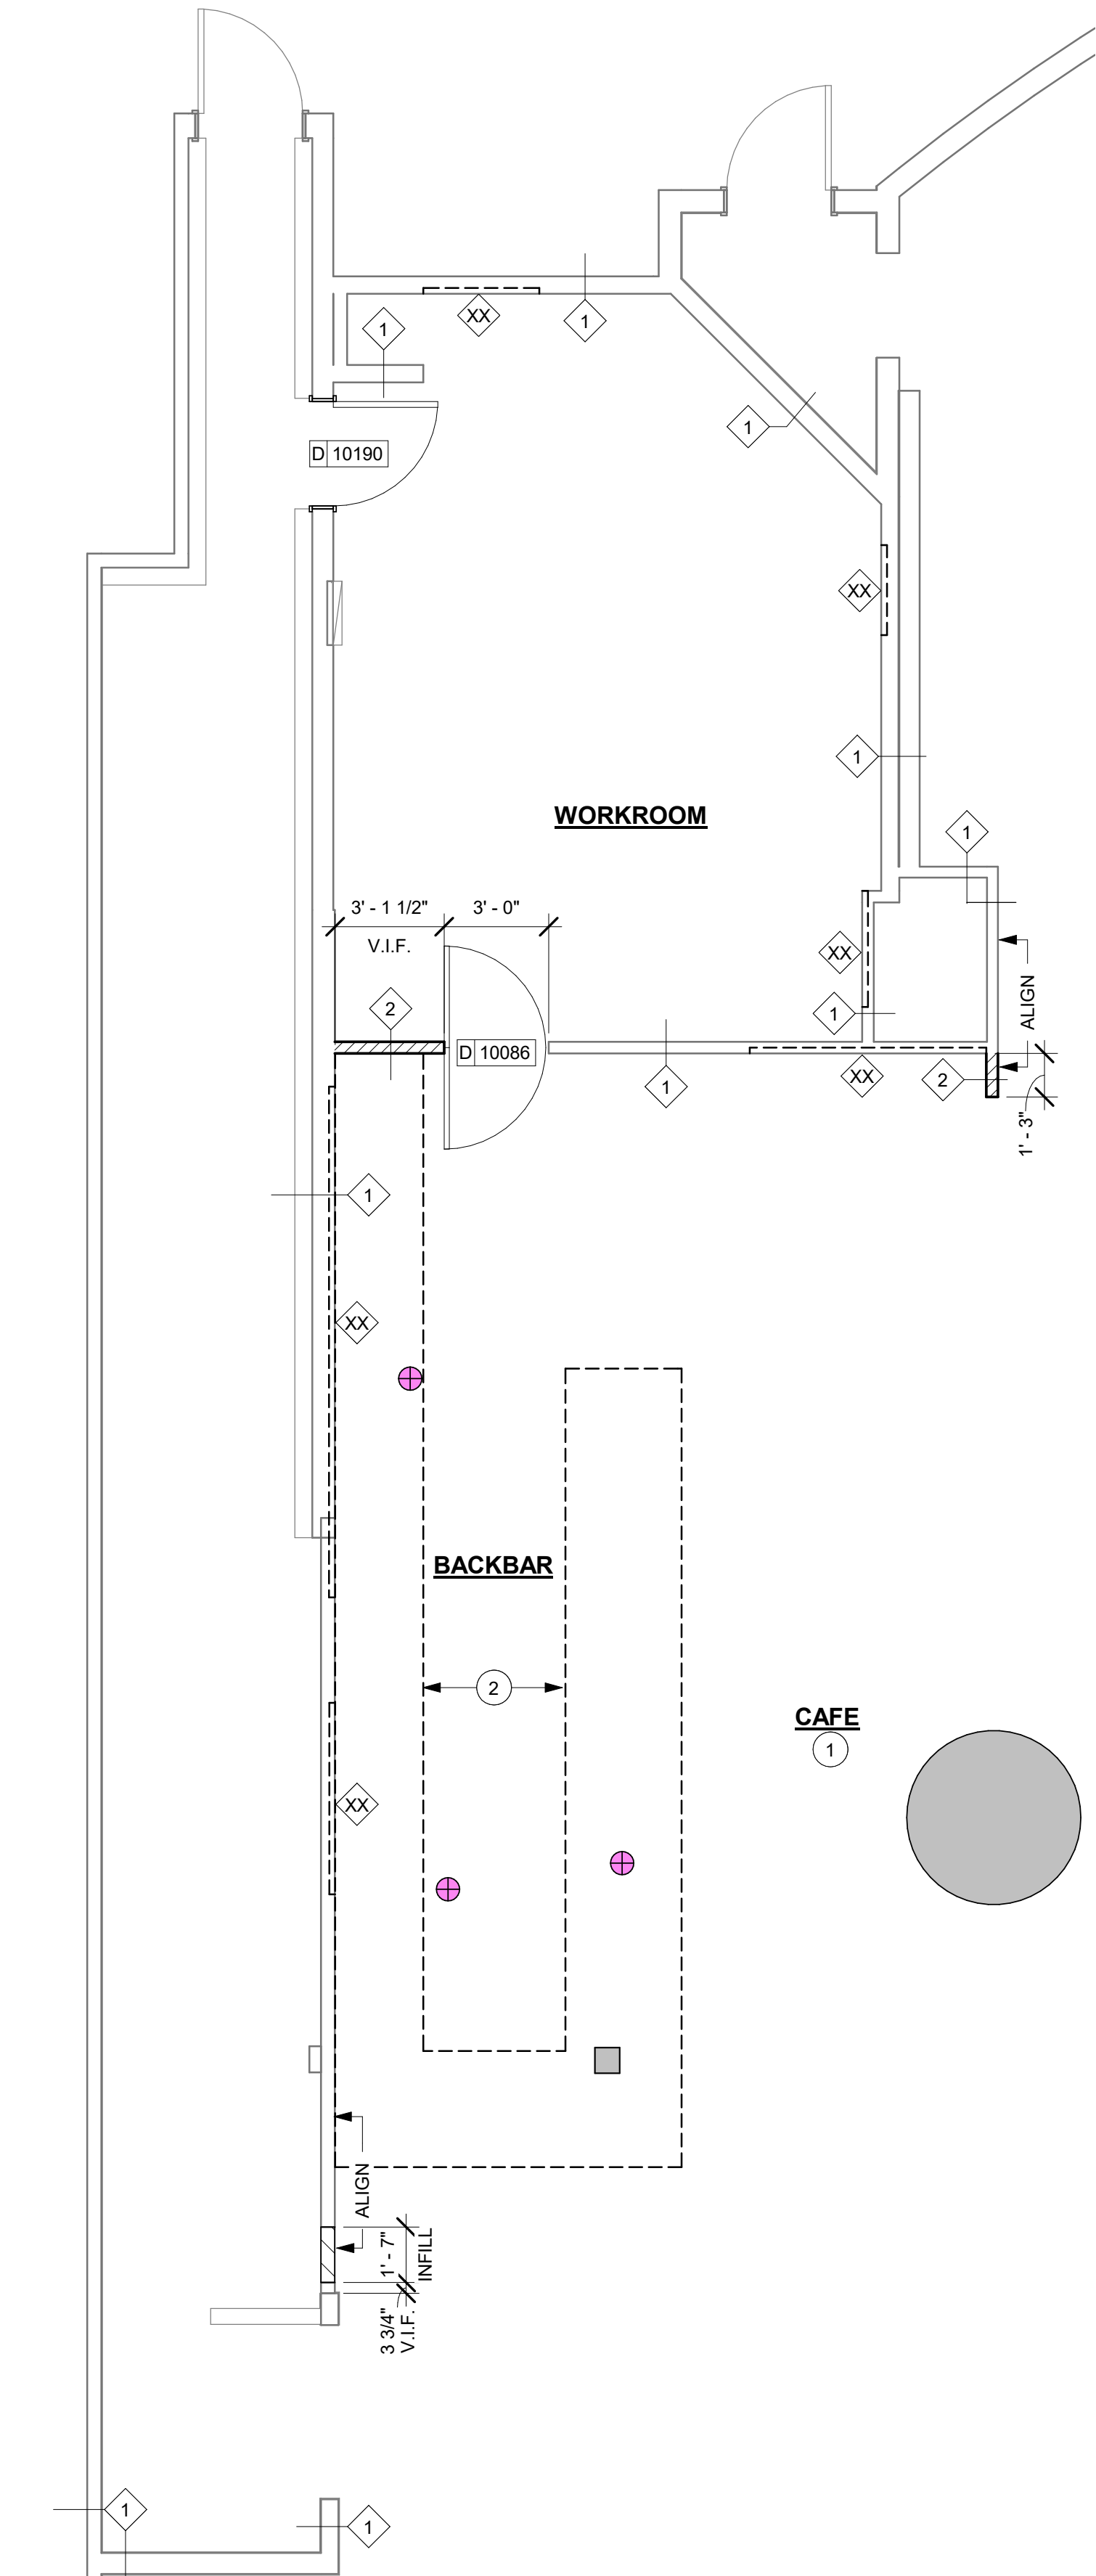


1 BUILDING FLOOR PLAN

Scale: 1/4" = 1'-0"

INTERIOR DOOR SCHEDULE - "D"					
DESIGN ID	COUNT	DESCRIPTION	FURN. BY	INST. BY	COMMENTS
DOOR					
10086	1	DOOR - SINGLE IMPACT DOUBLE ACTING - 36IN 915MM	GC	GC	ELIASON SCP-8 DOOR; FINISH: CUSTOM LAMINATE FINISH - WILSONART GREY1500-60
10190	1	EXISTING DOOR LOCATION - CHANGE SWING	EXISTING	GC	EXISTING DOOR - FLIP DOOR SWING DIRECTION IN EXISTING DOOR LOCATION

DOOR LEGEND




SINGLE
IMPACT
DOUBLE
ACTING

WALL TYPE LEGEND

1 EXISTING WALL

2 NEW PARTITION WALL TO 6" (152MM) ABOVE CEILING
20 GA 3-5/8" (86 MM) METAL STUDS 16" (406MM) O.C. WITH 5/8" (16 MM) TYPE "X" GWB ON ONE OR BOTH SIDES TO MINIMUM OF 6" (152 MM) ABOVE CEILING GRID. DRYWALL SCREWS @ 12" (305 MM) O.C., 45 DEGREES. METAL STUD REINFORCEMENT @ 48" (1219 MM) O.C. ABOVE CEILING LINE TO STRUCTURE ABOVE.



KEYED NOTES

1. INSTALL NEW WALLS AND DOORS AS INDICATED.
2. OUTLINE OF BAR PER CASEWORK MANUFACTURER.

GENERAL NOTES

- A. GENERAL CONTRACTOR TO VERIFY ALL DIMENSIONS AND NOTIFY ARCHITECT OF RECORD AND STARBUCKS DEVELOPMENT MANAGER OF ANY DISCREPANCIES PRIOR TO CONSTRUCTION. ALL DIMENSIONS TO BE TAKEN FROM DESIGNATED DATUM POINT.
- B. GENERAL CONTRACTOR TO PROVIDE FIRE TREATED WOOD STUD BLOCKING, OR EQUIVALENT, TO SUPPORT ANY WALL ATTACHMENT AND/OR SIGNAGE.
- C. IF EXISTING EXTERIOR ENTRANCE THRESHOLD EXCEEDS MINIMUM BARRIER FREE PROVISIONS OF THE CODE, REMOVE AND REPLACE WITH ACCESSIBLE THRESHOLD. RAISED THRESHOLDS AND FLOOR LEVEL CHANGES AT ACCESSIBLE DOORWAYS TO BE BEVELED WITH A SLOPE NO GREATER THAN 1:12.
- D. ALL DIMENSIONS ARE TO FINISHED FACE UNLESS SHOWN OR NOTED OTHERWISE.
- E. INSTALL MOISTURE RESISTANT BACKBAR WALL BOARD PER PROJECT MANUAL.
- F. ALL DOORS SHALL BE 32" (815MM) MINIMUM CLEAR OPENING WHEN OPENED TO 90 DEGREE POSITION UNLESS NOTED OTHERWISE.
- G. ARCHITECT OF RECORD TO SPECIFY ALL DOOR HARDWARE COMPONENTS. GENERAL CONTRACTOR TO FURNISH AND INSTALL.
- H. ARCHITECT OF RECORD TO VERIFY ALL EXISTING DOORS, HARDWARE, AND FRAMES MEET STARBUCKS AND/OR CODE REQUIREMENTS.
- I. GENERAL CONTRACTOR TO FURNISH AND INSTALL FIRE EXTINGUISHER(S) AS REQUIRED PER CODE.
- J. ARCHITECT OF RECORD TO VERIFY ALL WALL TYPES.
- K. GENERAL CONTRACTOR TO FURNISH AND INSTALL NEW STUD FURRING AND GWB AS REQUIRED. ARCHITECT OF RECORD TO VERIFY AND COORDINATE FOR REQUIRED FIRE RATINGS AND SOUND INSULATION CRITERIA.
- L. EGRESS SHALL NOT PASS THROUGH KITCHENS, STORAGE ROOMS, CLOSETS, OR SIMILAR SPACES.
- M. REFER TO SHEET H105 FOR FLOOR FINISHES


LEGEND

- NEW FULL HEIGHT WALL
- EXISTING WALL
- EXISTING COLUMN
- WALL BLOCKING CALL OUT
- EXISTING FLOOR SINK

**LICENSED STORES
RESPONSIBILITY LEGEND**


- SB - STARBUCKS
- FC - STARBUCKS FIXTURE CONTRACTOR
- LC - LICENSEE
- GC - LICENSEE'S GENERAL CONTRACTOR


GENERAL CONTRACTOR TO FIELD VERIFY ALL DIMENSIONS AND COORDINATE AS NECESSARY WITH ARCHITECT OF RECORD




BUILDING FLOOR
PLAN & DOOR
SCHEDULE

A101



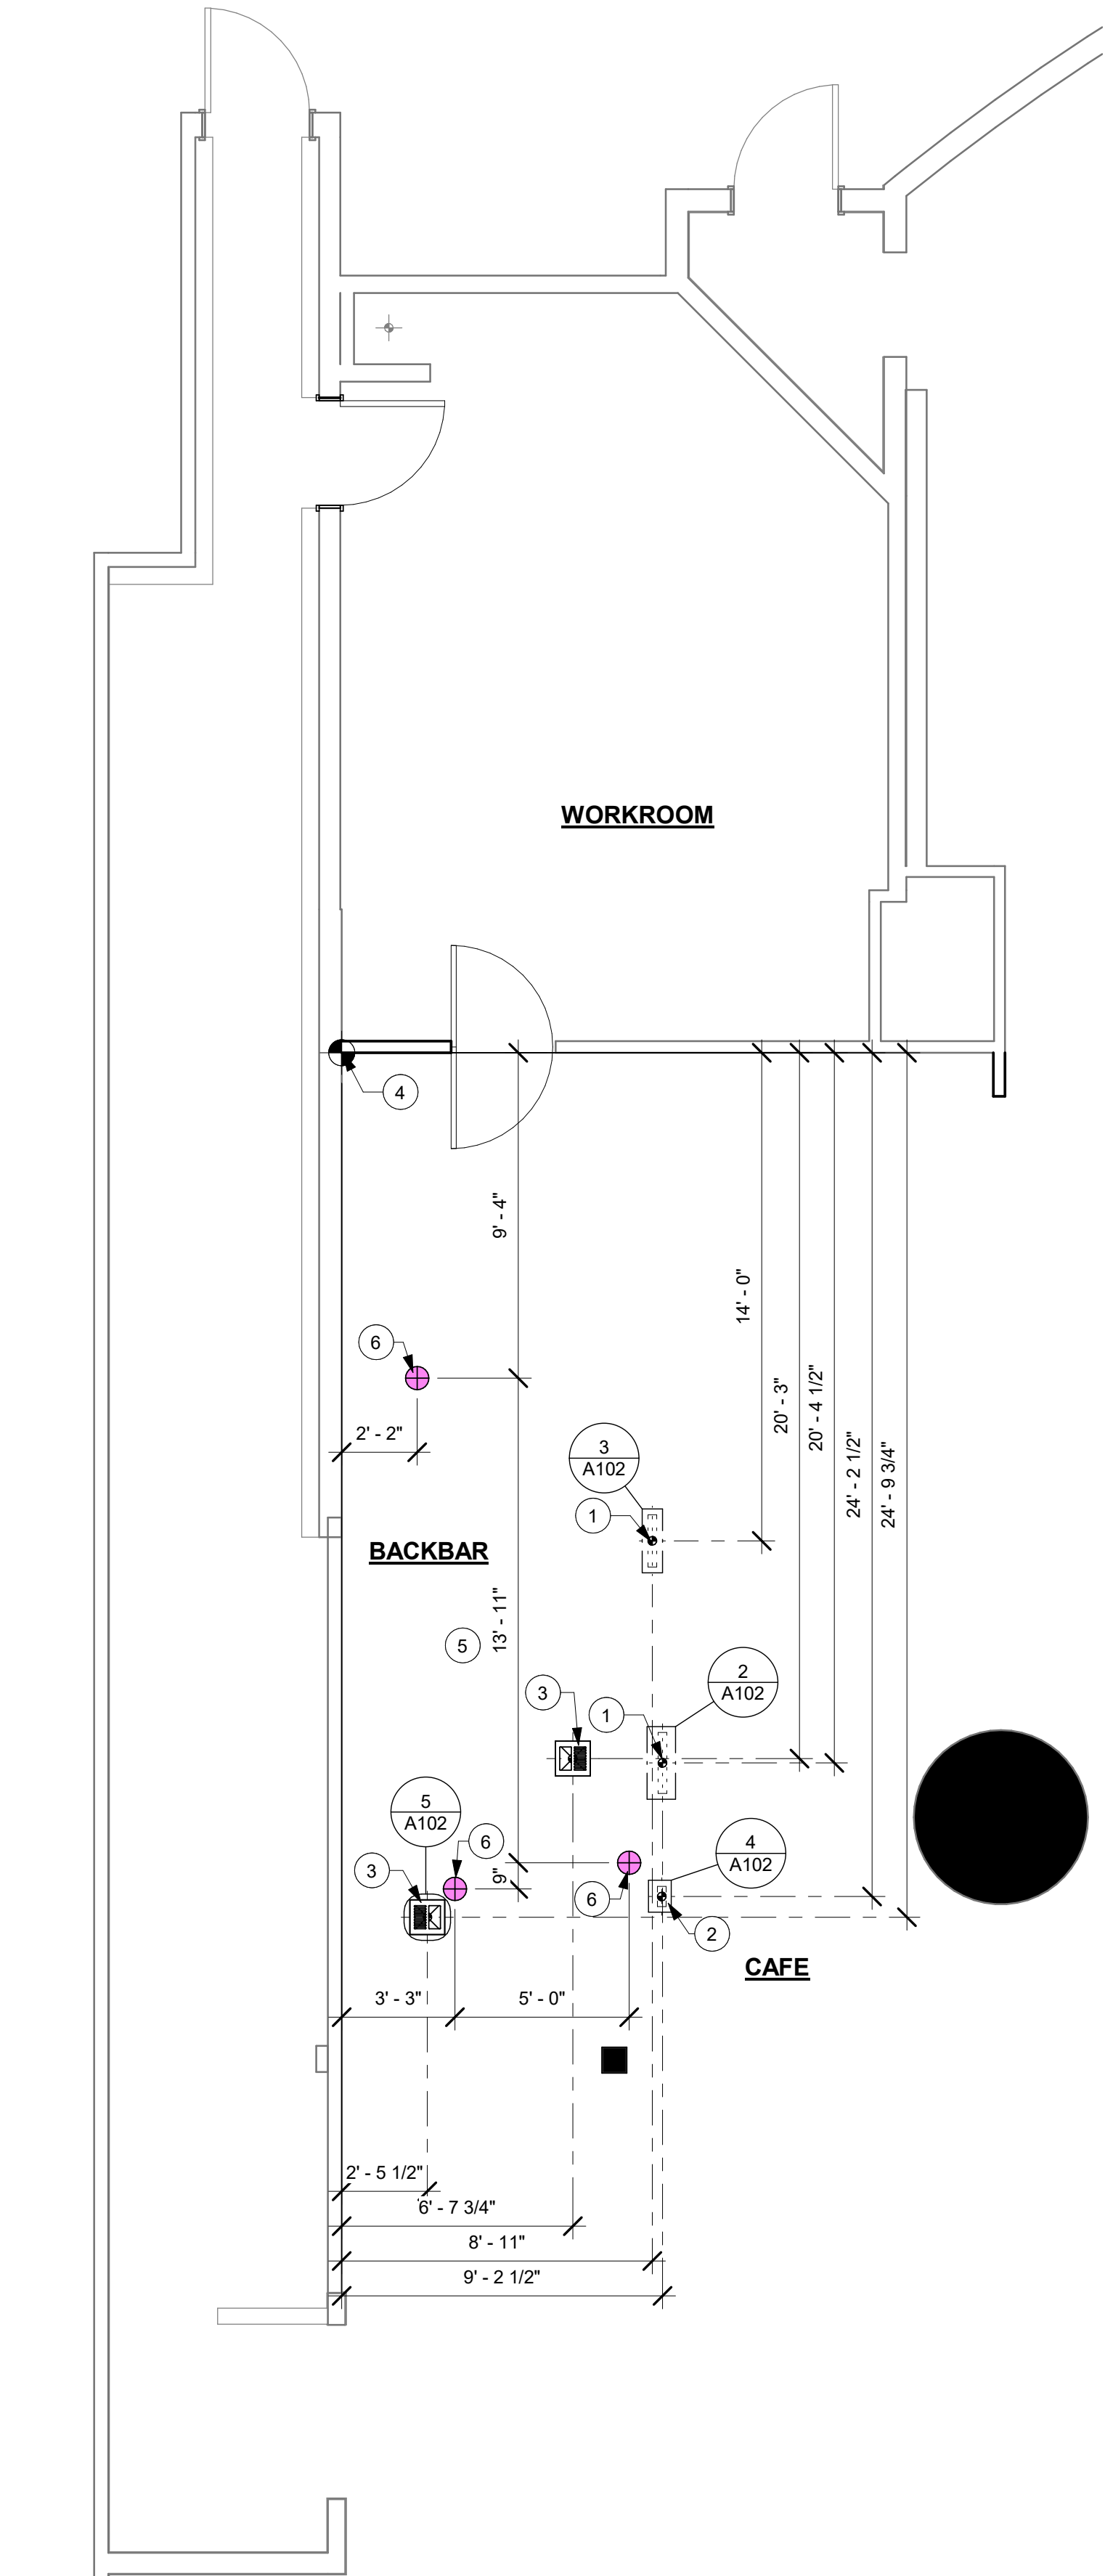


1 BUILDING FLOOR PENETRATION PLAN
Scale: 1/4" = 1'-0"

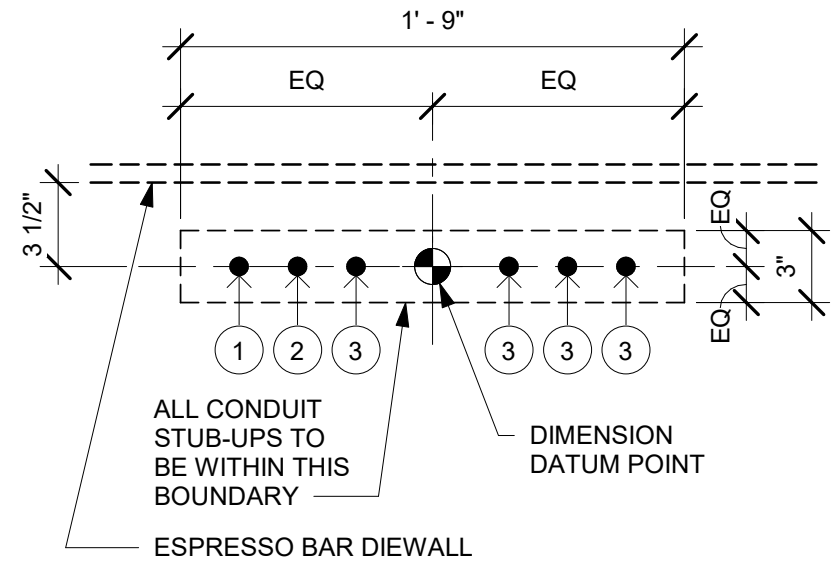

ESPRESSO BAR ELECTRICAL STUB-UP KEY	
1	3/4" LAN CONDUIT
2	3/4" LAN CONDUIT TO MANAGER'S WORKSTATION
3	3/4" ISOLATED GROUND POWER CONDUIT

NOTE: SEE SHEET A102 - BUILDING FLOOR PENETRATION PLAN FOR FINAL DIMENSIONED LOCATION.


2 ELECTRICAL STUB-UPS AT ESPRESSO BAR
Scale: 1 1/2" = 1'-0"

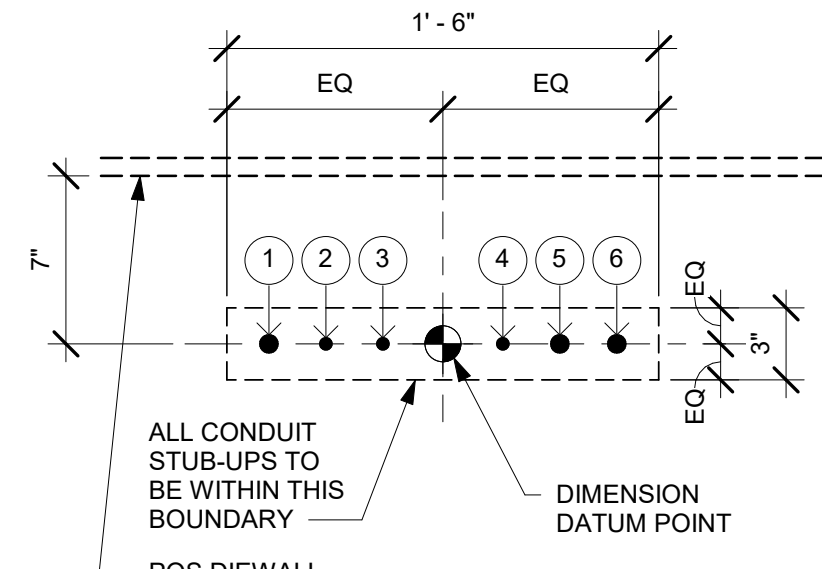

POS ELECTRICAL STUB-UP KEY	
1	3/4" POWER CONDUIT TO ELECTRICAL PANEL
2	1/2" PHONE TO MANAGER'S DESK
3	1/2" DATA CONDUIT TO MANAGER'S DESK
4	1/2" SECURITY TO MANAGER'S DESK
5	3/4" LAN CONDUIT TO POS/SAFE
6	3/4" POWER CONDUIT FOR PASTRY CASE

NOTE: SEE SHEET A102 - BUILDING FLOOR PENETRATION PLAN FOR FINAL DIMENSIONED LOCATION.


3 ELECTRICAL STUB-UPS AT POS
Scale: 1 1/2" = 1'-0"

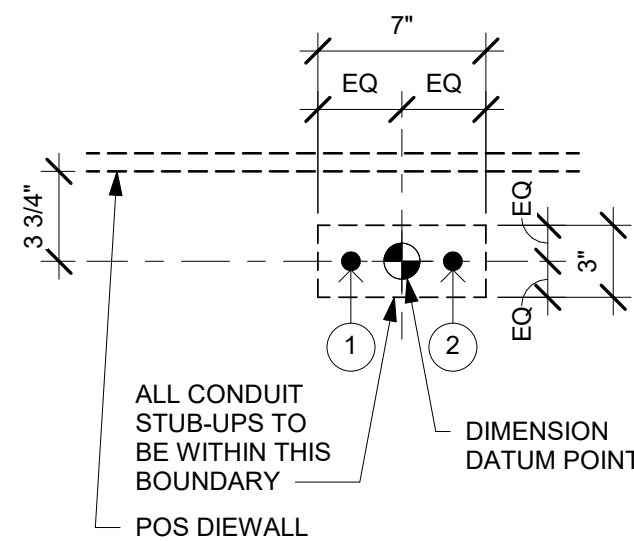

ESPRESSO BAR PLUMBING STUB-UP KEY	
1	CWF STUB-UP
2	CW STUB-UP

NOTE: SEE SHEET A102 - BUILDING FLOOR PENETRATION PLAN FOR FINAL DIMENSIONED LOCATION.

4 PLUMBING STUB-UPS AT ESPRESSO BAR
Scale: 1 1/2" = 1'-0"

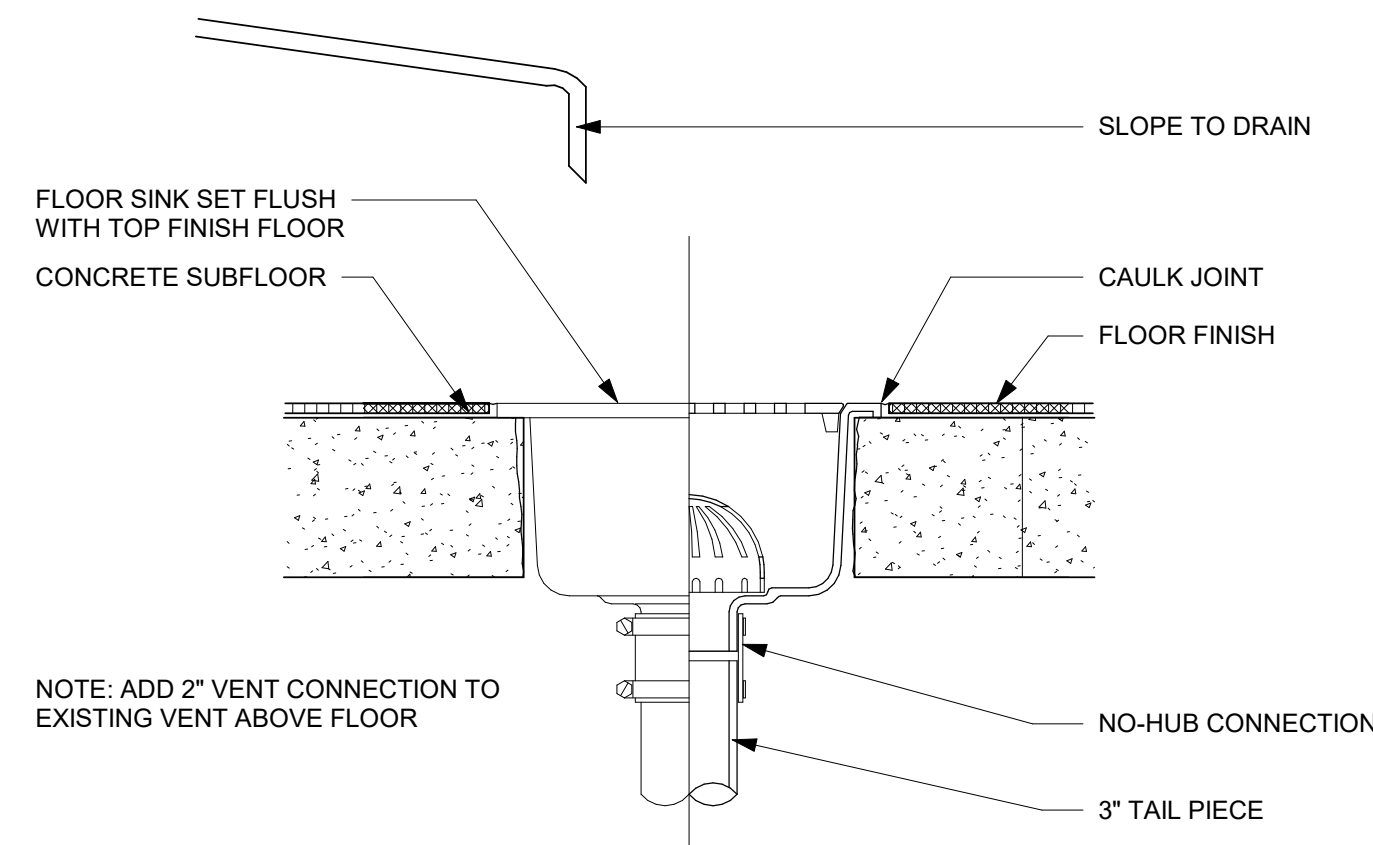

5 FLOOR SINK DETAIL
Scale: 3" = 1'-0"

KEYED NOTES

- ELECTRICAL STUB-UP LOCATION. REFER TO ELECTRICAL PLAN AND DETAILS FOR MORE INFORMATION.
- PLUMBING STUB-UP LOCATION. REFER TO PLUMBING PLAN AND DETAILS FOR MORE INFORMATION.
- FLOOR SINK LOCATION. REFER TO PLUMBING PLAN AND DETAILS FOR MORE INFORMATION.
- DATUM INDICATES DIMENSION START POINT.
- GC TO CONFIRM LOCATIONS OF EXISTING FLOOR PENETRATIONS AND REUSE WHERE POSSIBLE.
- SHOWN FOR REFERENCE - EXISTING FLOOR SINK OBSERVABLE IN FRONT OF HOUSE AREA. POSSIBLY TO BE RE-USED STILL UNDER CONSIDERATION. COREING FOR NEW LOCATIONS TO BE DONE ONLY AFTER FIELD VERIFICATIONS TO LOCATE REINFORCEMENT LOCATIONS AND EVALUATION OF IMPACT TO BEAM BY STRUCTURAL ENGINEER.

GENERAL NOTES

- GENERAL CONTRACTOR TO FIELD VERIFY ALL DIMENSIONS AND NOTIFY ARCHITECT OF RECORD AND STARBUCKS PROJECT DEVELOPMENT MANAGER OF ANY KNOWN DISCREPANCIES PRIOR TO CONSTRUCTION.
- ALL STUB-UP DIMENSIONS ARE RELATIVE TO FINISHED WALL LOCATIONS (SHOWN AS OUTLINES ON THIS PLAN). REFER TO BUILDING FLOOR PLAN FOR WALL PLACEMENT.
- GENERAL CONTRACTOR TO COORDINATE WITH SPECIFIC TRADES AND SITE CONDITIONS TO DETERMINE ACTUAL TRENCHING LAYOUT AS REQUIRED.
- REFER TO SHEET I105 FOR FLOOR FINISHES.

PENETRATION SYMBOL LEGEND

- FLOOR SINK
- FLOOR PENETRATION
- PLUMBING PENETRATION AREA
- ELECTRICAL PENETRATION AREA
- DATUM POINT
- COLUMN
- EXISTING FLOOR SINK

WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303


No.	Date	Issue	By	Check
-----	------	-------	----	-------

Revisions

No.	Date	Revision	By	Check
-----	------	----------	----	-------


BUILDING FLOOR
PENETRATION PLAN

A102

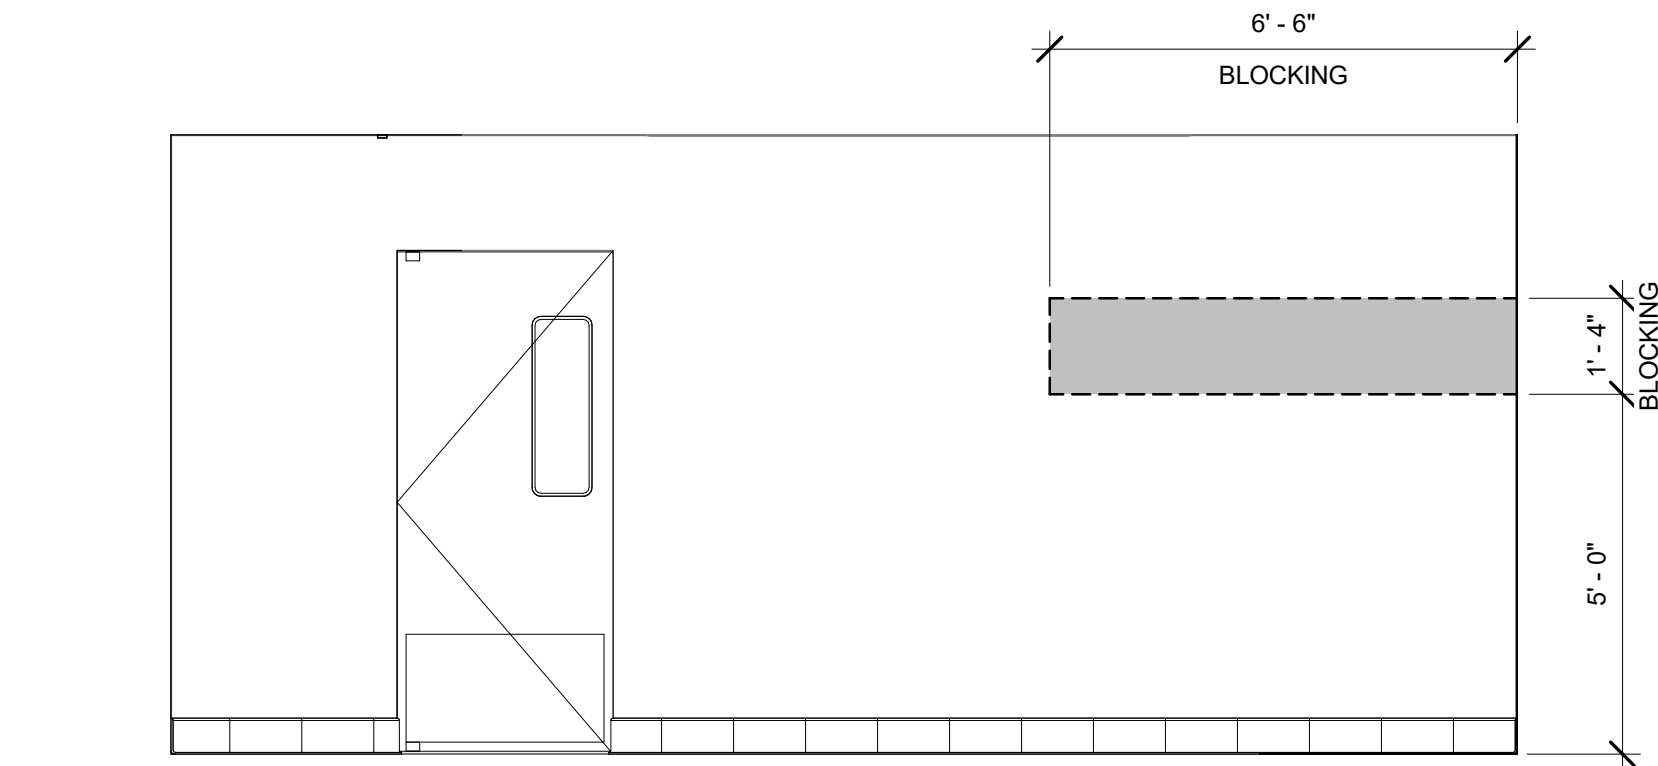


1 CAFE NORTH BLOCKING ELEVATION

Scale: 3/8" = 1'-0"

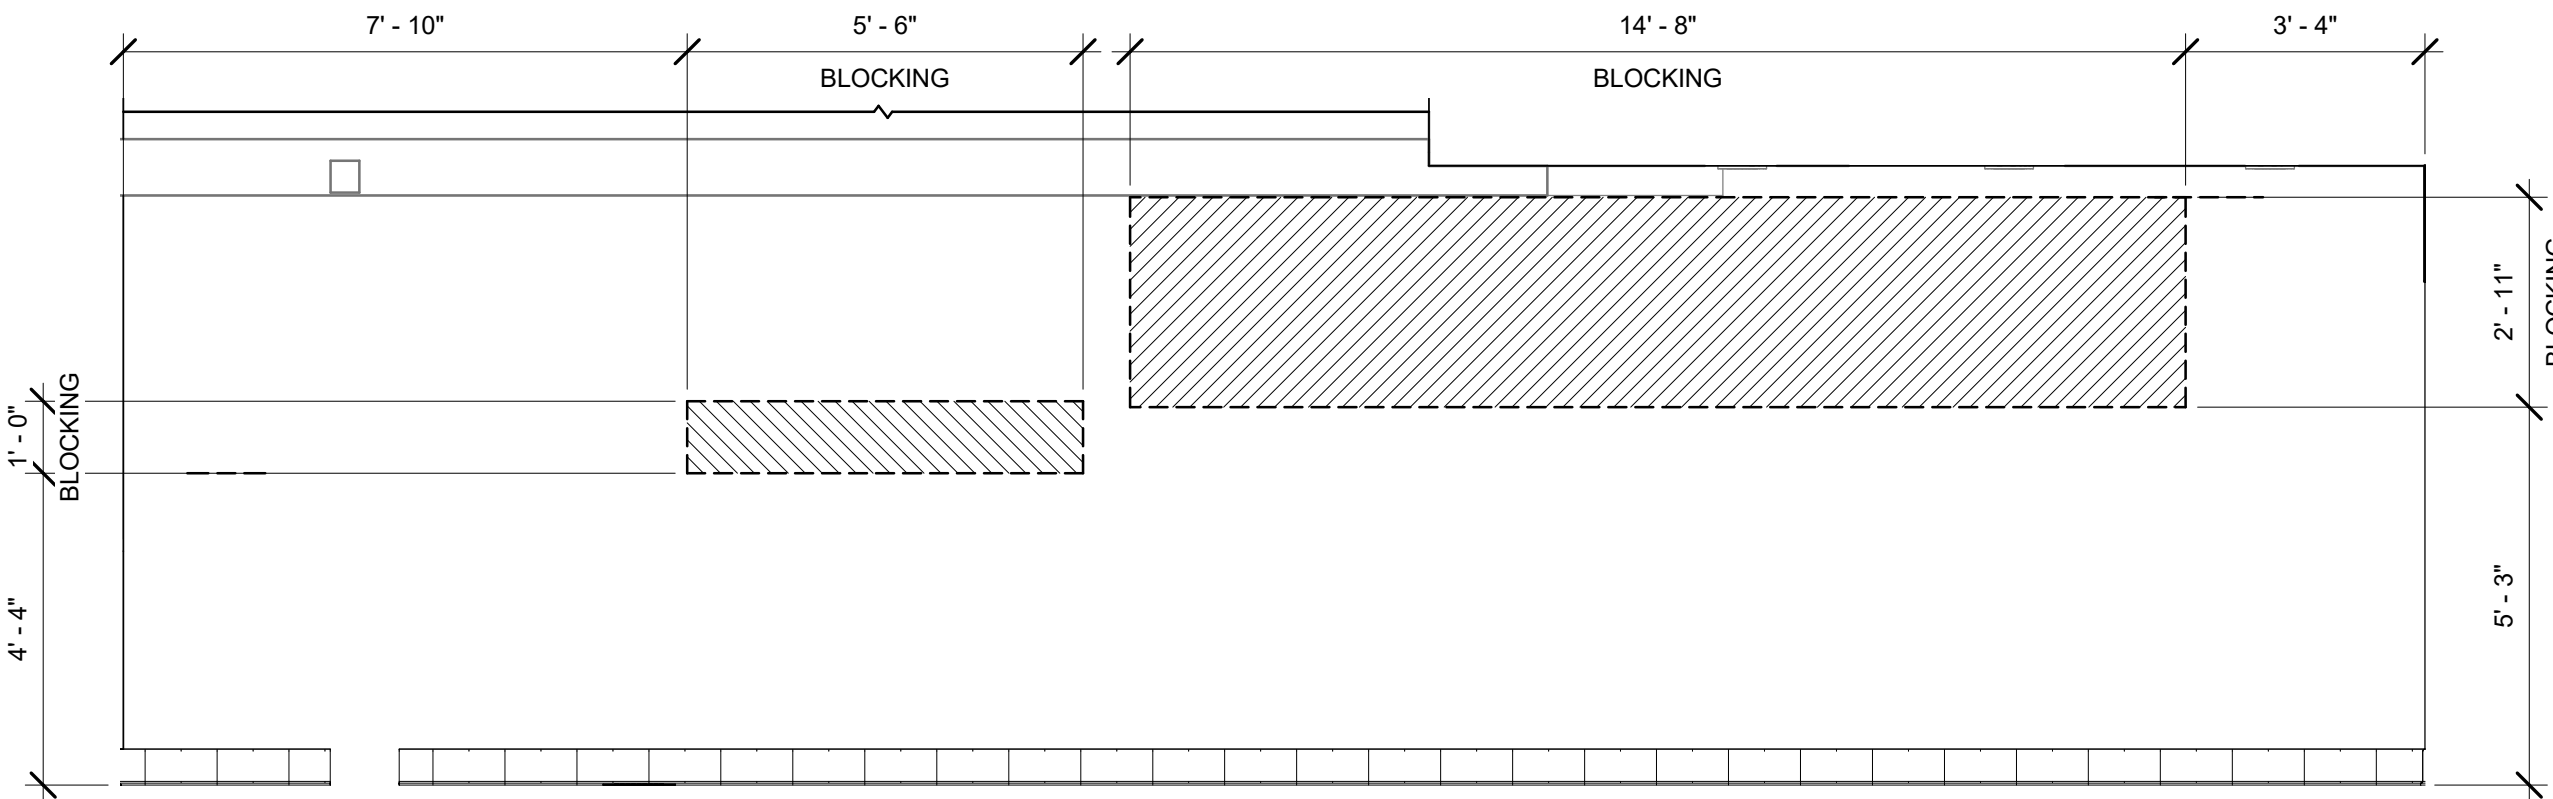


2 BACKBAR BLOCKING ELEVATION

Scale: 3/8" = 1'-0"

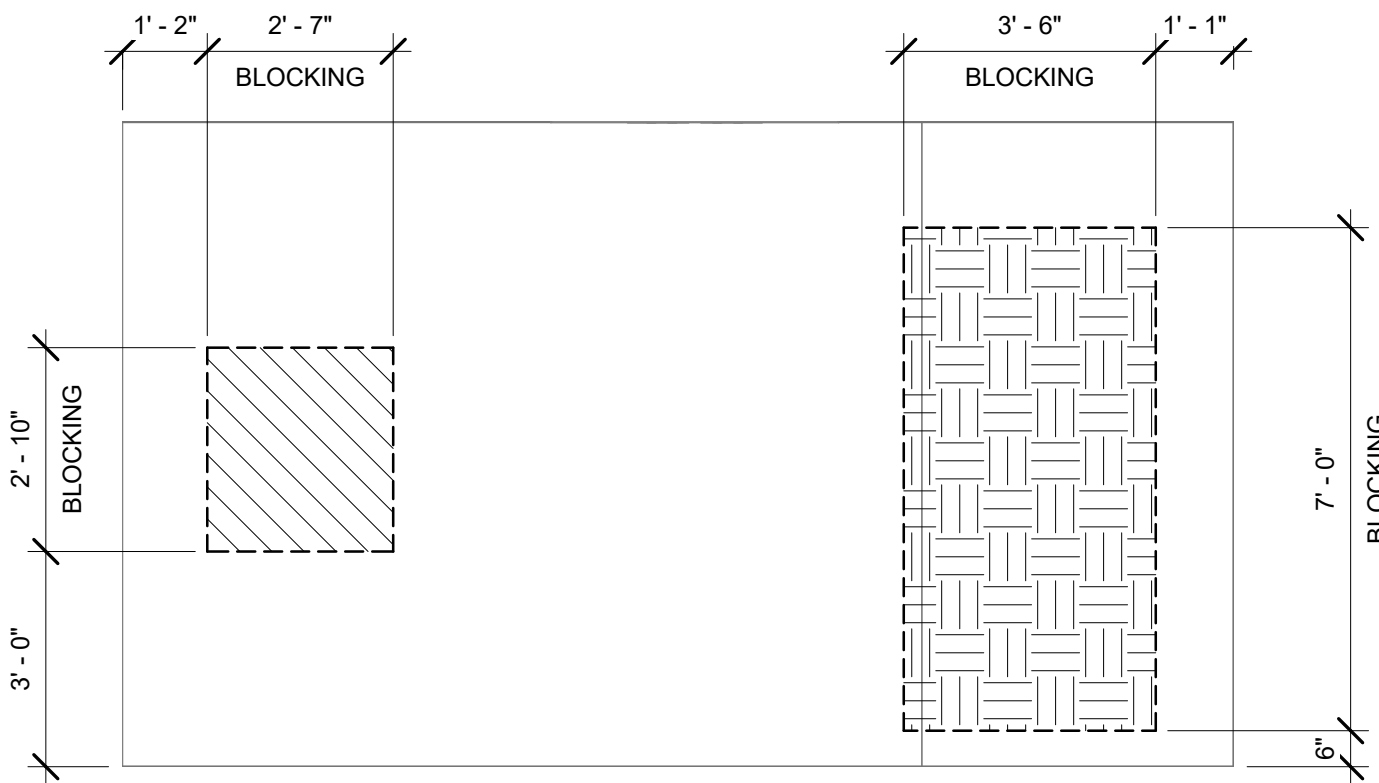

3 WORKROOM EAST BLOCKING ELEVATION

Scale: 3/8" = 1'-0"

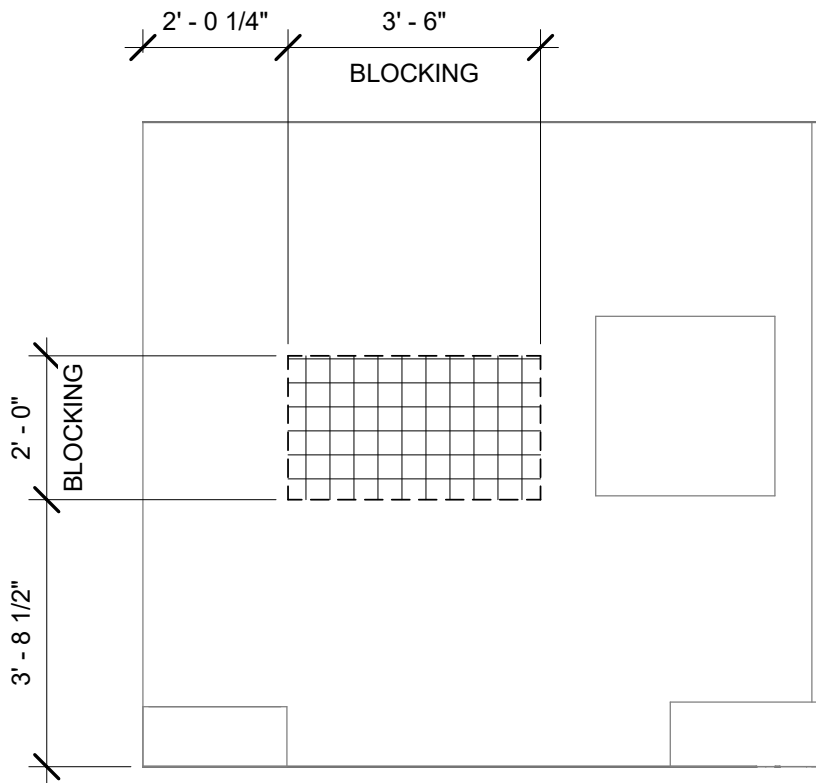

4 WORKROOM NORTH BLOCKING ELEVATION

Scale: 3/8" = 1'-0"

WALL BLOCKING LEGEND

HATCH	ITEM	WEIGHT	HEIGHT AFF	APPROX. WIDTH
	MENU BOARDS	MIN. 25LBS	5' - 3" TO 8' - 2"	14' - 8"
	CBE SHELVES	MIN. 300LBS	4' - 4" TO 5' - 4"	5' - 6"
	SPC ENCLOSURE	AOR TO VERIFY	3' - 0" TO 5' - 10"	2' - 7"
	MERCH SHELF	AOR TO VERIFY	5' - 0" TO 7' - 4"	6' - 6"
	HOT WATER HEATER SHELF	500-LB MIN	3' - 8 1/2" TO 5' - 8 1/2"	3' - 6"
	WATER FILLING STATION	AOR TO VERIFY	0' - 6" TO 7' - 6"	3' - 6"

PROVIDE FIRE TREATED 2X6 OR 2X8 WOOD STUD BLOCKING AS REQUIRED TO SUPPORT ANY WALL ATTACHMENTS.

REFER TO SHEETS A401 FOR LOCATIONS OF BLOCKING, MOUNTING HEIGHTS, AND EXTEND OF BLOCKING SURFACES.


WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303


No. Date Issue By Check


Revisions

No. Date Revision By Check

BLOCKING
ELEVATIONS





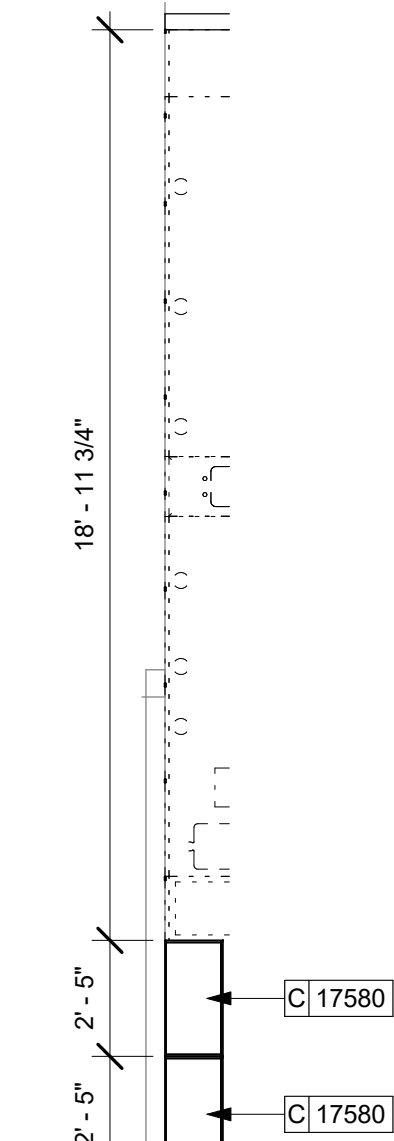

2 UPPER CASEWORK PLAN




Scale: $1/4" = 1'-0"$

KEYED NOTES



1. DO NOT CAULK TRASH RINGS TO COUNTERTOPS.
2. INSTALL CASEWORK, COUNTERTOPS, SHELVES, CUBBIES, FINISHES, TRIM AND TABLE TOPS THROUGHOUT.
3. ALL COUNTERTOPS SHALL BE INSTALLED AT 2"-10" (860 MM) MAXIMUM A.F.F. MAX.
4. WALL FINISH BEHIND EXPOSED CABINETRY AND BELOW UNDERSIDE OF COUNTERTOP SUBSTRATE TO BE FRP.
5. FLOOR SINK BELOW CASEWORK MANUFACTURER TO COORDINATE DESIGN TO ENSURE THIS AREA IS READILY ACCESSIBLE FOR CLEANING AND FREE OF CABINET / COUNTERTOP SUPPORT.
6. PROVIDE ACCENT LIGHTING AT FRONT EDGE OF BAR. SEE INTERIOR ELEVATIONS AND ELECTRICAL FOR ADDITIONAL INFORMATION.
7. SHOWN FOR REFERENCE - EXISTING FLOOR SINK OBSERVABLE IN FRONT OF HOUSE AREA. POSSIBLY TO BE RE-USED STILL UNDER CONSIDERATION.


- A. GENERAL CONTRACTOR TO NOTIFY STARBUCKS PROJECT DEVELOPMENT MANAGER IMMEDIATELY IF A DISCREPANCY EXISTS BETWEEN CASEWORK SHOP DRAWINGS, EXISTING SITE CONDITIONS, ARCHITECTURAL DRAWINGS OR BUILT CASEWORK FIXTURES. GENERAL CONTRACTOR MUST MAINTAIN ALL "HOLD" TO DIMENSIONS SHOWN ON PLANS AND SHOP DRAWINGS.
- B. STARBUCKS PROJECT DEVELOPMENT MANAGER TO COORDINATE AND SCHEDULE CASEWORK DELIVERY DATE. STARBUCKS PROJECT DEVELOPMENT MANAGER TO CONFIRM CASEWORK DELIVERY DATE WITH CASEWORK MANUFACTURER AT FOUR (4) WEEKS PRIOR AND THEN ONE (1) WEEK PRIOR TO SCHEDULED DATE OF DELIVERY.
- C. STARBUCKS CONTRACTS DIRECTLY WITH CASEWORK VENDOR TO SUPPLY CASEWORK LISTED IN THE CASEWORK SCHEDULE, UNLESS NOTED OTHERWISE.
- D. ALL CASEWORK BOX BASES / TOE KICKS SHALL BE SET AND LEVELED USING 1/4" (6MM) NON-ABSORBENT PLASTIC SHIMS PROVIDED BY CASEWORK VENDOR.
- E. CASEWORK MANUFACTURER TO ENGINEER PROPER COUNTERTOP SUPPORT AT ESPRESSO BAR AND OTHER WORK STATIONS PER STARBUCKS MINIMUM PERFORMANCE REQUIREMENTS.
- F. SEE WALL FINISH PLAN FOR LOCATION, TAGGING, AND FINISH SCHEDULES OF APPLIED WALL TREATMENTS.
- G. SEE REFLECTED CEILING PLAN FOR CASEWORK SOFFIT LOCATIONS.
- H. CASEWORK VENDOR TO PROVIDE ALL SHOP DRAWINGS TO STARBUCKS DESIGN MANAGER AND ARCHITECT OF RECORD FOR REVIEW PRIOR TO MANUFACTURE.
- I. REFERENCE PLUMBING AND ELECTRICAL PLANS FOR PLACEMENT OF ELECTRICAL, DATA, AND PLUMBING ON FRONT AND BACKLINE OF BAR.

LEGEND

	INDICATES STAINLESS STEEL (SST) COUNTERTOP
	INDICATES SOLID SURFACE (SS) COUNTERTOP
	EXISTING FLOOR SINK

SB - STARBUCKS
FC - STARBUCKS FIXTURE CONTRACTOR
LC - LICENSEE
GC - LICENSEE'S GENERAL CONTRACTOR



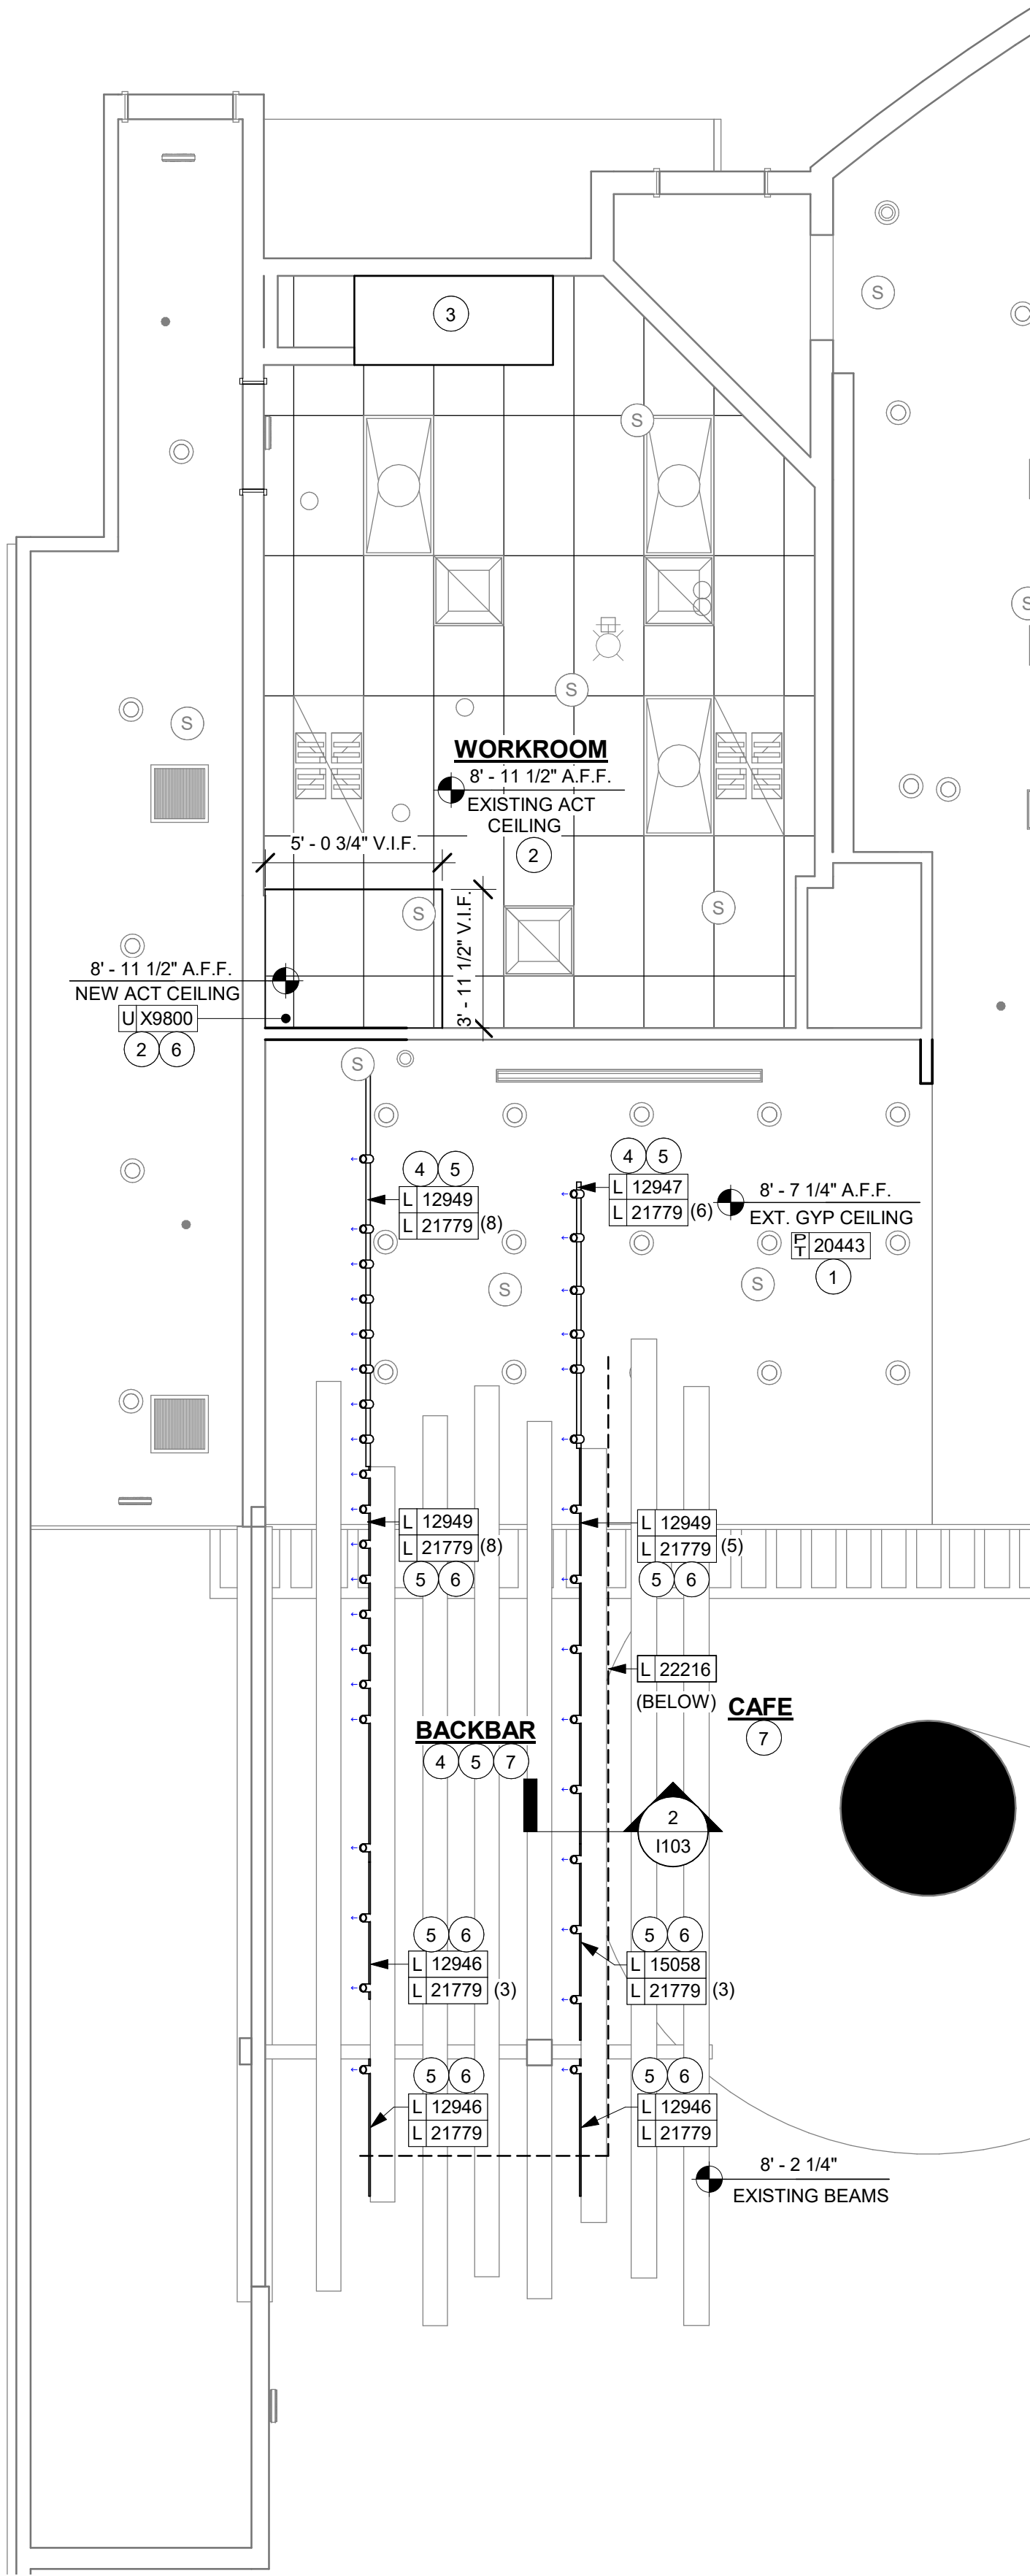


1 REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"

2 TRACK MOUNTING DETAIL
Scale: 1 1/2" = 1'-0"

LIGHTING FIXTURE SCHEDULE - "L"						
DESIGN ID	COUNT	DESCRIPTION	FURN. BY	INST. BY	BULB	COMMENTS
STRIP						
22216	1	STRIP - LED TAPE IN HOUSING - VARIABLE LENGTH - WHITE - 350LM PER FT	SB	GC	INTEGRATED LED	FIELD TRIMMABLE TO 0.9IN LENGTHS; OVERALL LENGTHS (1) AT FRONTBAR COUNTERTOP 30' - 0"
TRACK						
12946	3	TRACK - WITH CONNECTORS - 4FT 122CM - BLACK - 1 CIRCUIT	SB	GC		
12947	1	TRACK - WITH CONNECTORS - 8FT 244CM - BLACK - 1 CIRCUIT	SB	GC		
12949	3	TRACK - WITH CONNECTORS - 12FT 365CM - BLACK - 1 CIRCUIT	SB	GC		
15058	1	TRACK - WITH CONNECTORS - 6FT 183CM - BLACK - 1 CIRCUIT	SB	GC		
21779	35	TRACK - LED FIXTURE WITH SNOOT - 3IN 75MM - BLACK - 1100LM FLOOD	SB	GC	INTEGRATED LED	

CEILING TREATMENT SCHEDULE - "U"					
DESIGN ID	AREA	DESCRIPTION	FURN. BY	INST. BY	COMMENTS
OTHER					
X9800	20 SF	ACT 2 X 4	GC	GC	MATCH EXISTING

PAINT SCHEDULE						
DESIGN ID	DESCRIPTION		LRV	FURN. BY	INST. BY	COMMENTS
20443	SW7042 SHOJI WHITE		74	GC	GC	SHERWIN WILLIAMS. EGGSHELL FINISH

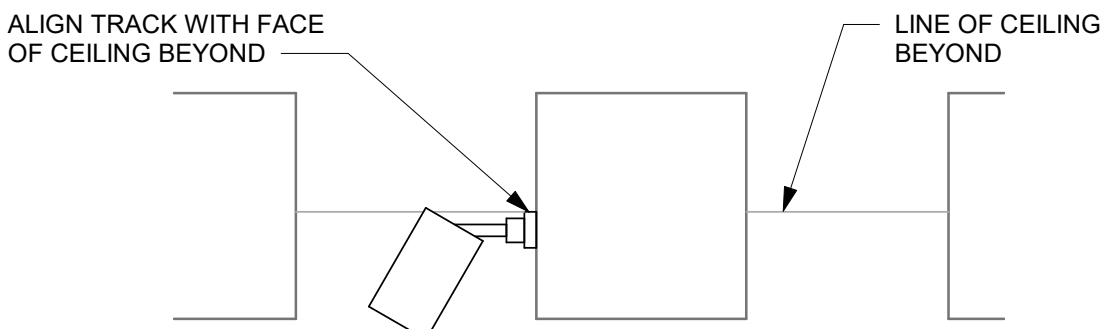

KEYED NOTES

- GWB SOFFIT WITH SMOOTH FINISH (PAINT AS SCHEDULED).
- WASHABLE CEILING TILE LOCATED IN BACK OF HOUSE.
- PLATFORM FOR WATER HEATER AND WATER FILTRATION EQUIPMENT. LIFT CEILING IN THIS AREA ONLY TO ENSURE ADEQUATE CLEARANCES FOR SERVICING.
- SURFACE MOUNT LIGHT TRACK DIRECTLY TO CEILING/SOFFIT.
- ADJUST FOCUS OF ALL TRACK LIGHTING AND RECESSED DIRECTIONAL LIGHTING TO FULLY ILLUMINATE MENU BOARDS, MERCHANDISE BAYS, AND ARTWORK.
- SURFACE MOUNT LIGHT TRACK DIRECTLY TO EXISTING BEAM.
- EXISTING LIGHTING TRIM, HVAC DIFFUSERS, SPRINKLER CAPS, ETC SHOULD BE PAINTED TO MATCH THE CEILING.

GENERAL NOTES

- IF REQUIRED BY LOCAL CODE, GENERAL CONTRACTOR TO PROVIDE SEMI-RECESSED SPRINKLER HEADS WITH POLISHED CHROME ESCUTCHEONS CENTERED IN ACOUSTICAL CEILING TILE. IF PENDANT HEADS ARE REQUIRED IN GWB SOFFIT OVER FRONTBAR, CONCEAL SUPPLY PIPING WITHIN SOFFIT.
- GENERAL CONTRACTOR TO PROVIDE AND INSTALL SPRINKLERS PER APPROVED AOR LAYOUT AND LOCAL CODE. CONTACT ARCHITECT OF RECORD AND STARBUCKS PROJECT DEVELOPMENT MANAGER IF DESIGN INTENT IS AFFECTED.
- LEAVE TEN (10) ADDITIONAL RETAIL CEILING TILES TO MATCH RETAIL CEILING PAINT COLOR ABOVE THE WORKROOM CEILING FOR FUTURE USE.
- PROVIDE GROMMET AT ACOUSTIC CEILING TILE PENETRATIONS FOR FIXTURES OR SUPPORTS.
- HEATING, VENTILATING AND AIR CONDITIONING (HVAC) SHOWN ON THIS PLAN PROVIDED FOR REFERENCE ONLY. ACTUAL DUCTWORK AND CEILING DIFFUSER LOCATIONS TO BE DETERMINED BY ARCHITECT OF RECORD AND ARE NOT TO INTERFERE WITH PLACEMENT OF LIGHT FIXTURES AS SHOWN ON THIS PLAN. NOTIFY STARBUCKS DESIGN MANAGER OF ANY CONFLICTS.
- DIFFUSERS AND RETURNS IN ACOUSTICAL CEILING TO BE CENTERED IN TILE, UNLESS NOTED OTHERWISE.
- PAINT ALL EXPOSED HVAC DUCTS, HVAC DIFFUSERS, RECESSED SPEAKERS, LIGHT TRIM RINGS, PIPING, CONDUIT AND JUNCTION BOXES THE SAME COLOR AS SPECIFIED ON SURROUNDING CEILING OR SOFFIT UNLESS NOTED OTHERWISE, TYPICAL THROUGHOUT RETAIL AREA OF STORE.
- PAINT SUBSTITUTIONS ARE NOT ALLOWED. USE STARBUCKS NATIONAL SHERWIN WILLIAMS ACCOUNT "COLOR CODE" WHEN ORDERING PAINTS.
- ARCHITECT OF RECORD TO SPECIFY AND AND LOCATE EMERGENCY LIGHTS AND EXIT SIGNS AS REQUIRED BY CODE. FIXTURES TO BE SUPPLIED AND INSTALLED BY GENERAL CONTRACTOR.
- ARCHITECT OF RECORD TO PROVIDE CEILING AND SOFFIT STRUCTURAL DETAILS AS REQUIRED.
- BALLAST BOXES, TRANSFORMERS, JUNCTION BOXES, AND WIRING FOR ALL LIGHT FIXTURES TO BE INSTALLED SO AS TO BE HIDDEN FROM VIEW.


LEGEND

- ELEVATION DATUM
- TRACK LIGHTING
- STRIP LIGHTING
- RECESSED CAN LIGHT
- TROFFER
- SUPPLY AIR
- RETURN AIR

LICENSED STORES RESPONSIBILITY LEGEND

- SB - STARBUCKS
- FC - STARBUCKS FIXTURE CONTRACTOR
- LC - LICENSEE
- GC - LICENSEE'S GENERAL CONTRACTOR

ARCHITECT AND/OR ENGINEER OF RECORD TO VERIFY THAT HVAC DOES NOT INTERFERE WITH LIGHTING PLACEMENT. NOTIFY STARBUCKS DESIGN MANAGER OF ANY CONFLICTS.



WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303

No.	Date	Issue	By	Check
-----	------	-------	----	-------

Revisions

No.	Date	Revision	By	Check
-----	------	----------	----	-------

REFLECTED CEILING PLAN

1103




KEYED NOTES

- 1. SURFACE MOUNT LIGHT TRACK DIRECTLY TO CEILING/SOFFIT.
- 2. MOUNT TRACK LIGHTING DIRECTLY ON SIDE OF EXISTING BEAMS.

GENERAL NOTES


- A. HEATING, VENTILATING AND AIR CONDITIONING (HVAC) SHOWN ON THIS PLAN PROVIDED FOR REFERENCE ONLY. ACTUAL DUCTWORK AND CEILING DIFFUSER LOCATIONS TO BE DETERMINED BY ARCHITECT OF RECORD AND ARE NOT TO INTERFERE WITH PLACEMENT OF LIGHT FIXTURES AS SHOWN ON THIS PLAN. NOTIFY STARBUCKS DESIGN MANAGER OF ANY CONFLICTS.
- B. DIFFUSERS AND RETURNS IN ACOUSTICAL CEILING TO BE CENTERED IN TILE, UNLESS OTHERWISE NOTED.
- C. ARCHITECT OF RECORD TO SPECIFY AND AND LOCATE EMERGENCY LIGHTS AND EXIT SIGNS AS REQUIRED BY CODE. FIXTURES TO BE SUPPLIED AND INSTALLED BY GENERAL CONTRACTOR.

ARCHITECT AND/OR ENGINEER OF RECORD TO VERIFY THAT HVAC DOES NOT INTERFERE WITH LIGHTING PLACEMENT. NOTIFY STARBUCKS DESIGN MANAGER OF ANY CONFLICTS.

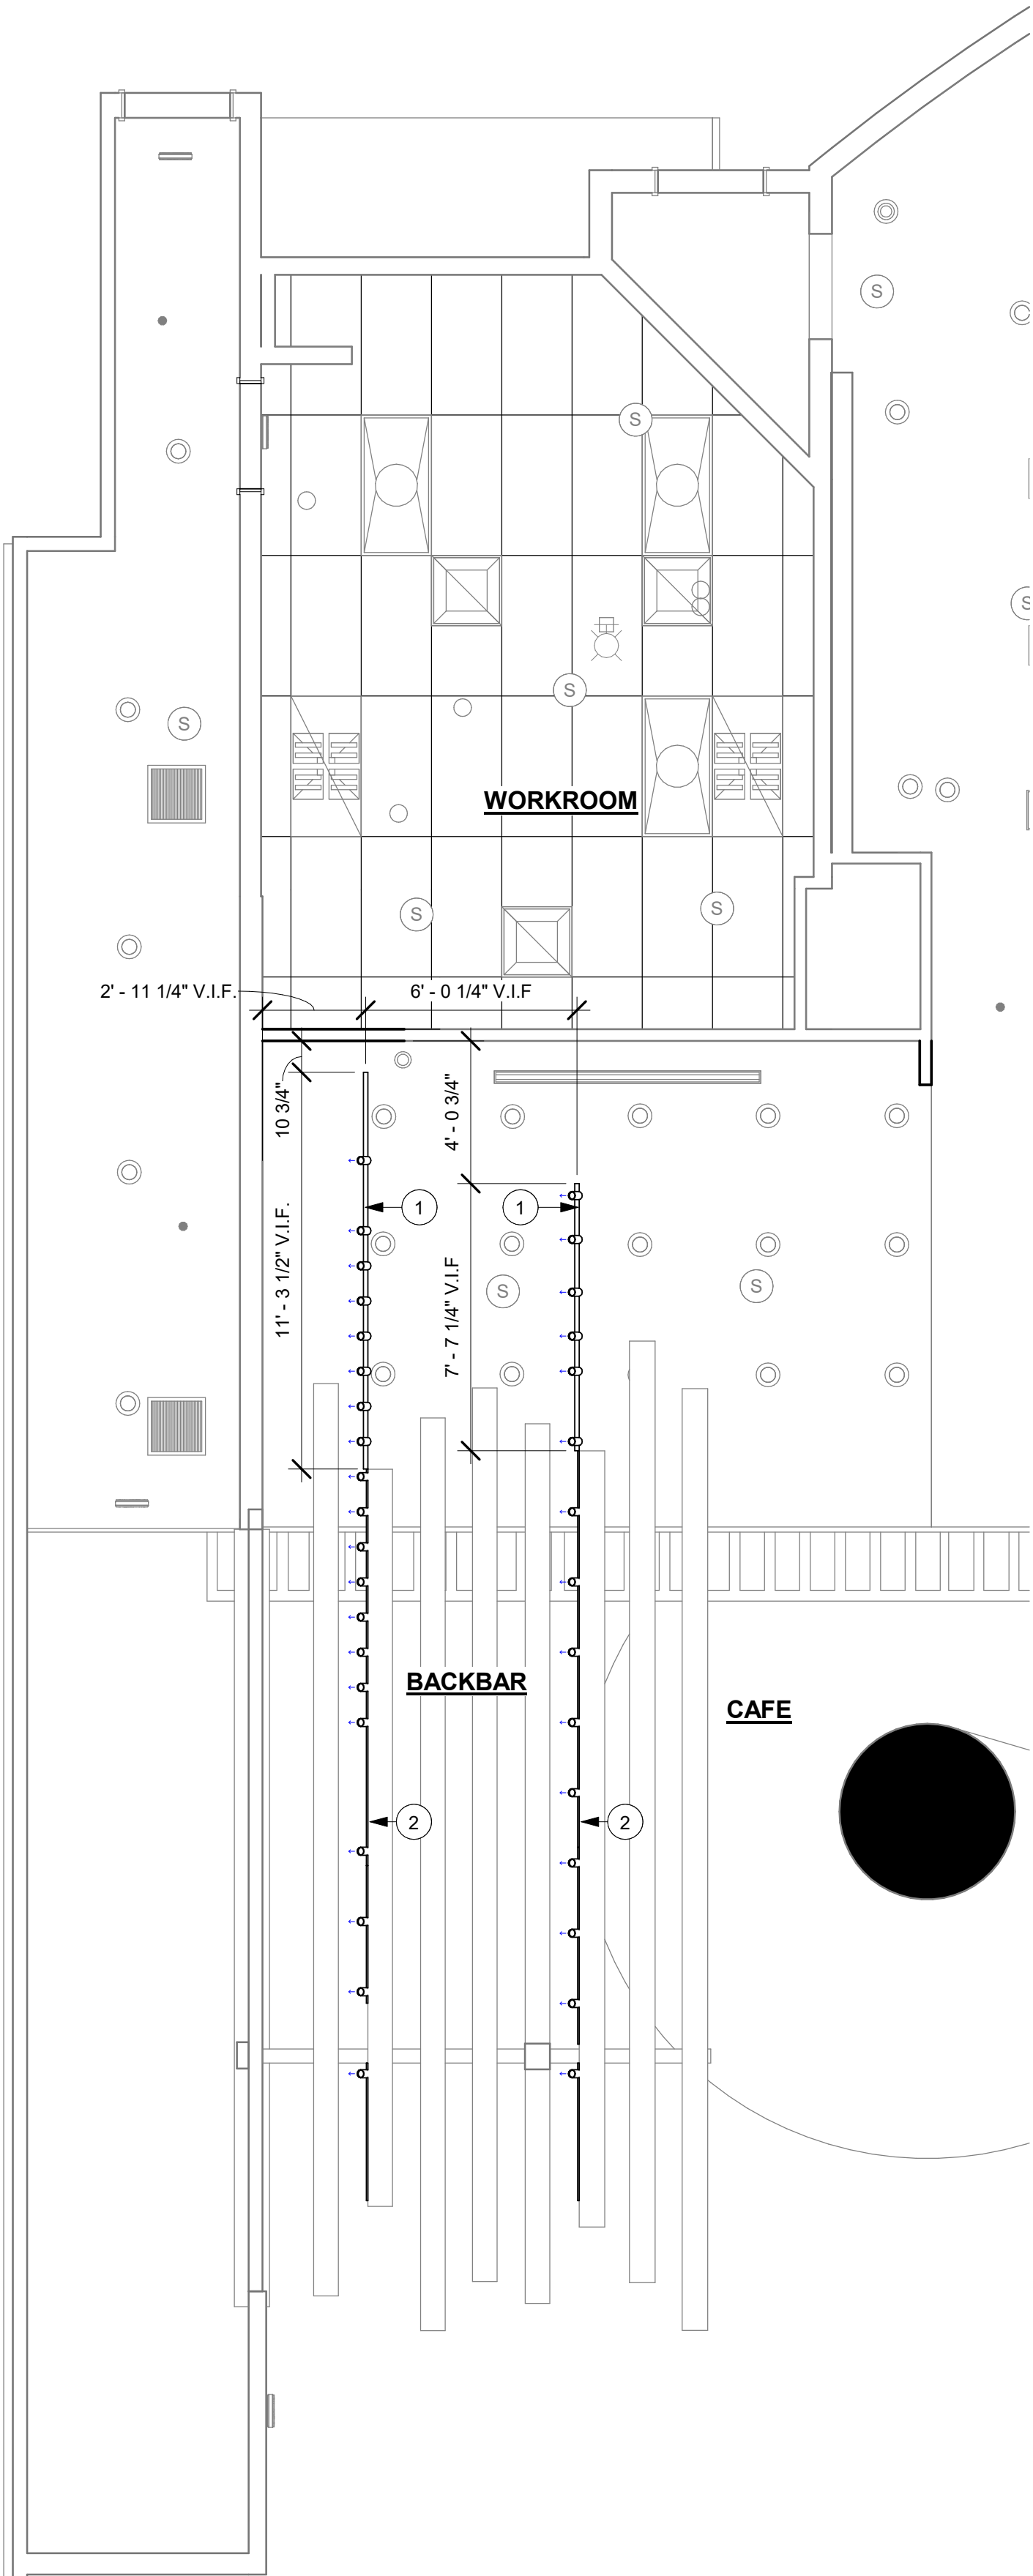

1 LIGHTING DIMENSION PLAN

Scale: 1/4" = 1'-0"

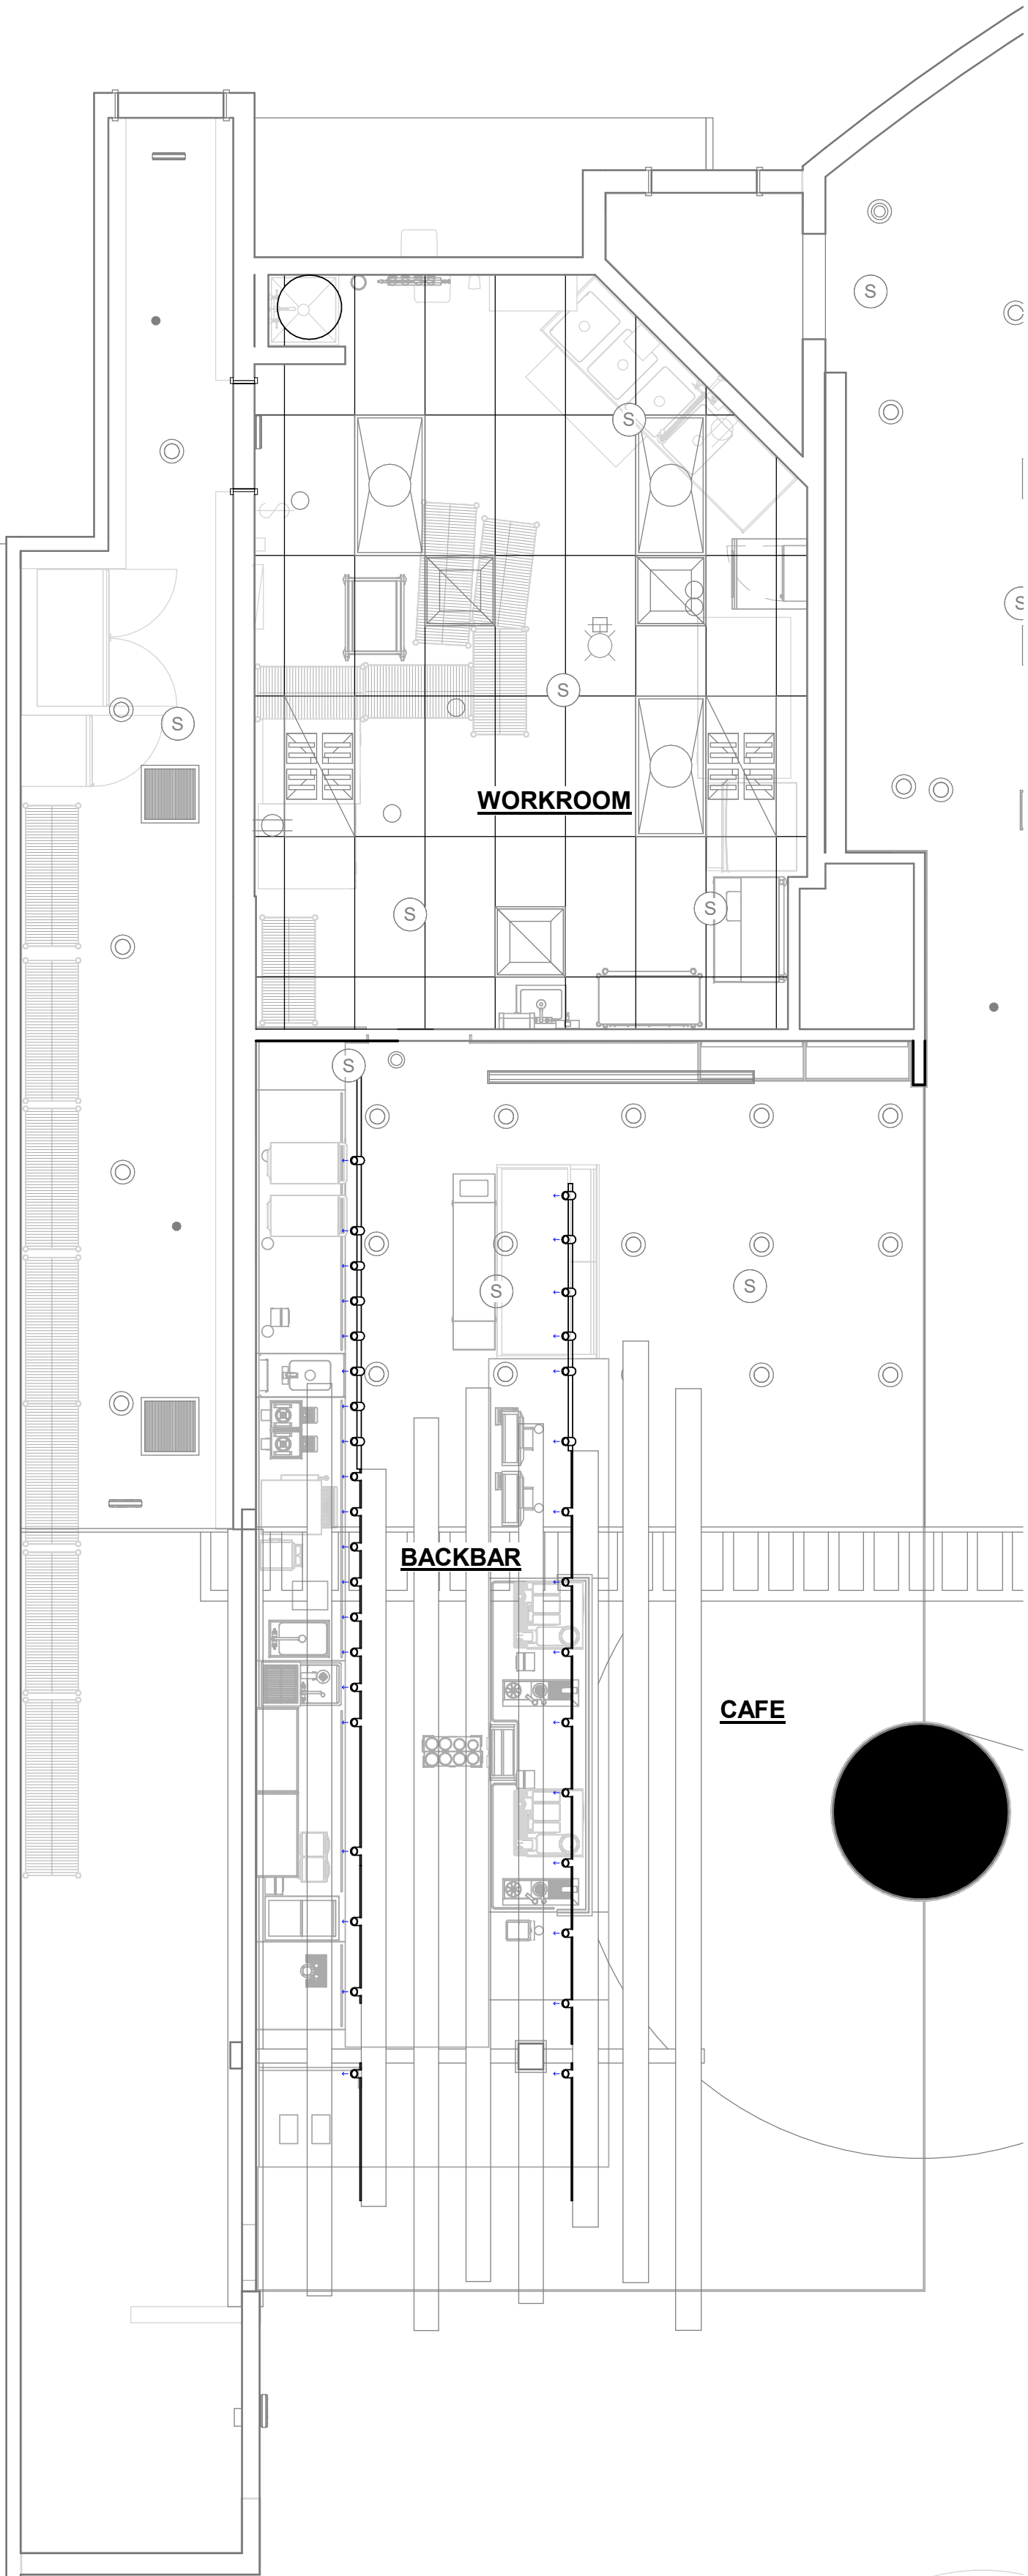

2 LIGHTING PLACEMENT PLAN

Scale: 1/4" = 1'-0"

WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303


No. Date Issue By Check

Revisions

No. Date Revision By Check

LIGHTING DIMENSION
PLAN




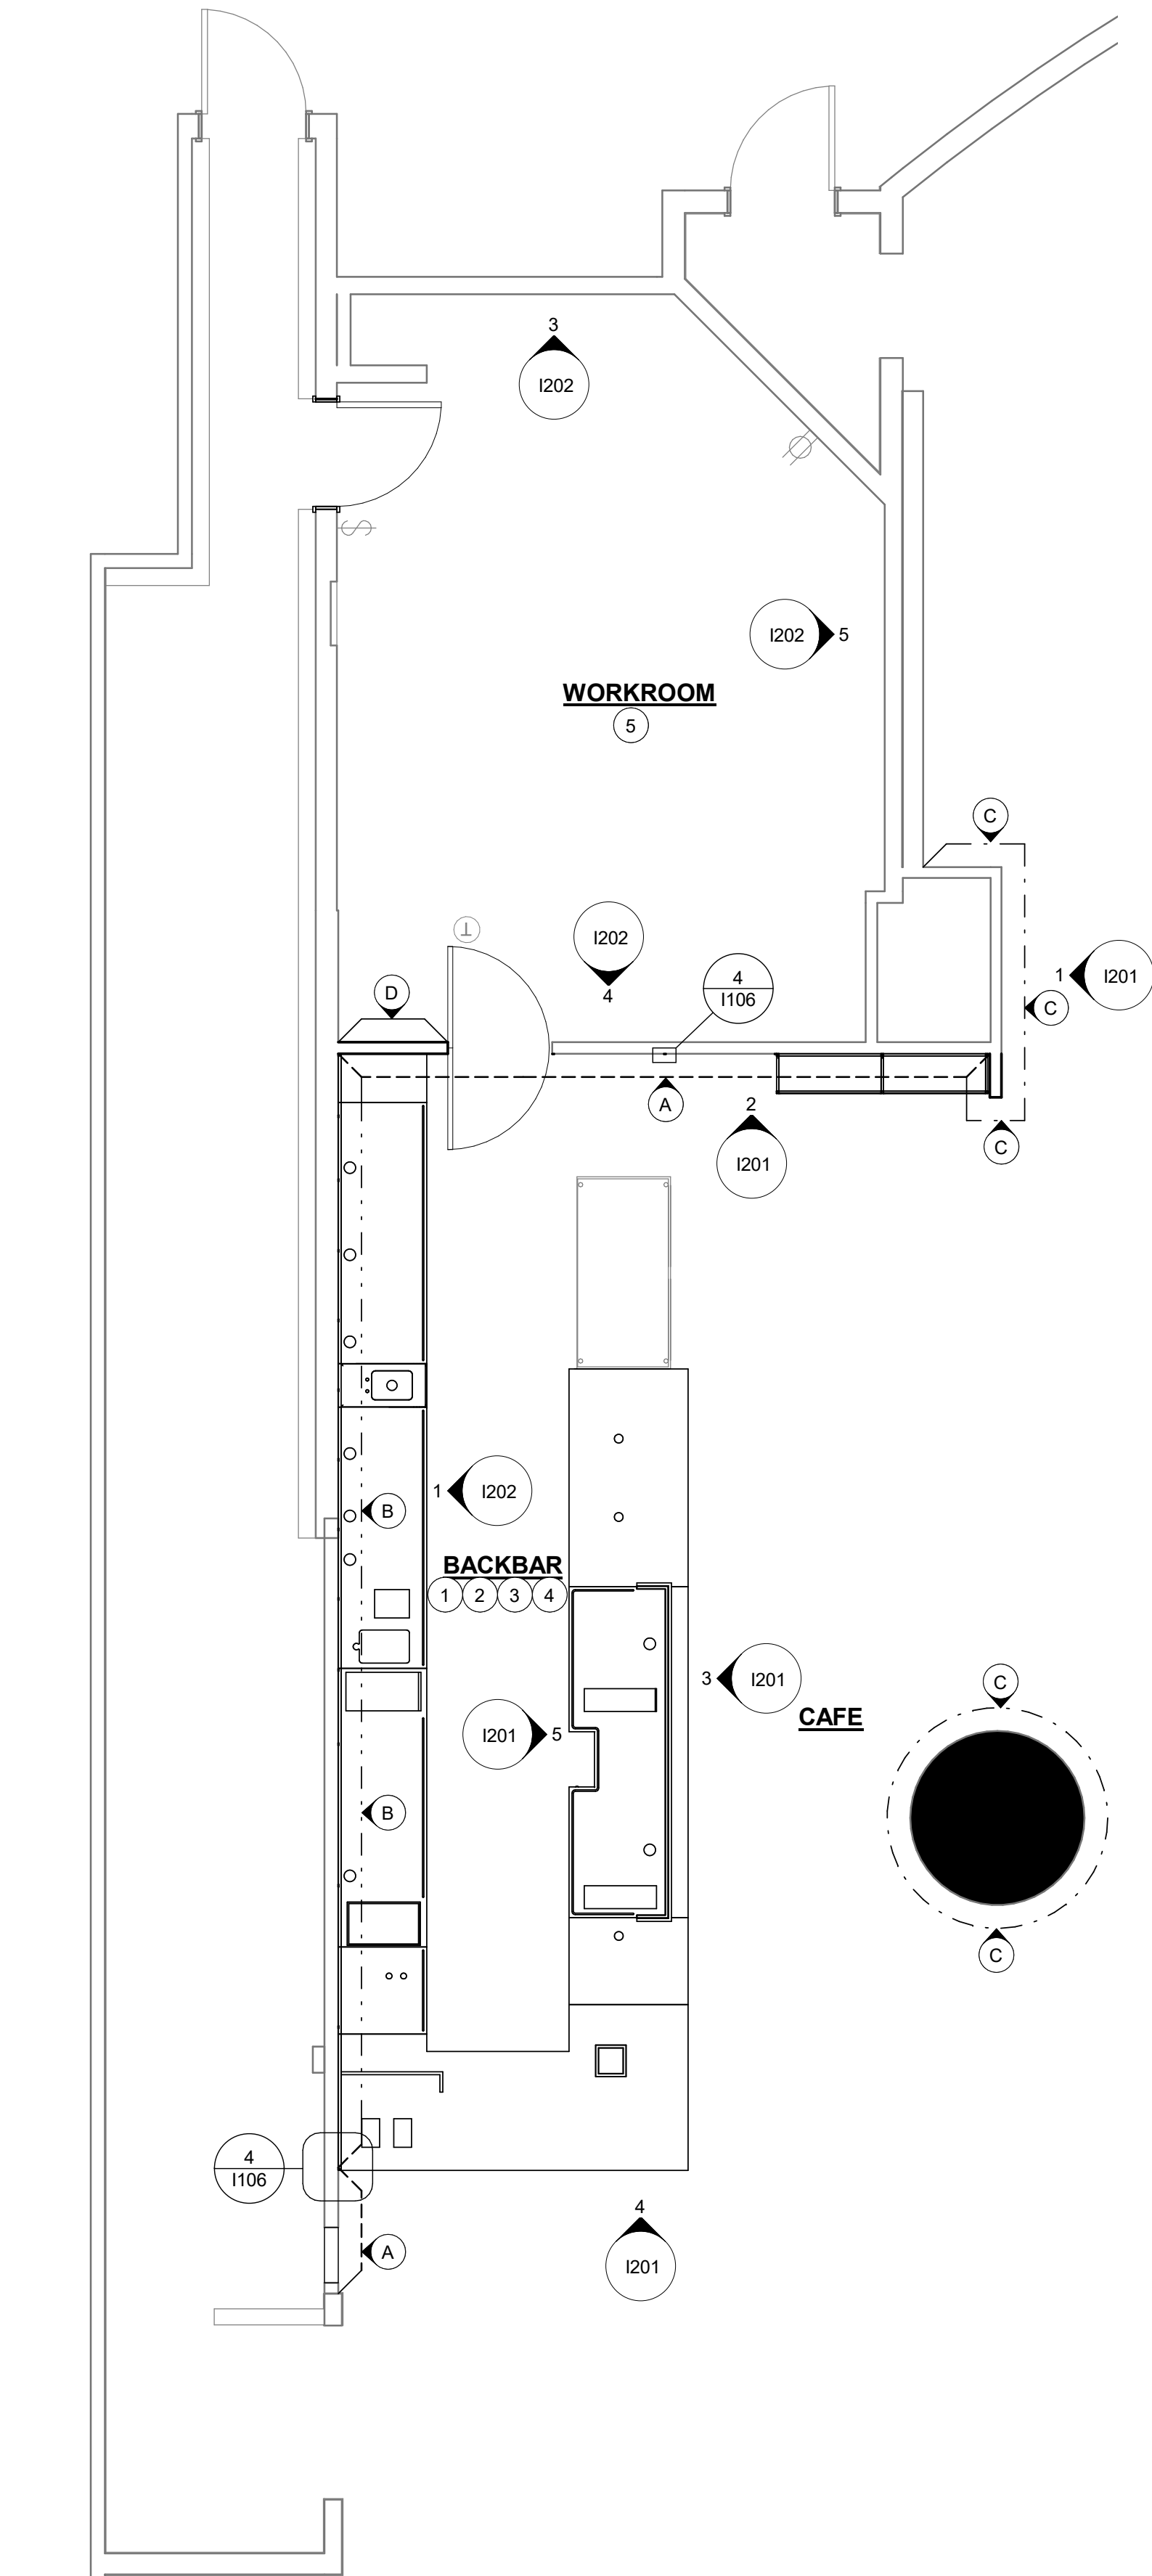


1 INTERIOR WALL FINISH PLAN
Scale: 1/4" = 1'-0"

WALL TREATMENT (AREA) SCHEDULE - "Q"					
DESIGN ID	AREA	DESCRIPTION	FURN. BY	INST. BY	COMMENTS
PLASTIC					
11469	82 SF	FRP - WHITE	GC	GC	
TILE					
20241	386 SF	TILE - RINIA - CREAM - 12X12IN 300X300MM SHEET	GC	GC	VERTICAL STACK INSTALLATION PATTERN. GROUT: MAPEI 14 BISCUIT; TILE SUPPLIER: DESIGN & DIRECT SOURCE LLC. CONTACT: SUZANNE SANNING (503) 565-0600 OR ssanning@designanddirectsource.com; REFER TO ELEVATIONS FOR ADDITIONAL INSTALLATION INFORMATION


PAINT SCHEDULE						
DESIGN ID	DESCRIPTION		LRV	FURN. BY	INST. BY	COMMENTS
20443	SW7042 SHOJI WHITE		74	GC	GC	SHERWIN WILLIAMS. EGGSHELL FINISH

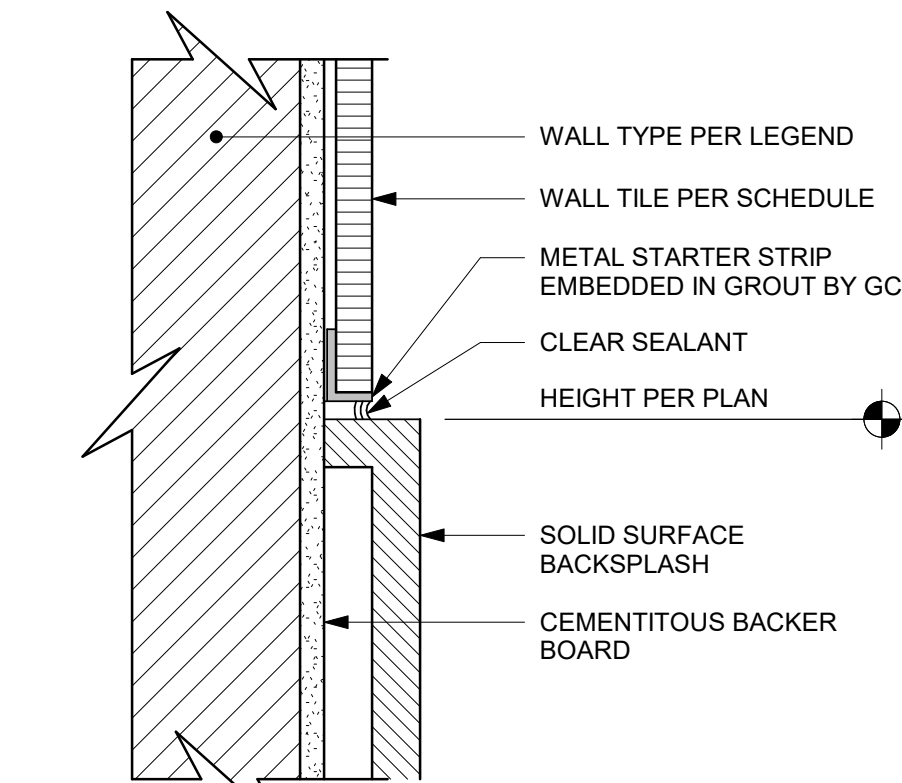

2 SS BACKSPLASH TO TILE TRANSITION
Scale: 6" = 1'-0"

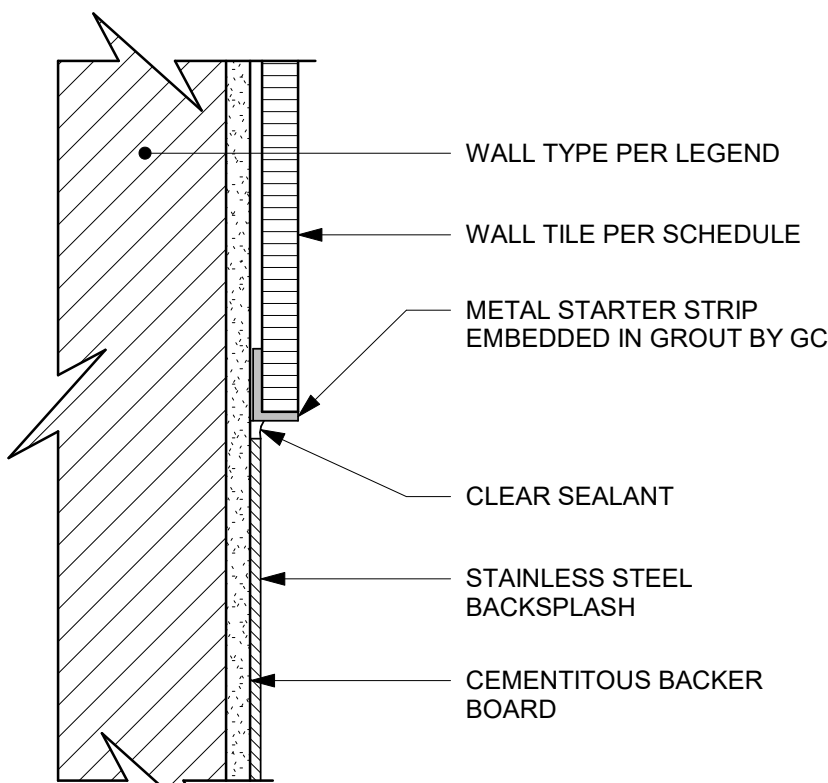

3 SST BACKSPLASH TO TILE TRANSITION
Scale: 6" = 1'-0"

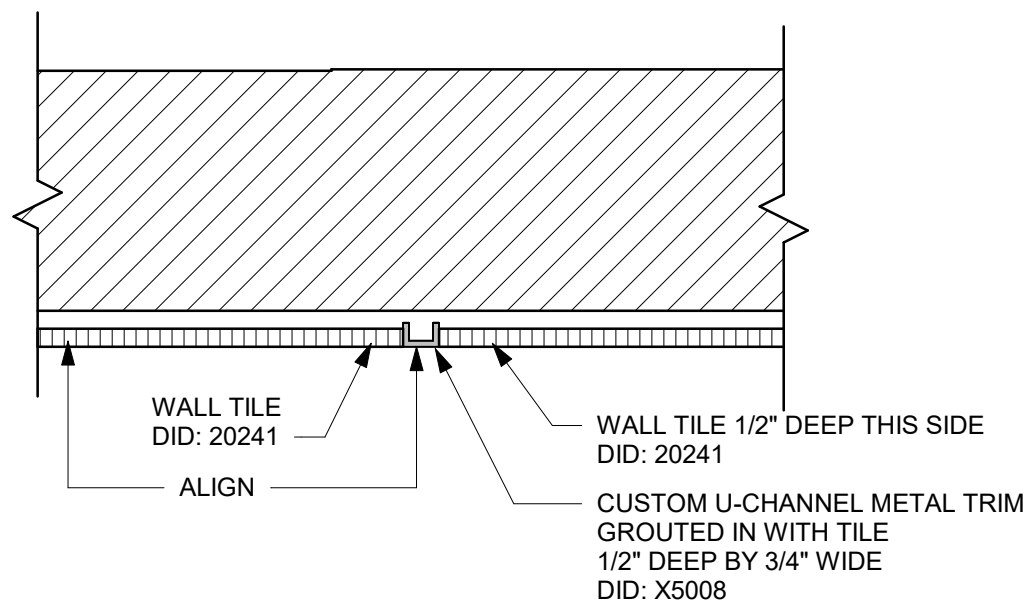

4 METAL TRIM DETAIL
Scale: 3" = 1'-0"

KEYED NOTES

- GENERAL CONTRACTOR TO PROVIDE AND INSTALL FRP WALL FINISH BEHIND CASEWORK CABINETRY IN AREAS BELOW COUNTERTOP HEIGHT.
- SEE INTERIOR FINISH ELEVATIONS FOR FULL EXTENT OF BACK BAR WALL TILE.
- BACK BAR WALL TILE TO BE INSTALLED IN "VERTICALLY STACKED" PATTERN.
- GENERAL CONTRACTOR TO PROVIDE FIRE TREATED WOOD STUD BLOCKING AS REQUIRED TO SUPPORT ANY WALL ATTACHMENTS. SEE BUILDING FLOOR PLAN SHEET A101 FOR MORE INFORMATION.
- WORKROOM FINISHES TO REMAIN. GC TO PATCH AND REPAIR AS REQUIRED.

GENERAL NOTES

- GENERAL CONTRACTOR TO PATCH AND REPAIR ANY DAMAGE TO EXISTING WALLS TO A SMOOTH, PAINT READY SURFACE PRIOR TO PAINTING.
- FLOORS, WALLS, AND CEILING FINISHES IN FOOD PREPARATION AREAS SHALL BE SMOOTH, NON-TOXIC, NON-ABSORBENT, DURABLE, AND EASILY CLEANABLE. PAINT IN THESE AREAS SHALL BE WASHABLE, SEMI-GLOSS OR HIGH-GLOSS FINISH.
- CHANGE OF PAINT COLOR ONLY AT INSIDE CORNERS, UNLESS NOTED OTHERWISE.
- PAINT SUBSTITUTIONS ARE NOT ALLOWED. USE STARBUCKS NATIONAL SHERWIN WILLIAMS ACCOUNT "COLOR CODE" WHEN ORDERING PAINTS.
- PAINT FINISHES SHALL BE APPLIED AS FOLLOWS, UNLESS NOTED OTHERWISE:
 - WOOD AND METAL SURFACES SHALL BE SEMI-GLOSS OR EQUAL.
 - ACCENT AND TRIM PAINTS TO BE SEMI-GLOSS OR EQUAL.
 - WALL AND CEILING PAINTS TO BE EGGSHELL OR EQUAL.
 - PAINTS IN WORKROOM, RESTROOM(S), OR CAFE BAR SHALL BE SEMI-GLOSS EQUAL.
- WORKROOM TO BE FINISHED PER LOCAL CODE. GENERAL CONTRACTOR TO PROVIDE AND INSTALL WORKROOM WALL FINISHES.
- ALL WOOD SURFACES (DOORS, TRIM, SHELVES, CABINETRY, ETC.) SHALL BE SEALED.
- REFER TO INTERIOR FINISH ELEVATIONS FOR PAINT COLOR, ARTWORK, AND GRAPHICS LOCATIONS.
- GENERAL CONTRACTOR TO INSTALL WALL BLOCKING AND HANGERS FOR WALL SHELVING BEFORE INSTALLING BACK BAR WALL TILE.

WALL TREATMENT LEGEND

- (A) --- INDICATES BACKBAR WALL TILE*
- (B) --- INDICATES FRP BELOW COUNTERTOPS DID: 11469, BACKBAR WALL TILE DID: 20241 ABOVE*
- (C) --- INDICATES PAINTED FINISH DID: 20443*
- (D) --- INDICATES NEW FRP - MATCH EXISTING.
- * SEE INTERIOR FINISH ELEVATIONS FOR TAGGED LOCATION OF WALL FINISH MATERIAL.

LICENSED STORES RESPONSIBILITY LEGEND

- SB - STARBUCKS
- FC - STARBUCKS FIXTURE CONTRACTOR
- LC - LICENSEE
- GC - LICENSEE'S GENERAL CONTRACTOR



WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303

No.	Date	Issue	By	Check
-----	------	-------	----	-------

Revisions

No.	Date	Revision	By	Check
-----	------	----------	----	-------

INTERIOR WALL
FINISH PLAN

I106



SIGNAGE SCHEDULE - "S"						
DESIGN ID	COUNT	DESCRIPTION	FURN. BY	INST. BY	BULB	COMMENTS
SIGNAGE - OTHER						
X0001	1	SIGN - MOBILE ORDER PICK UP ILLUMINATED BLADE MOUNT - CUSTOM	SB	GC		AOR TO PROVIDE BLOCKING. CUSTOM POWDER COAT MOUNTING BRACKETPRISMATIC POWDERDECORE GOLD EMB-4979

GRAPHICS AND ARTWORK SCHEDULE - "G"					
DESIGN ID	COUNT	DESCRIPTION	FURN. BY	INST. BY	COMMENTS
GRAPHICS - INTERIOR MENU					
18982	6	MENU BOARD - FRONT INSERT PANEL WITH SQUARE FRAME - BLACK	SB	GC	
18983	1	MENU BOARD - DAILY OFFERING CHALKBOARD WITH SQUARE FRAME - BLACK	SB	GC	
18984	7	MENU BOARD - UNIVERSAL WALL MOUNT BRACKET	SB	GC	

RELOCATED (EXISTING) SIGNAGE SCHEDULE - "S"				
DESIGN ID	COUNT	DESCRIPTION	COMMENTS	
SIGNAGE - DISK				
13162	1	SIGN - DISK SF ILLUMINATED FLUSH MOUNTED EVOLVED - 36IN 915MM	RELOCATED. DO NOT ORDER.	

KEYED NOTES

1. STARBUCKS DESIGN MANAGER TO COORDINATE SIGNAGE PROPOSAL WITH VENDOR.
2. EXISTING FINISH TO REMAIN. GC TO PATCH AND REPAIR AS REQUIRED.

GENERAL NOTES

- A. FLOORS, WALL, AND CEILING FINISHES IN FOOD PREPARATION AREAS SHALL BE SMOOTH, NON-TOXIC, NON-ABSORBENT, DURABLE, AND EASILY CLEANABLE. PAINT IN THESE AREAS SHALL BE WASHABLE, SEMI-GLOSS OR HIGH GLOSS FINISH.
- B. CHANGE OF PAINT COLOR ONLY AT INSIDE CORNERS, UNLESS NOTED OTHERWISE.
- C. PAINT SUBSTITUTIONS ARE NOT ALLOWED. USE STARBUCKS NATIONAL SHERWIN WILLIAMS ACCOUNT "COLOR CODE" WHEN ORDERING PAINTS.
- D. PAINT FINISHES SHALL BE APPLIED AS FOLLOWS, UNLESS NOTED OTHERWISE:

1) WOODS AND METAL SURFACES SHALL BE SEMI-GLOSS OR EQUAL.

2) ACCENT AND TRIM PAINTS SHALL BE SEMI-GLOSS OR EQUAL.

3) WALL AND CEILING PAINTS SHALL BE EGGSHELL OR EQUAL.


4) PAINTS IN WORKROOM RESTROOM(S) OR CAFE BAR SHALL BE SEMI-GLOSS OR EQUAL.
- E. REFER TO INTERIOR WALL FINISH PLAN SHEET I106 FOR PAINT SCHEDULES AND WALL FINISH SCHEDULE.
- F. WORKROOM TO BE FINISHED PER LOCAL CODE. GENERAL CONTRACTOR TO PROVIDE AND INSTALL WORKROOM WALL FINISHES.
- G. ALL WOOD SURFACES (DOORS, TRIM, SHELVES, CABINETRY) SHALL BE SEALED.
- H. ALL FLOOR AND WALL JUNCTIONS IN STORAGE AND FOOD PREPARATION AREAS SHALL HAVE A 6" COVED BASE.
- I. GENERAL CONTRACTOR TO INSTALL WALL BLOCKING AND HANGERS FOR WALL SHELVING BEFORE INSTALLING BACK BAR WALL TILE.
- J. REFER TO MANUFACTURER'S INSTRUCTIONS INCLUDED WITH ARTWORK / GRAPHICS FOR PROPER INSTALLATION.

LEGEND


- INDICATES WALL BLOCKING. FIRE TREATED WALL BLOCKING TO BE PROVIDED AS REQUIRED TO SUPPORT WALL ATTACHMENTS. EXTEND BLOCKING 4" (100mm) BEYOND EDGE OF ATTACHMENTS.

LICENSED STORES RESPONSIBILITY LEGEND


- SB - STARBUCKS
- FC - STARBUCKS FIXTURE CONTRACTOR
- LC - LICENSEE
- GC - LICENSEE'S GENERAL CONTRACTOR

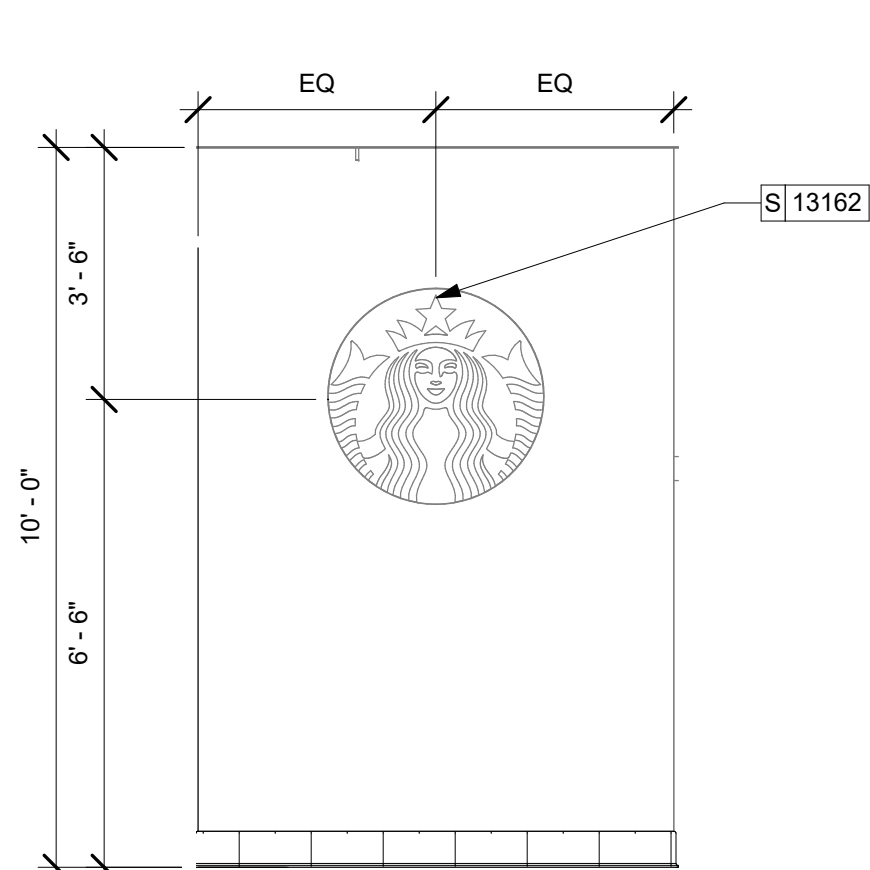


1 STOREFRONT ELEVATION

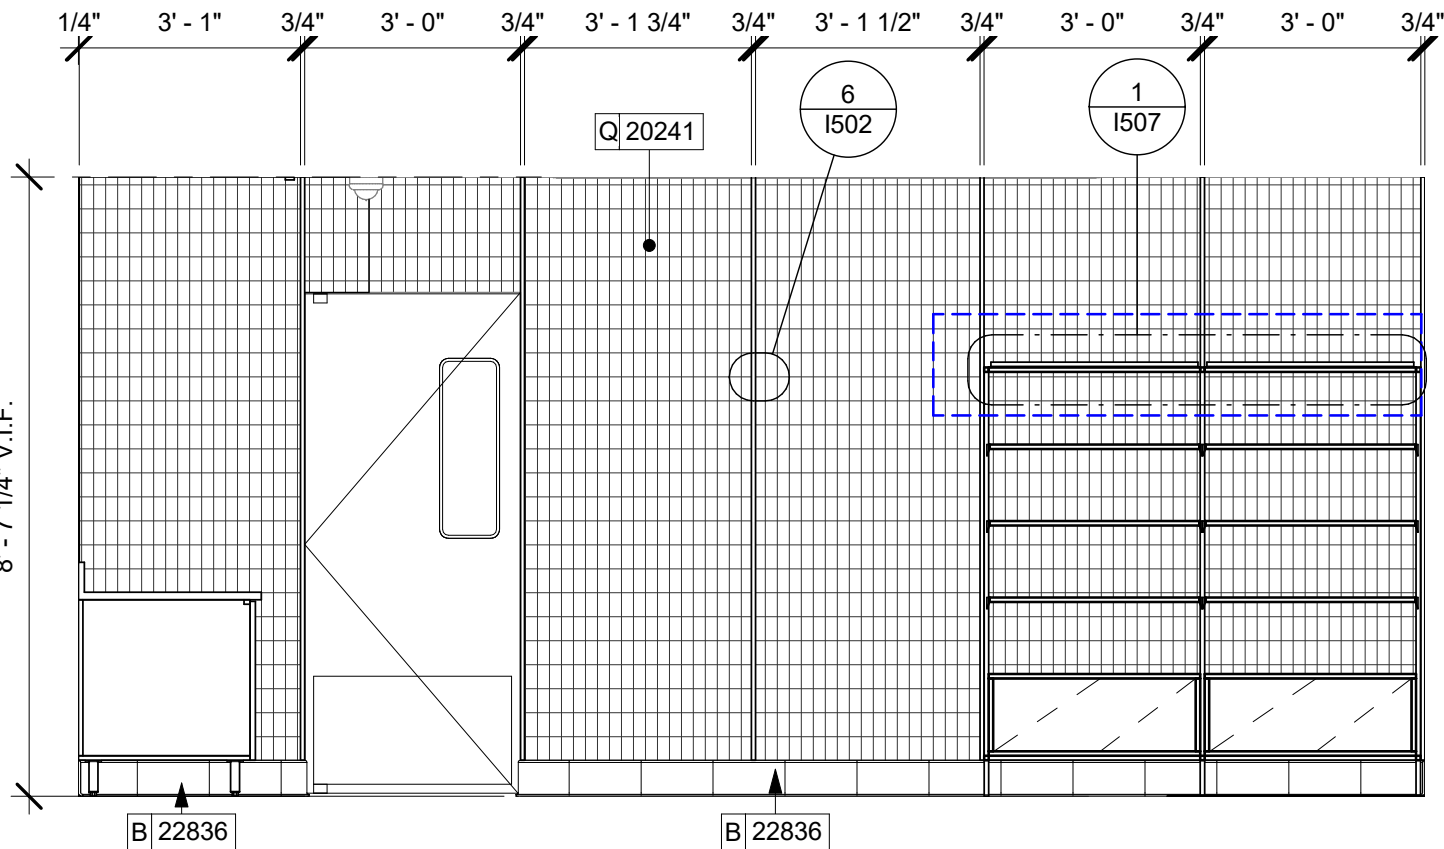


2 CAFE NORTH ELEVATION

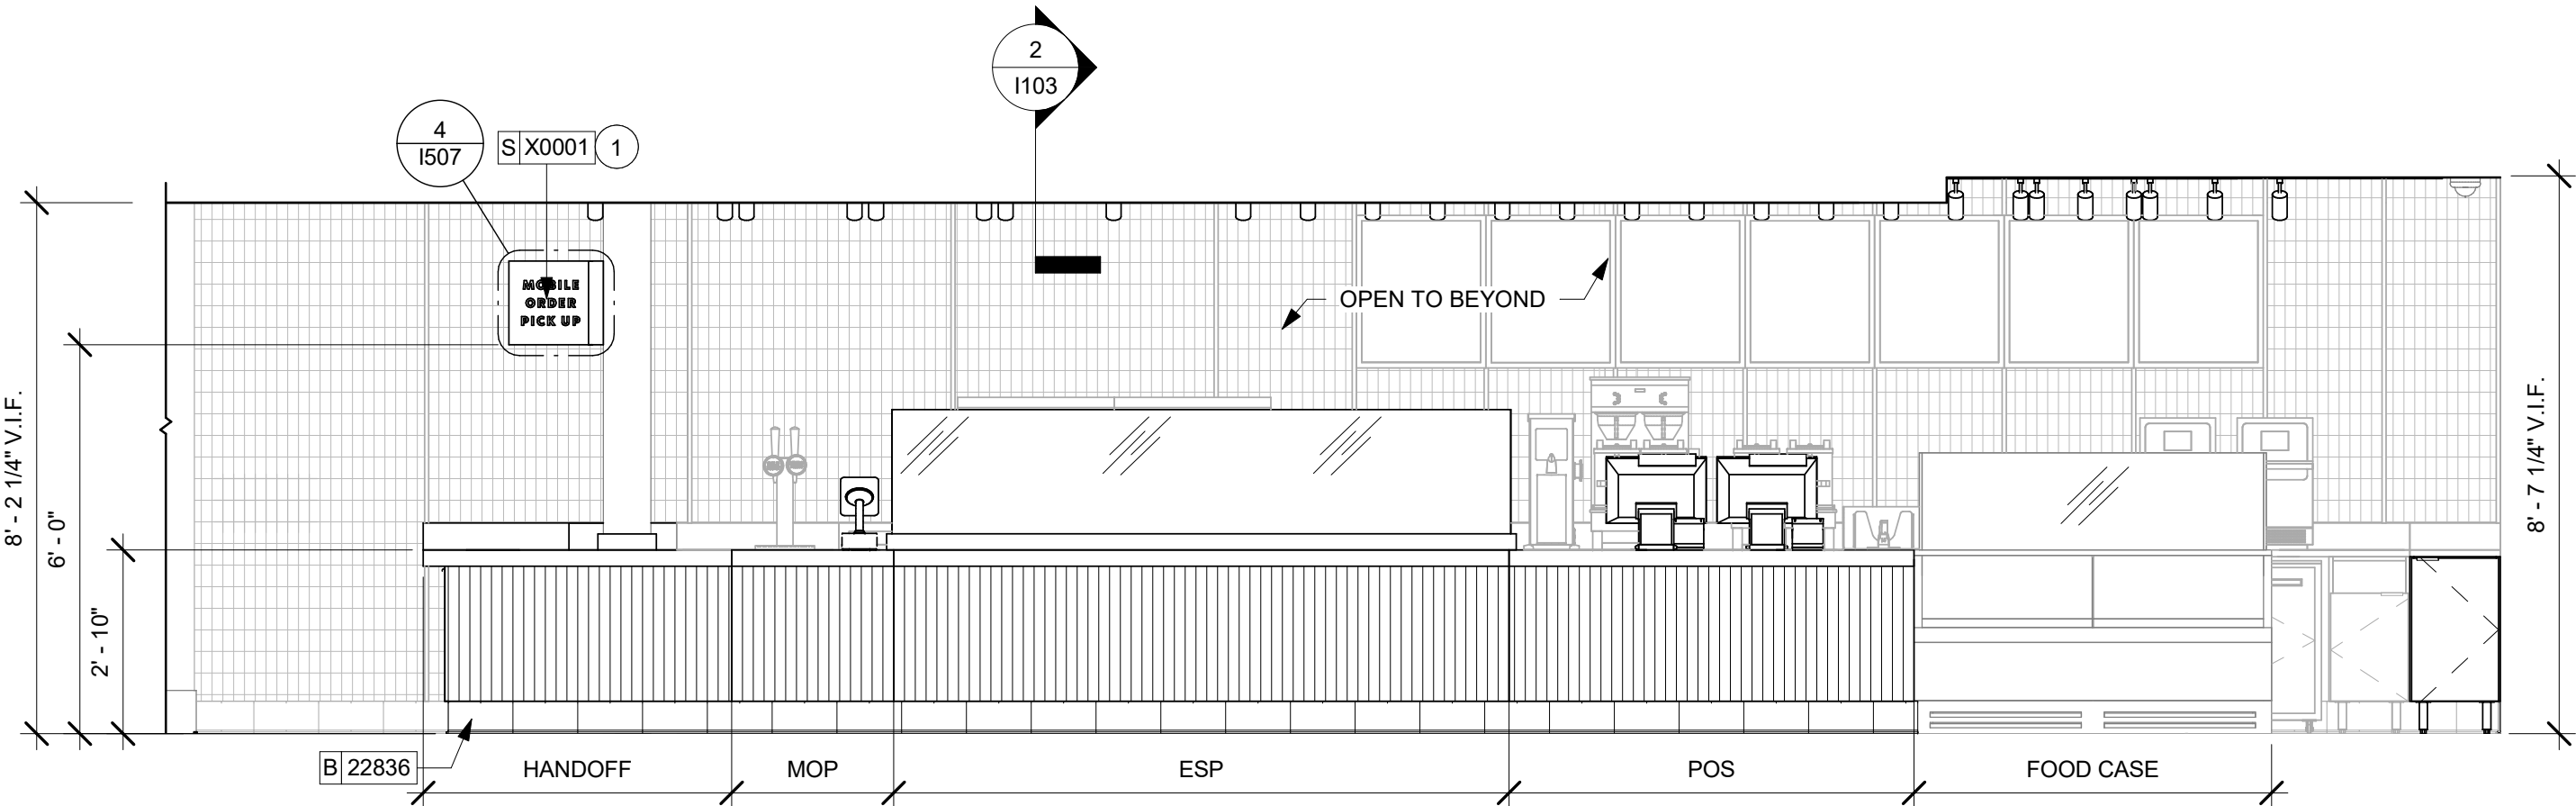

3 FRONTBAR ELEVATION

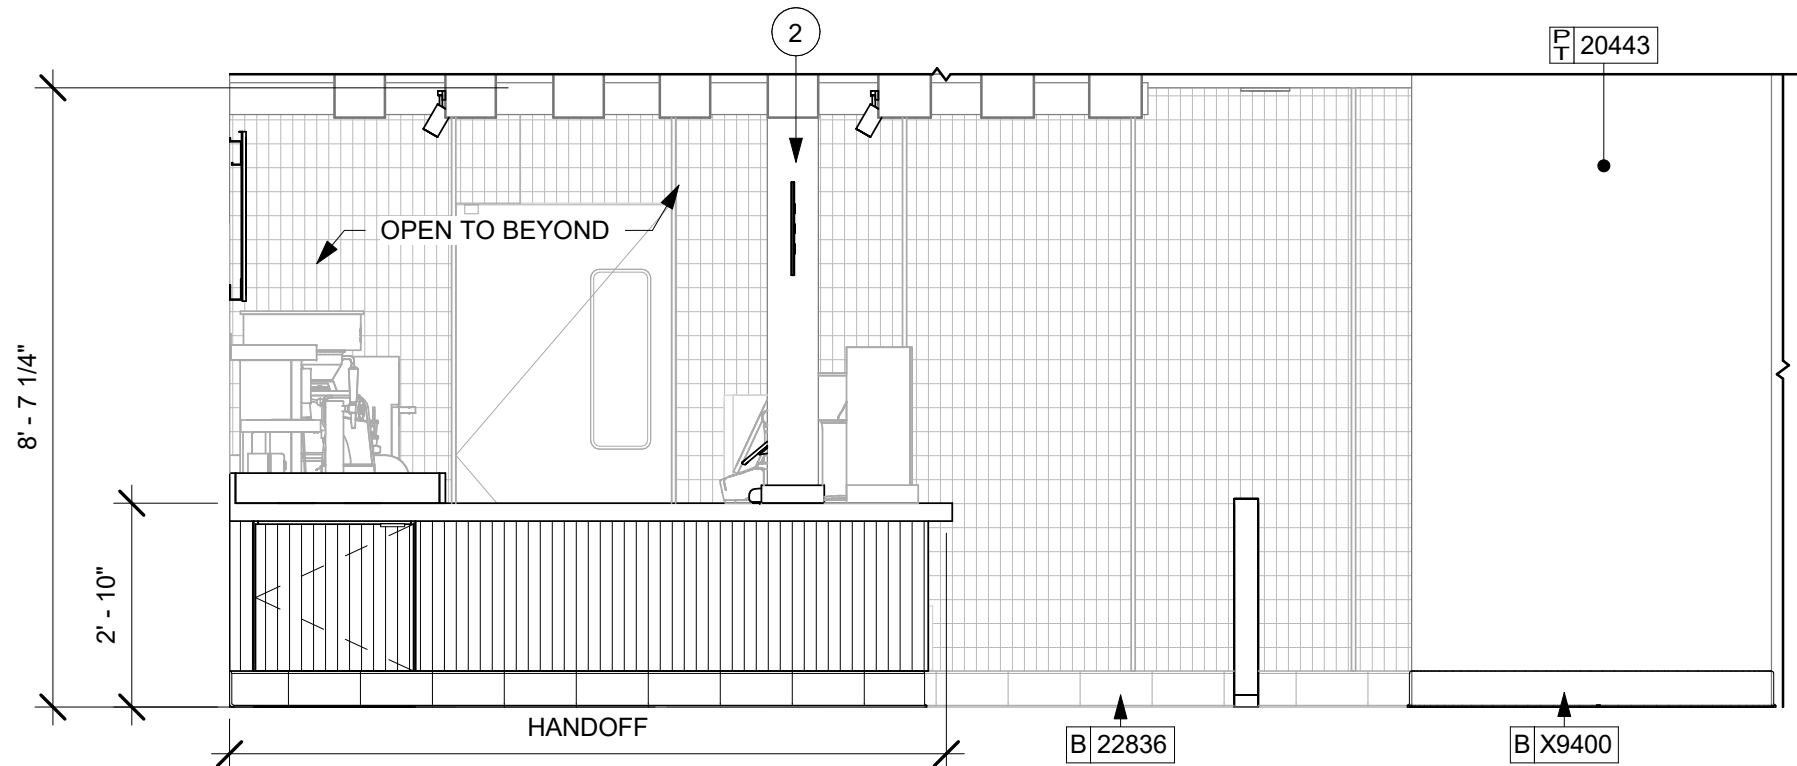

4 FRONTBAR SIDE ELEVATION

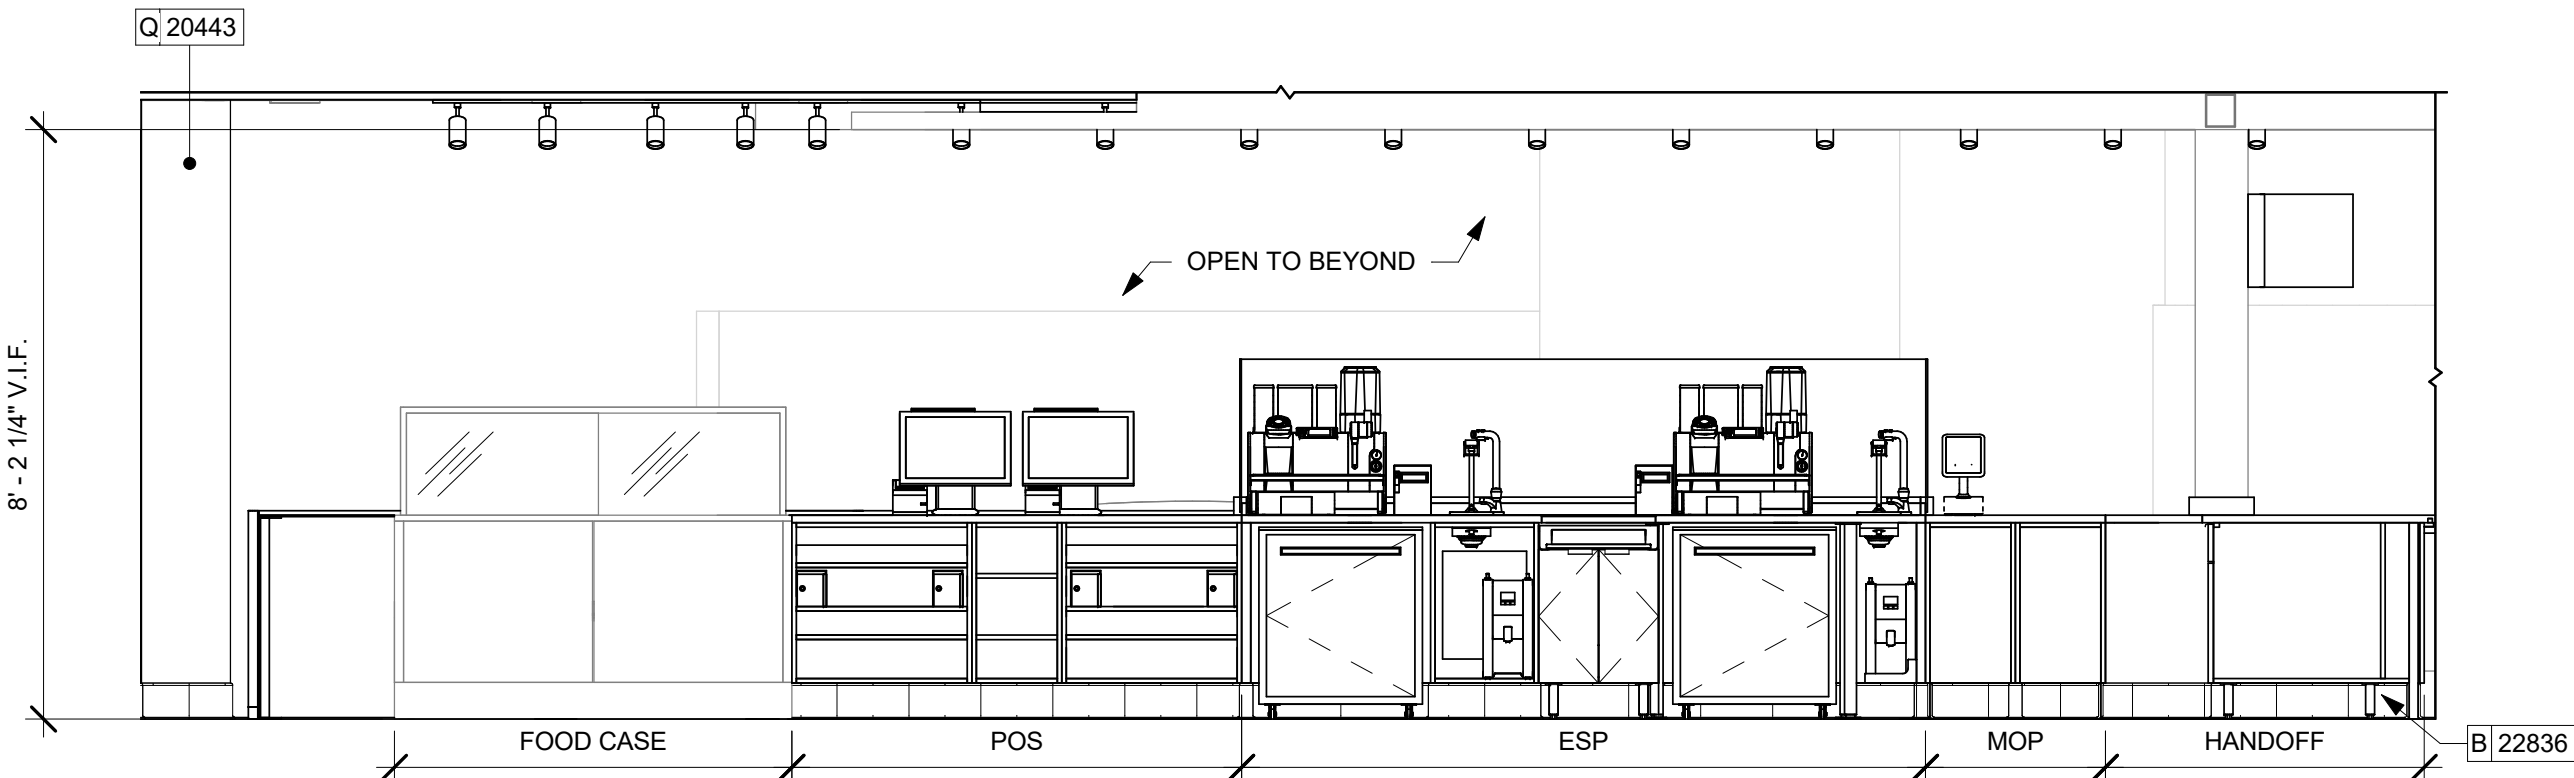

5 FRONTBAR - PARTNER SIDE ELEVATION


WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303


No. Date Issue By Check

Revisions


No. Date Revision By Check

INTERIOR FINISH
ELEVATIONS




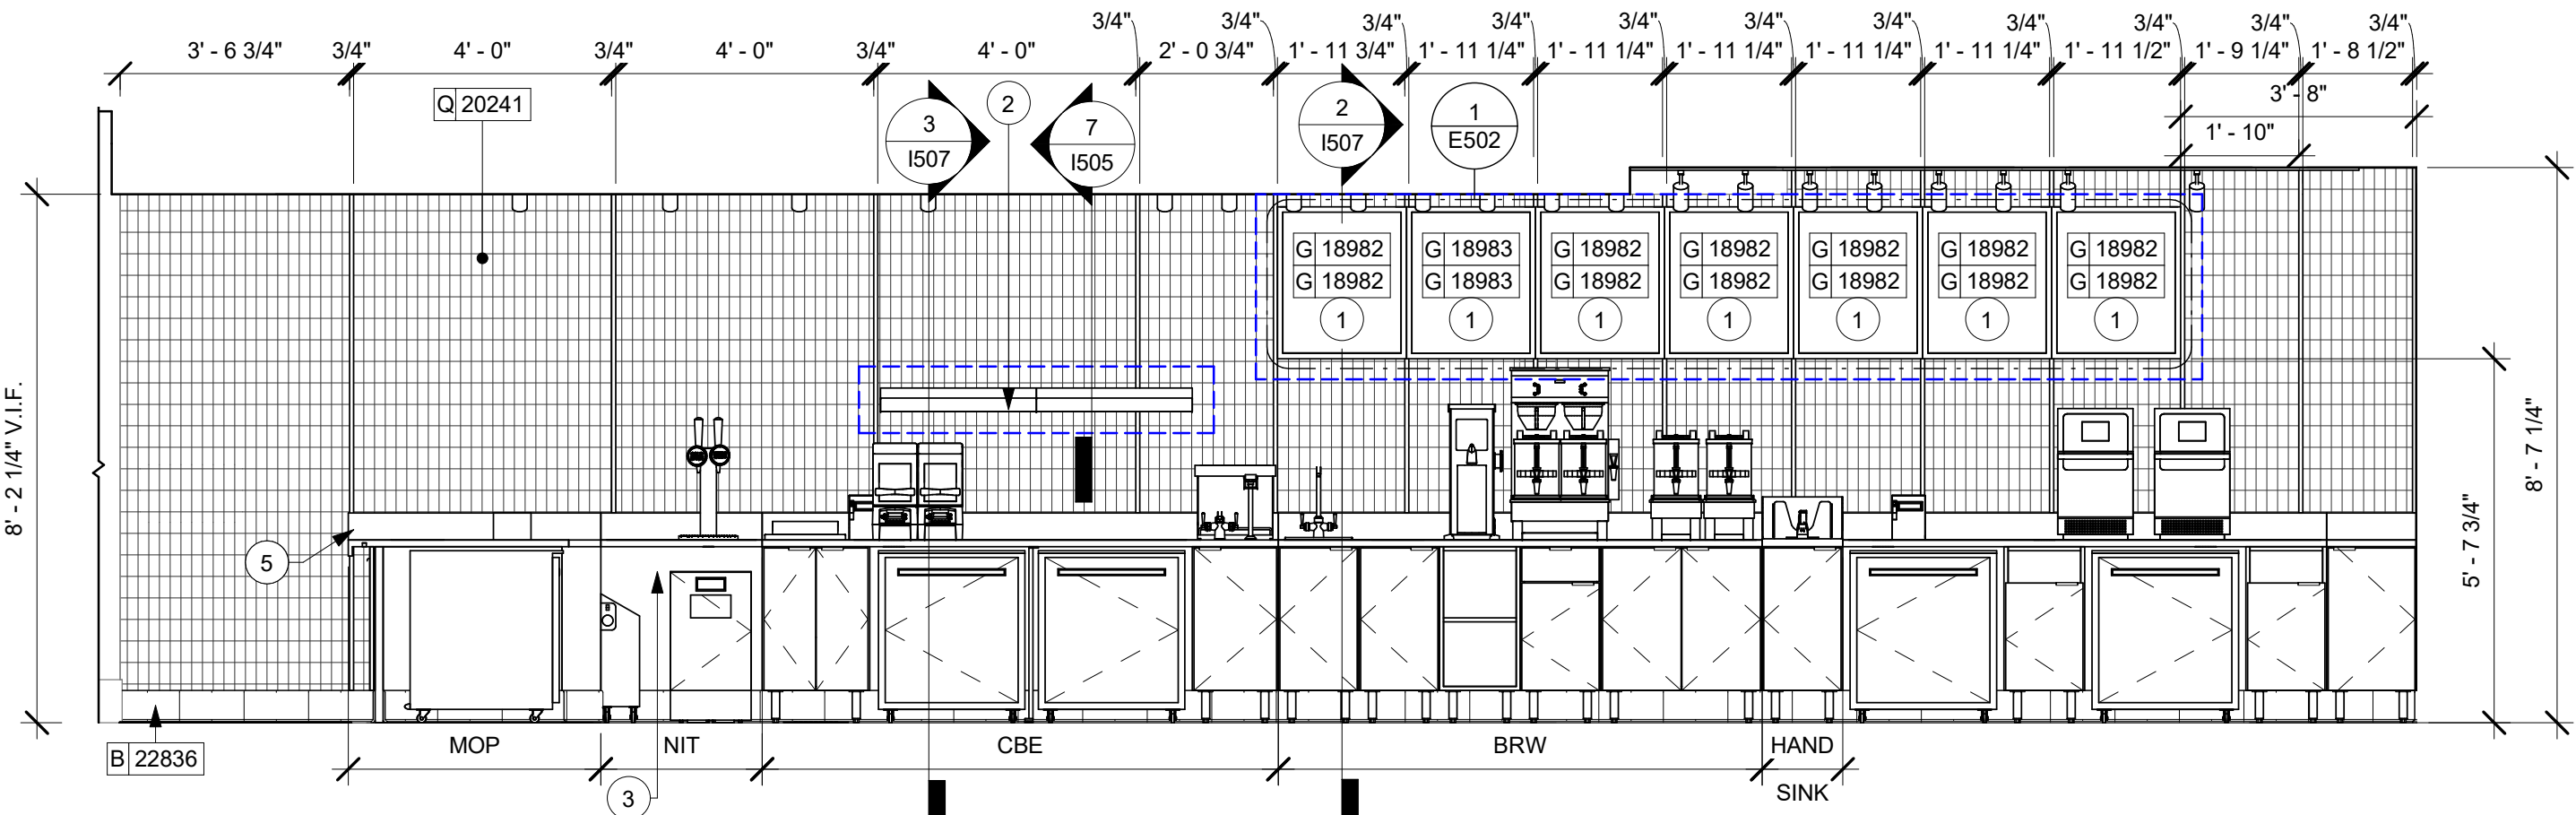


1 BACKBAR ELEVATION
Scale: 3/8" = 1'-0"

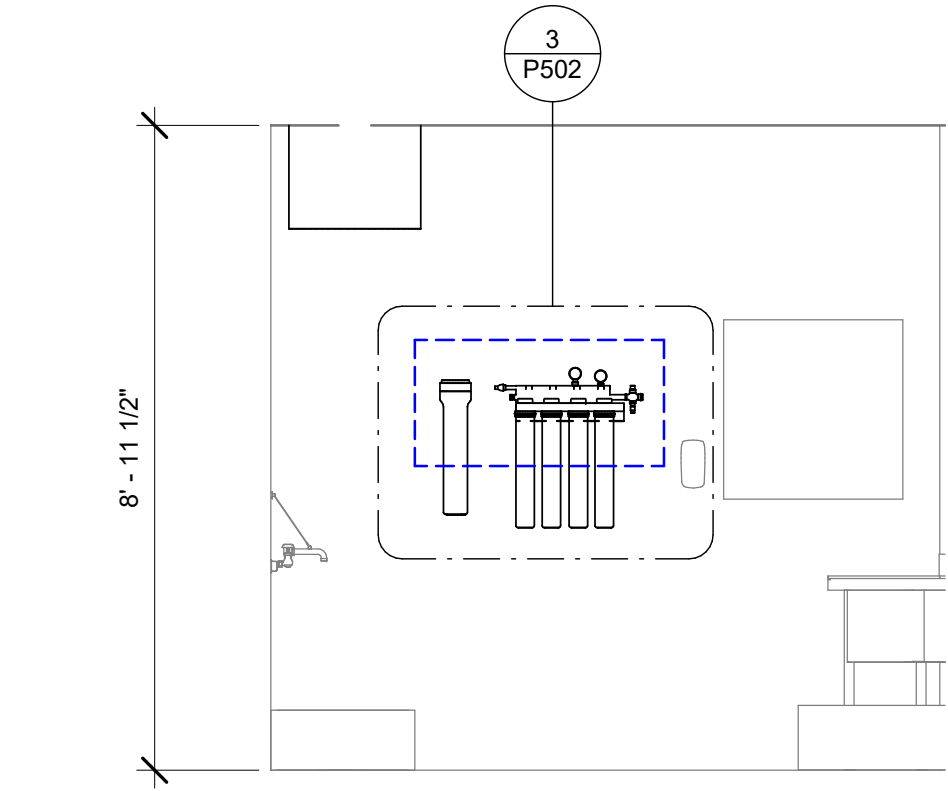

3 WORKROOM NORTH ELEVATION
Scale: 3/8" = 1'-0"

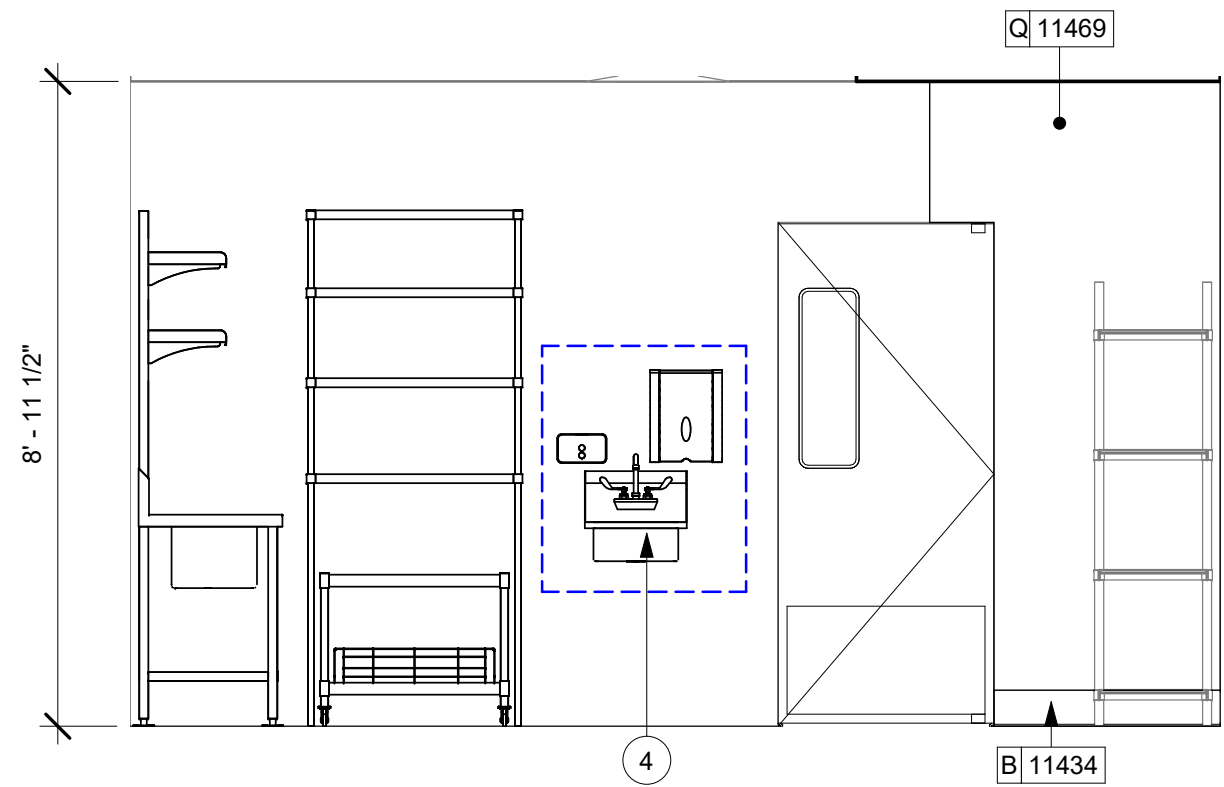

4 WORKROOM SOUTH ELEVATION
Scale: 3/8" = 1'-0"

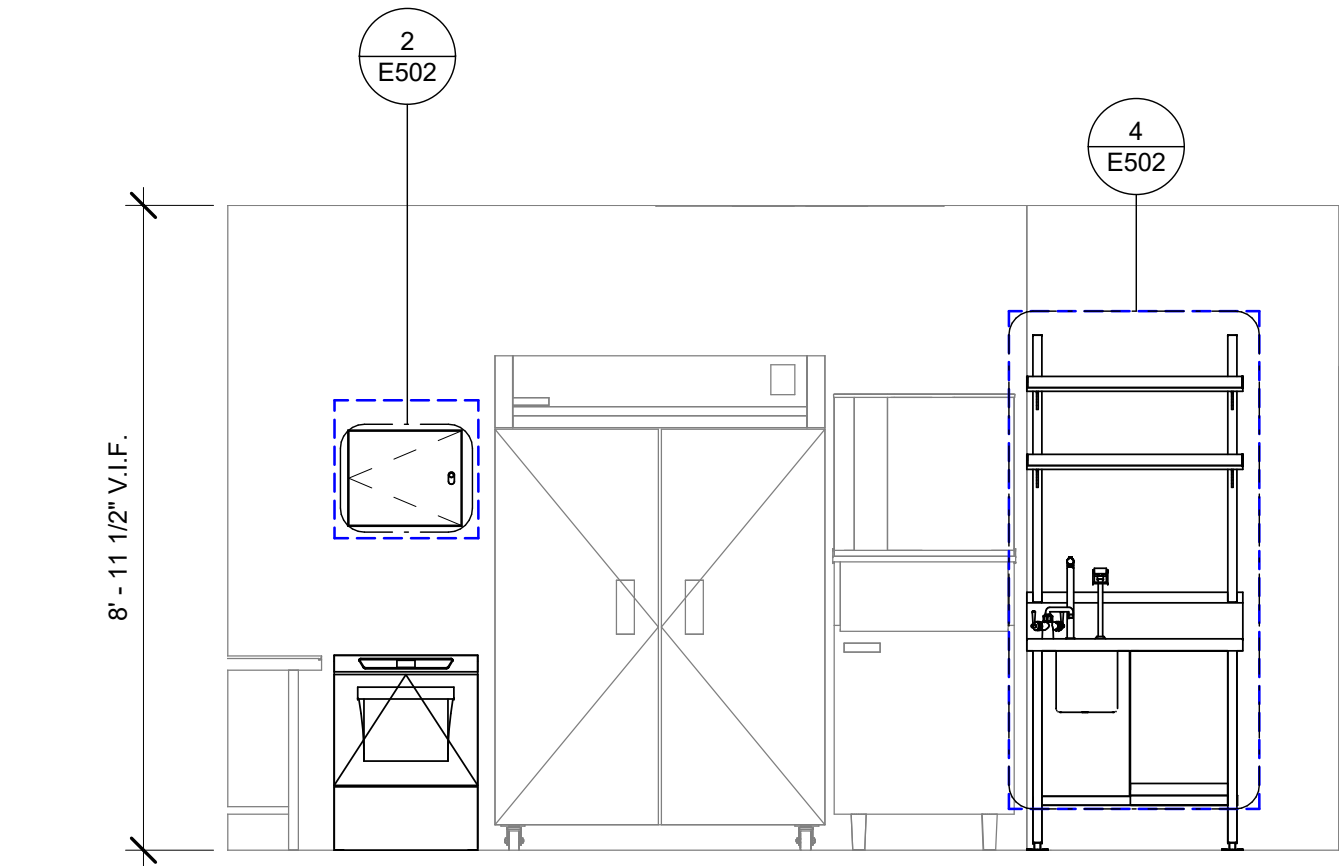

5 WORKROOM EAST ELEVATION
Scale: 3/8" = 1'-0"

KEYED NOTES

1. ATTACH MENU BOARDS PER INSTALLATION DETAILS.
2. SHELVING FOR CBE STATION AS SHOWN. GENERAL CONTRACTOR TO PROVIDE WALL BLOCKING FOR FASTENERS.
3. GENERAL CONTRACTOR TO PROVIDE AND INSTALL FRP WALL FINISH BEHIND CASEWORK CABINETS IN AREAS BELOW COUNTERTOP HEIGHT.
4. WALL MOUNT HAND SINK WITH SOAP AND PAPER TOWEL DISPENSER. ENSURE MOUNTING HEIGHTS CONFORM TO ACCESSIBILITY CODES. GENERAL CONTRACTOR TO PROVIDE BLOCKING FOR FASTENERS.
5. EDGE OF WALL TRIM TO ALIGN WITH THE FRONT FACE OF COUNTERTOP.

GENERAL NOTES

- A. FLOORS, WALL, AND CEILING FINISHES IN FOOD PREPARATION AREAS SHALL BE SMOOTH, NON-TOXIC, NON-ABSORBENT, DURABLE, AND EASILY CLEANABLE. PAINT IN THESE AREAS SHALL BE WASHABLE, SEMI-GLOSS OR HIGH GLOSS FINISH.
- B. CHANGE OF PAINT COLOR ONLY AT INSIDE CORNERS, UNLESS NOTED OTHERWISE.
- C. PAINT SUBSTITUTIONS ARE NOT ALLOWED. USE STARBUCKS NATIONAL SHERWIN WILLIAMS ACCOUNT "COLOR CODE" WHEN ORDERING PAINTS.
- D. PAINT FINISHES SHALL BE APPLIED AS FOLLOWS, UNLESS NOTED OTHERWISE:
 - 1) WOODS AND METAL SURFACES SHALL BE SEMI-GLOSS OR EQUAL.
 - 2) ACCENT AND TRIM PAINTS SHALL BE SEMI-GLOSS OR EQUAL.
 - 3) WALL AND CEILING PAINTS SHALL BE EGGSHELL OR EQUAL.
 - 4) PAINTS IN WORKROOM RESTROOM(S) OR CAFE BAR SHALL BE SEMI-GLOSS OR EQUAL.
- E. REFER TO INTERIOR WALL FINISH PLAN SHEET I106 FOR PAINT SCHEDULE AND WALL FINISH SCHEDULE.
- F. WORKROOM TO BE FINISHED PER LOCAL CODE. GENERAL CONTRACTOR TO PROVIDE AND INSTALL WORKROOM WALL FINISHES.
- G. ALL WOOD SURFACES (DOORS, TRIM, SHELVES, CABINETRY) SHALL BE SEALED.
- H. ALL FLOOR AND WALL JUNCTIONS IN STORAGE AND FOOD PREPARATION AREAS SHALL HAVE A 6" COVED BASE.
- I. GENERAL CONTRACTOR TO INSTALL WALL BLOCKING AND HANGERS FOR WALL SHELVING BEFORE INSTALLING BACK BAR WALL TILE.
- J. REFER TO MANUFACTURER'S INSTRUCTIONS INCLUDED WITH ARTWORK / GRAPHICS FOR PROPER INSTALLATION.

LEGEND

- INDICATES WALL BLOCKING.
FIRE TREATED WALL BLOCKING TO BE PROVIDED AS REQUIRED TO SUPPORT WALL ATTACHMENTS. EXTEND BLOCKING 4" (100mm) BEYOND EDGE OF ATTACHMENTS.

WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303

No.	Date	Issue	By	Check
-----	------	-------	----	-------


Revisions

No.	Date	Revision	By	Check
-----	------	----------	----	-------

INTERIOR FINISH
ELEVATIONS




ARCHITECT AND/OR ENGINEER OF RECORD
TO VERIFY, SPECIFY AND PLACE ALL
ELECTRICAL AND PLUMBING COMPONENTS.

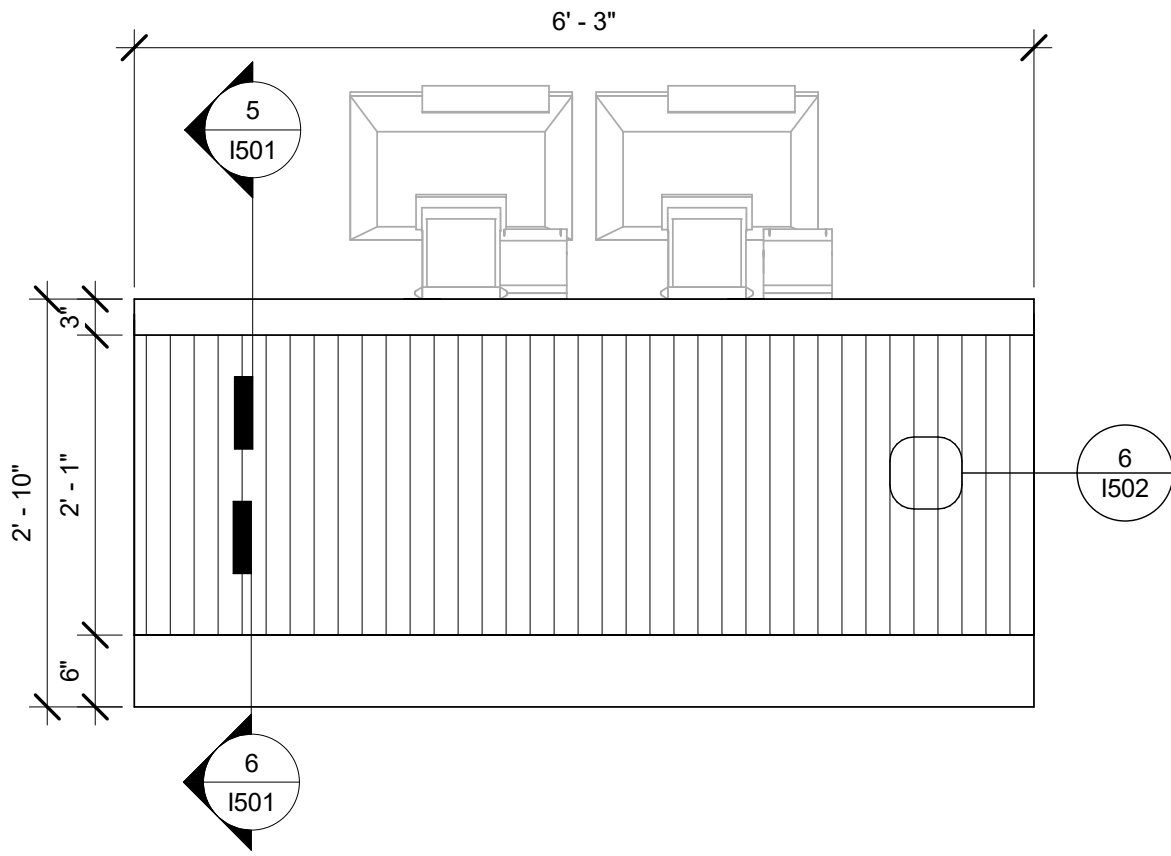


1 POS - FRONT ELEVATION

Scale: 3/4" = 1'-0"

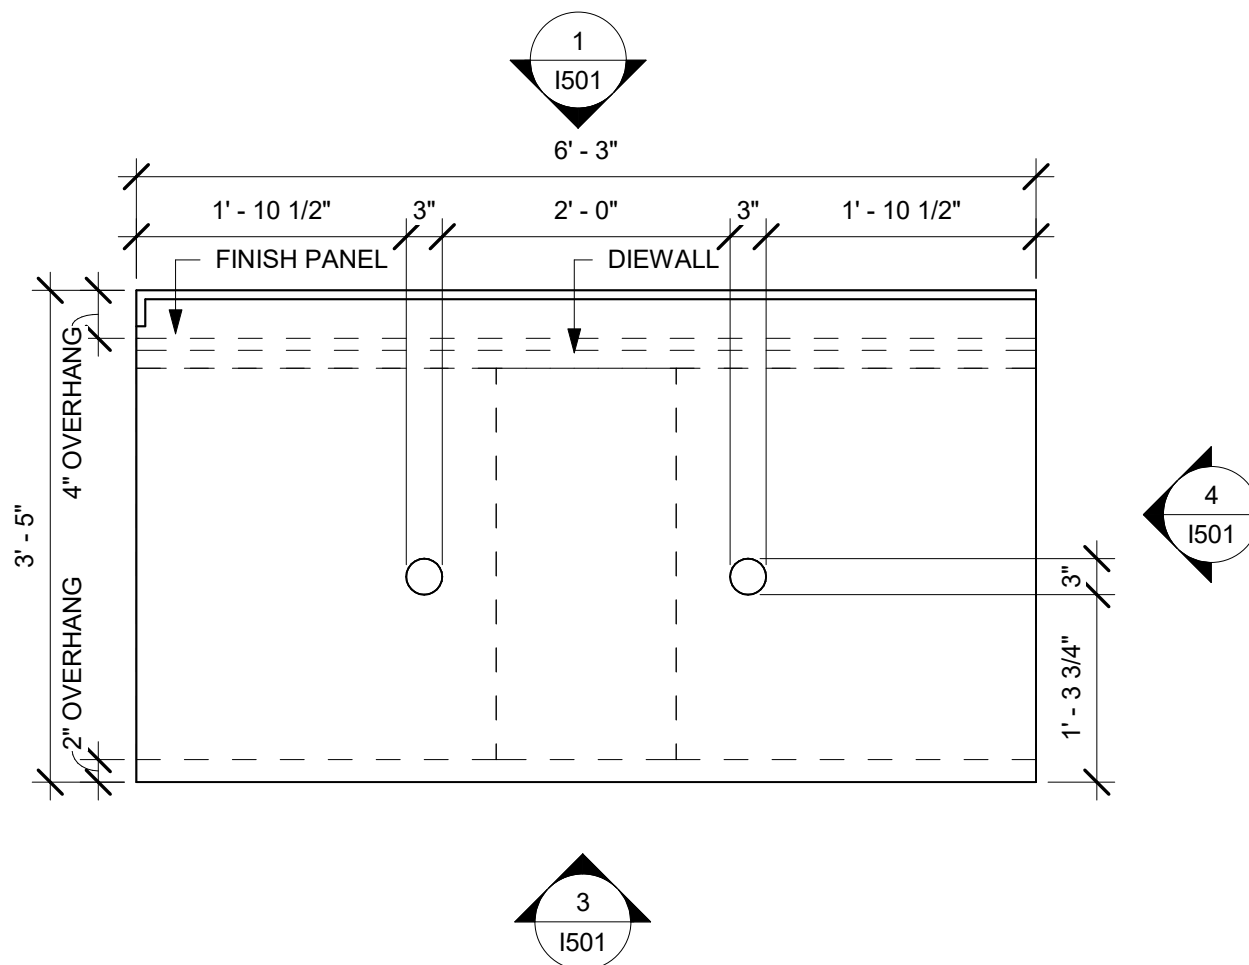


2 POS - PLAN VIEW

Scale: 3/4" = 1'-0"

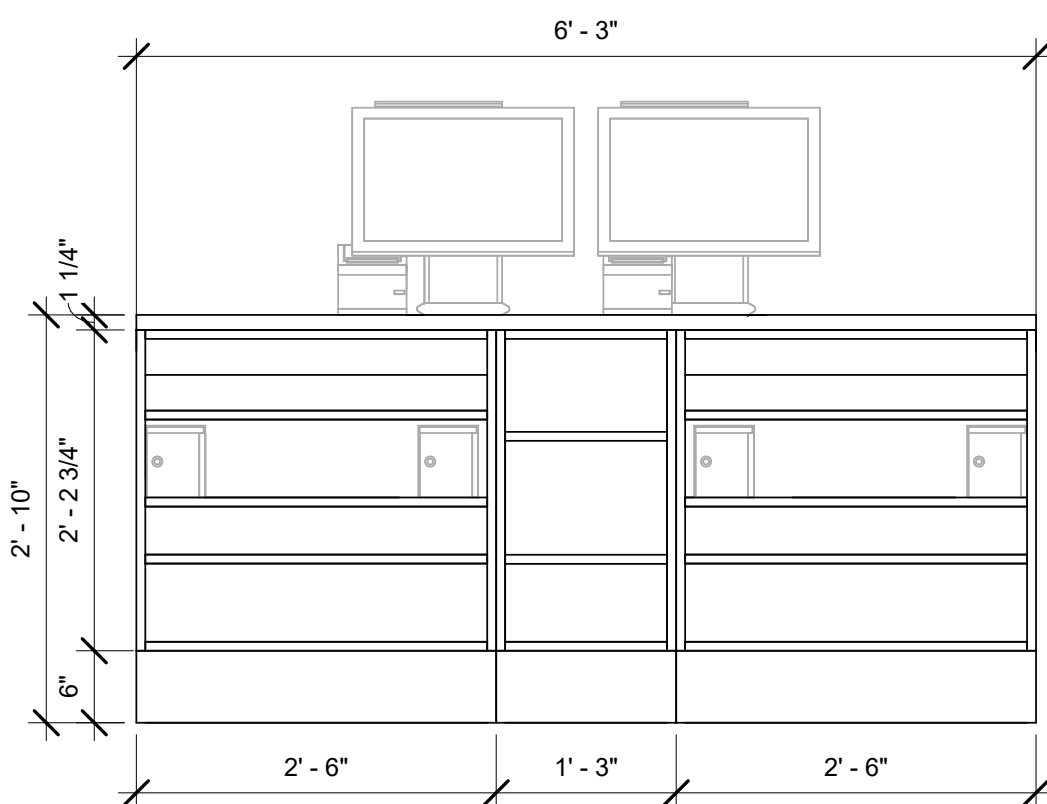


3 POS - BACK ELEVATION

Scale: 3/4" = 1'-0"

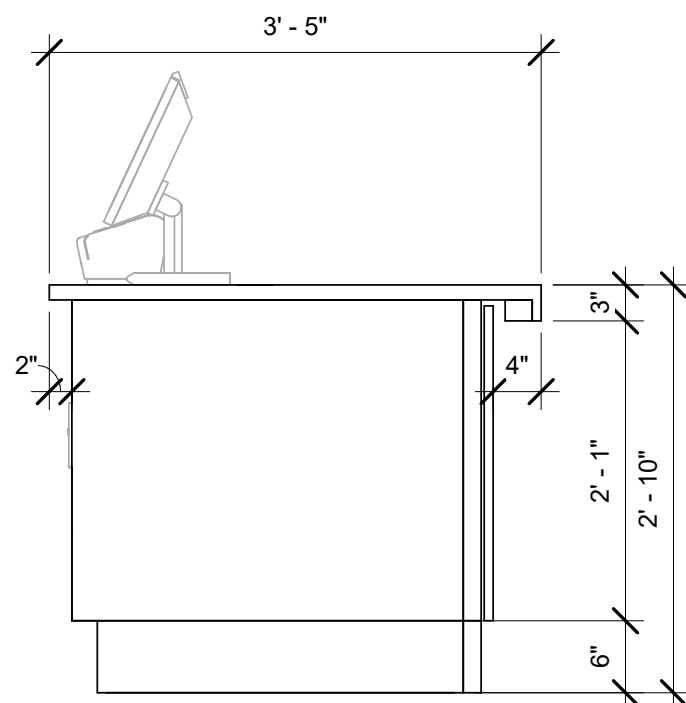


4 POS - SIDE ELEVATION

Scale: 3/4" = 1'-0"

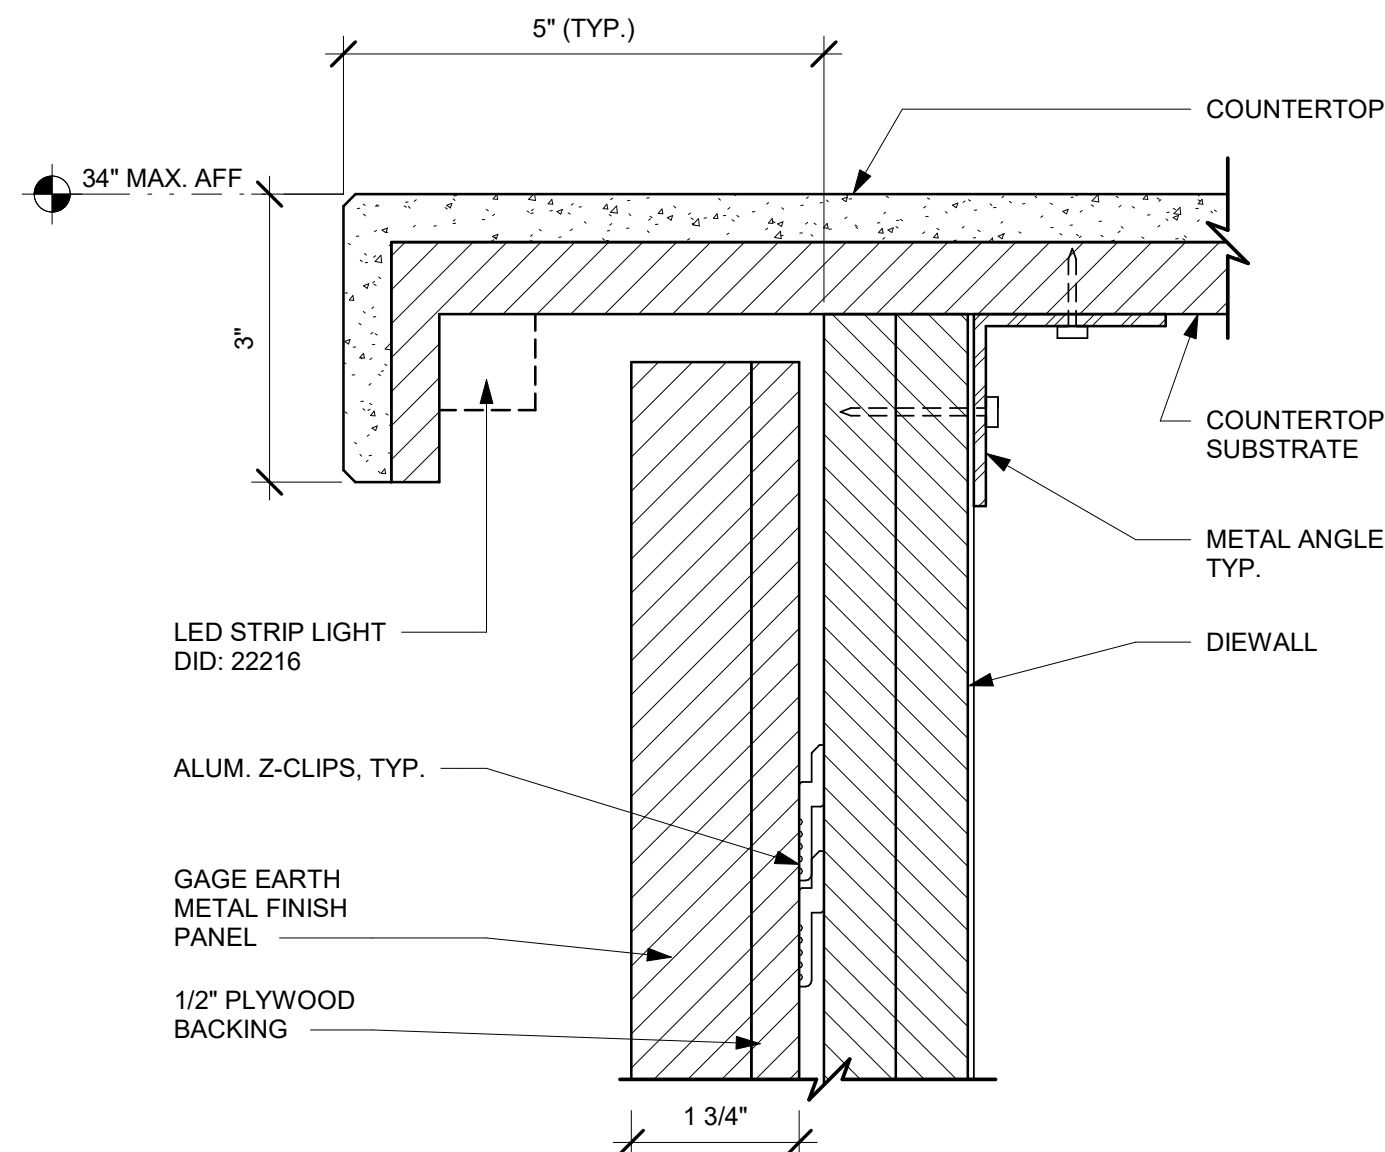

5 FINISH PANEL - BUILT-UP COUNTERTOP OVERHANG

Scale: 6" = 1'-0"

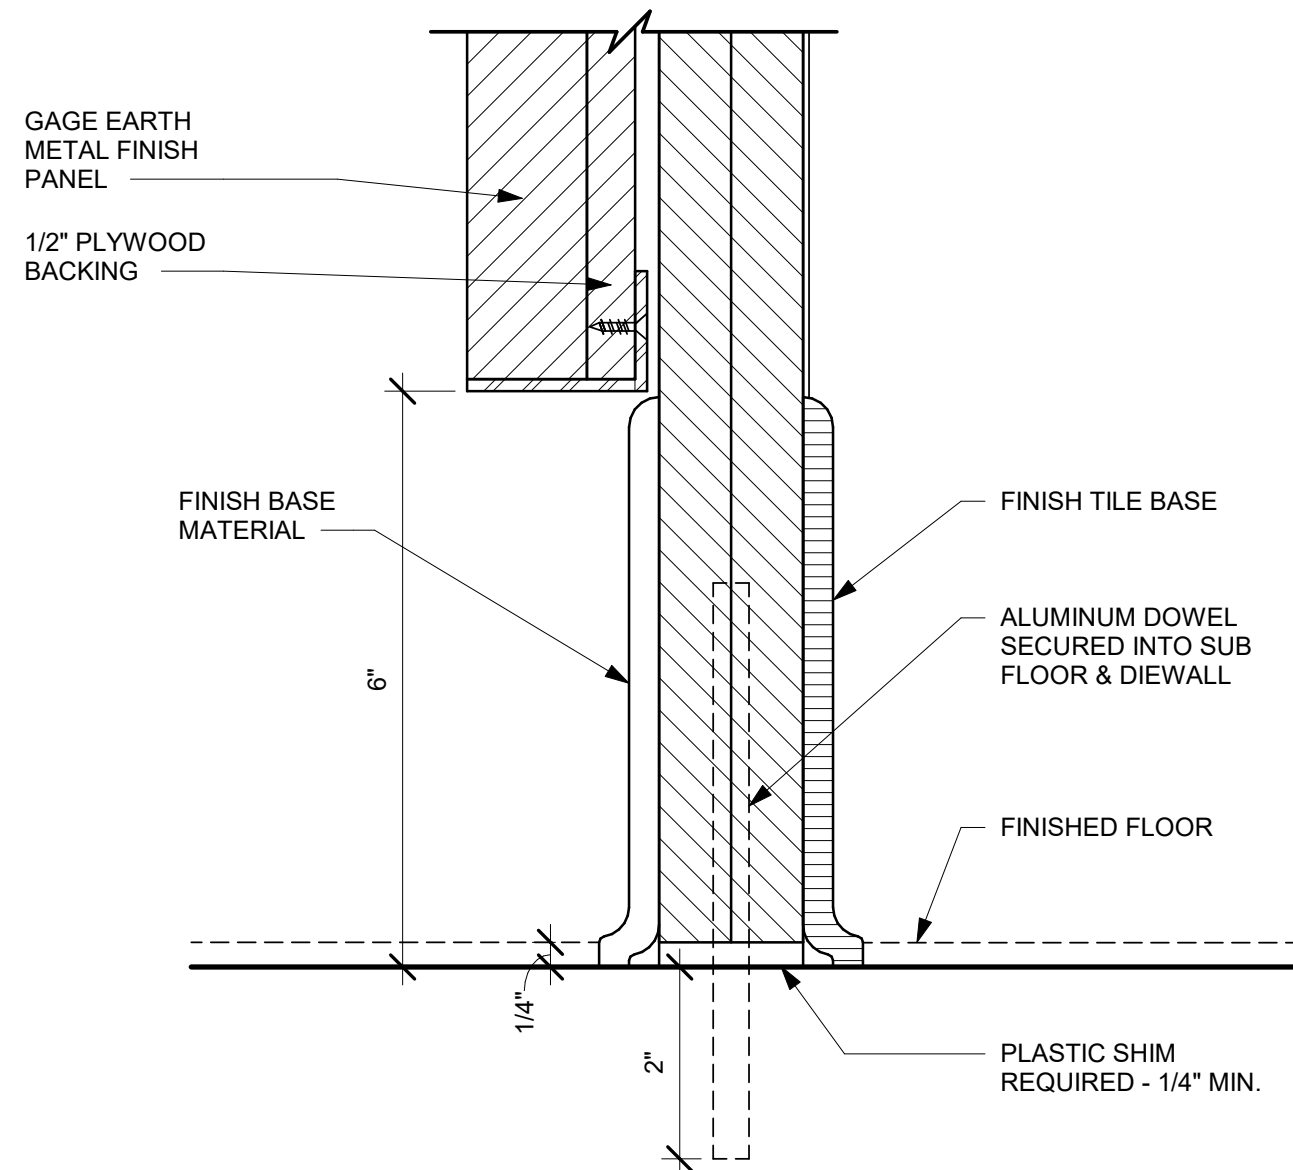

6 FINISH PANEL - 6" BASE

Scale: 6" = 1'-0"

WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303

No. Date Issue By Check


Revisions

No. Date Revision By Check

INTERIOR DETAILS


I501



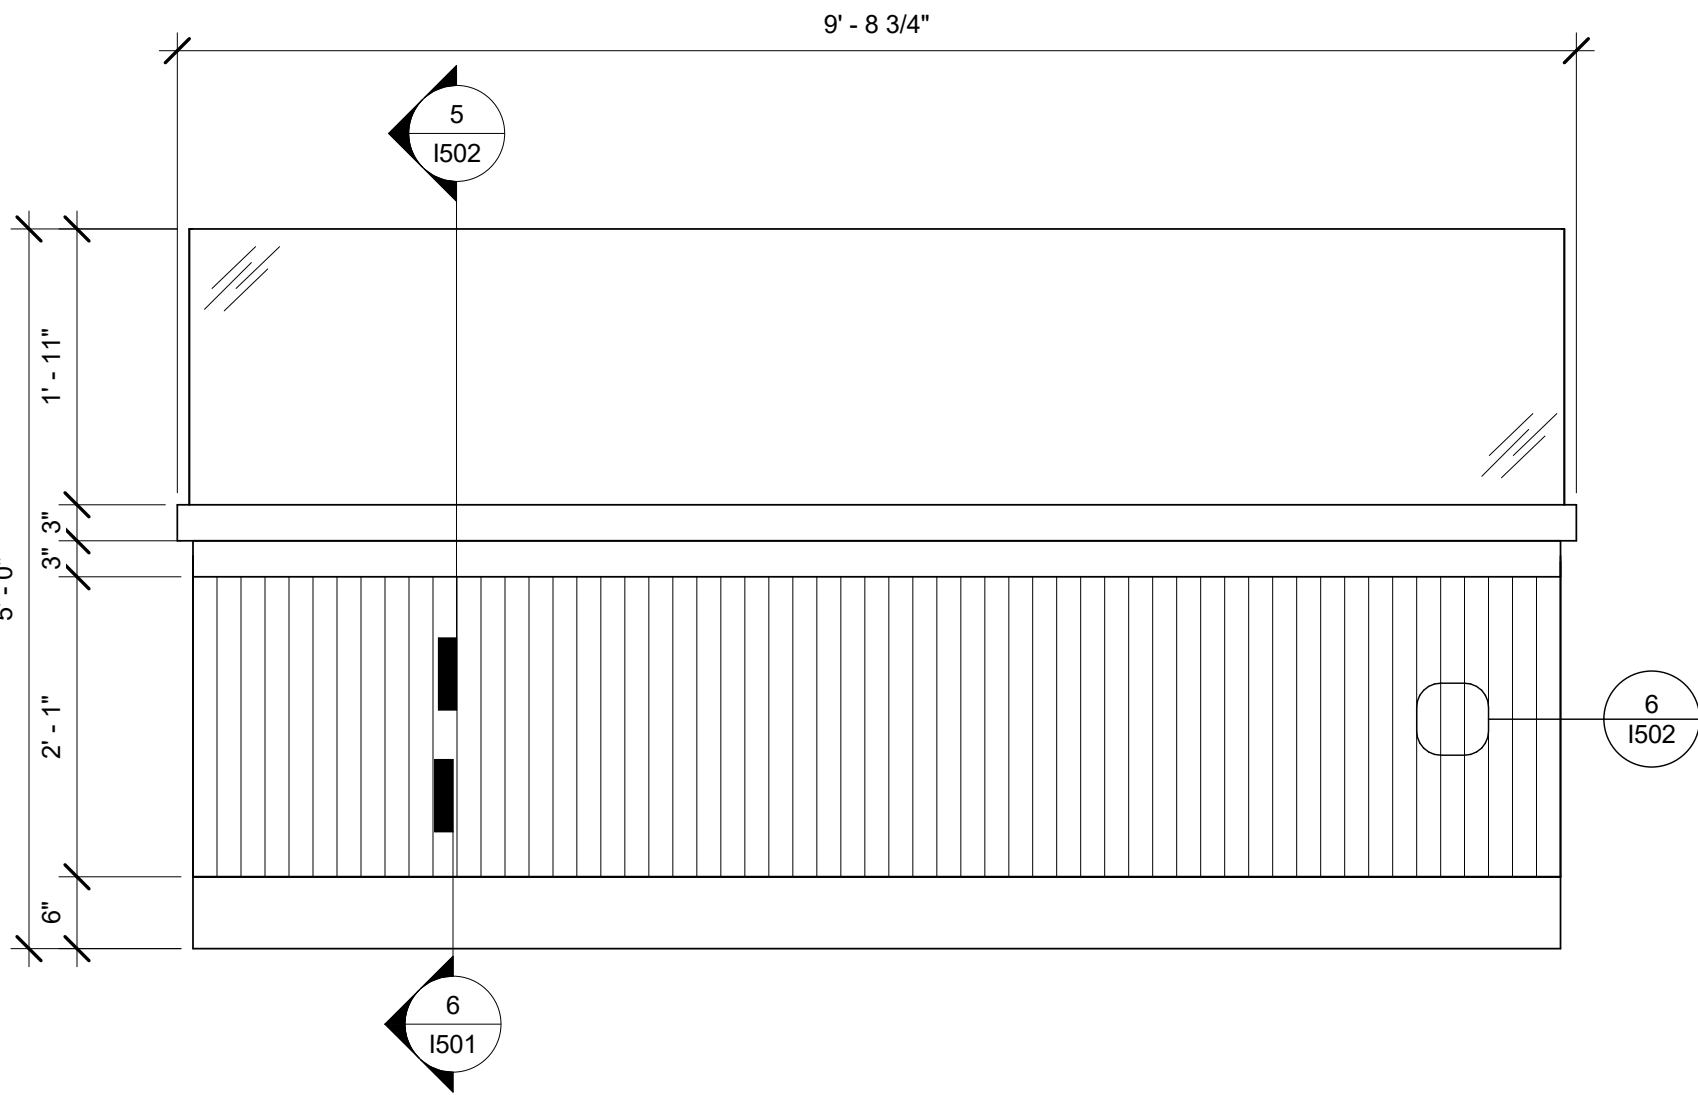


1 ESP - FRONT ELEVATION

Scale: 3/4" = 1'-0"

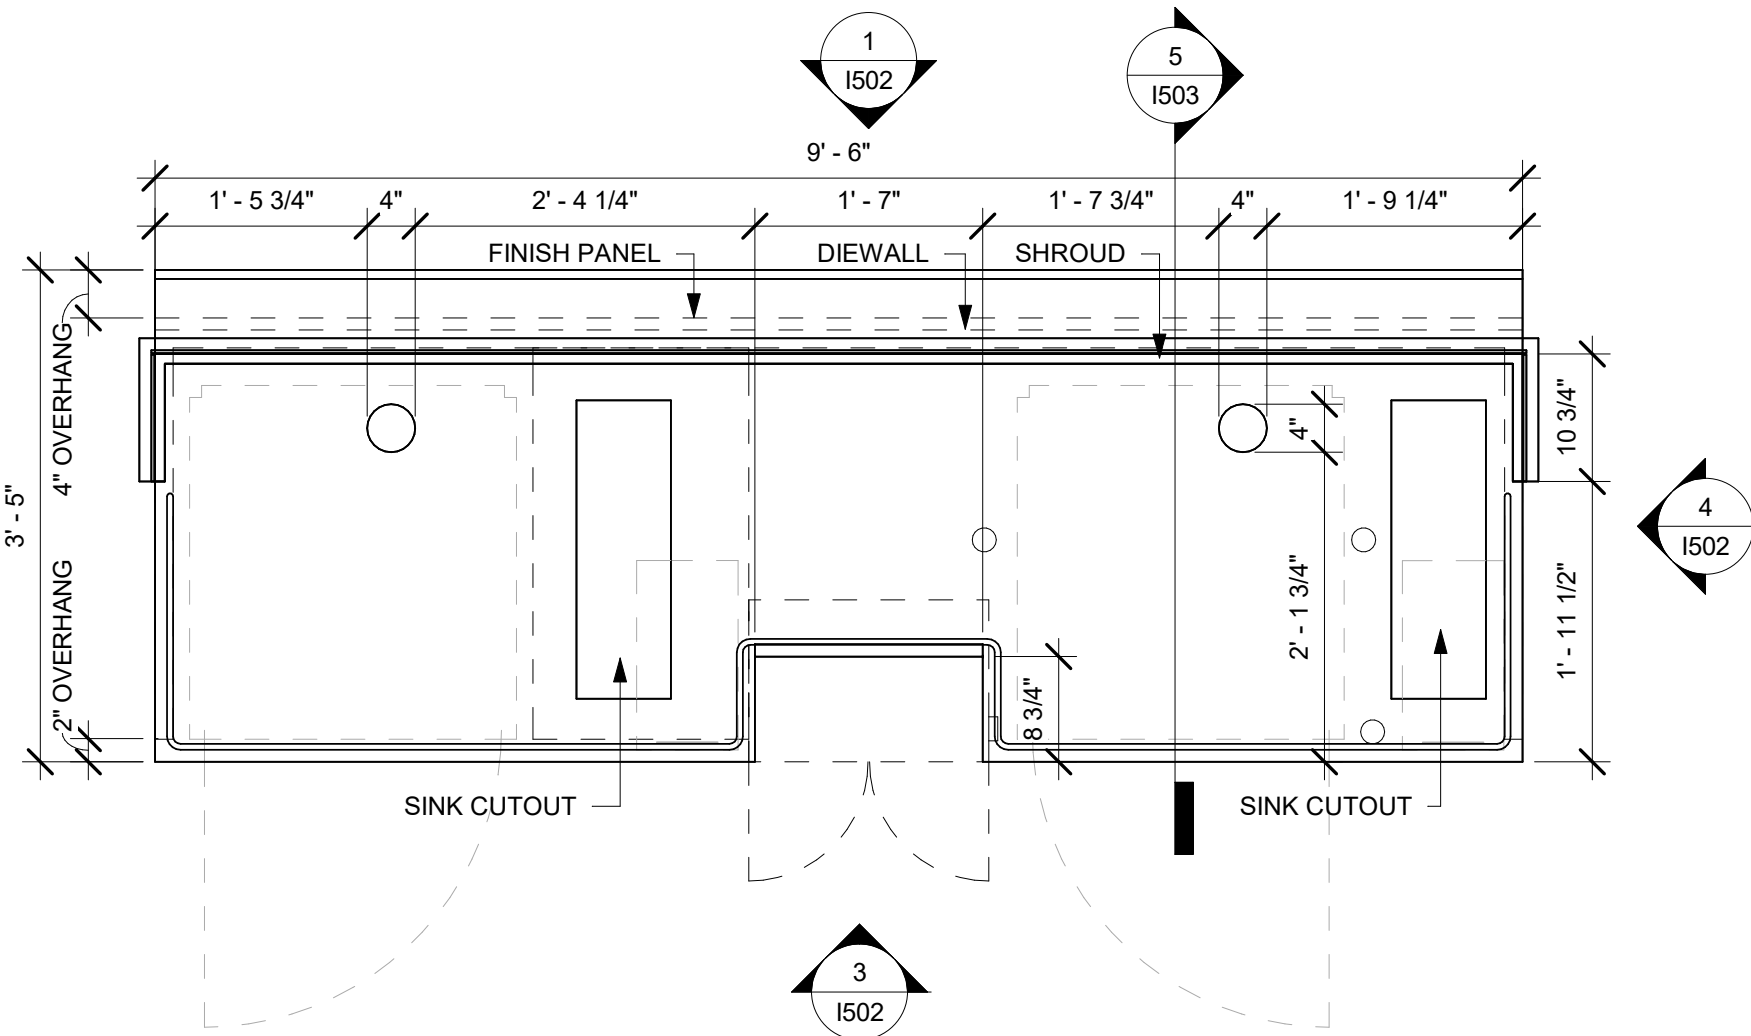


2 ESP - PLAN VIEW

Scale: 3/4" = 1'-0"

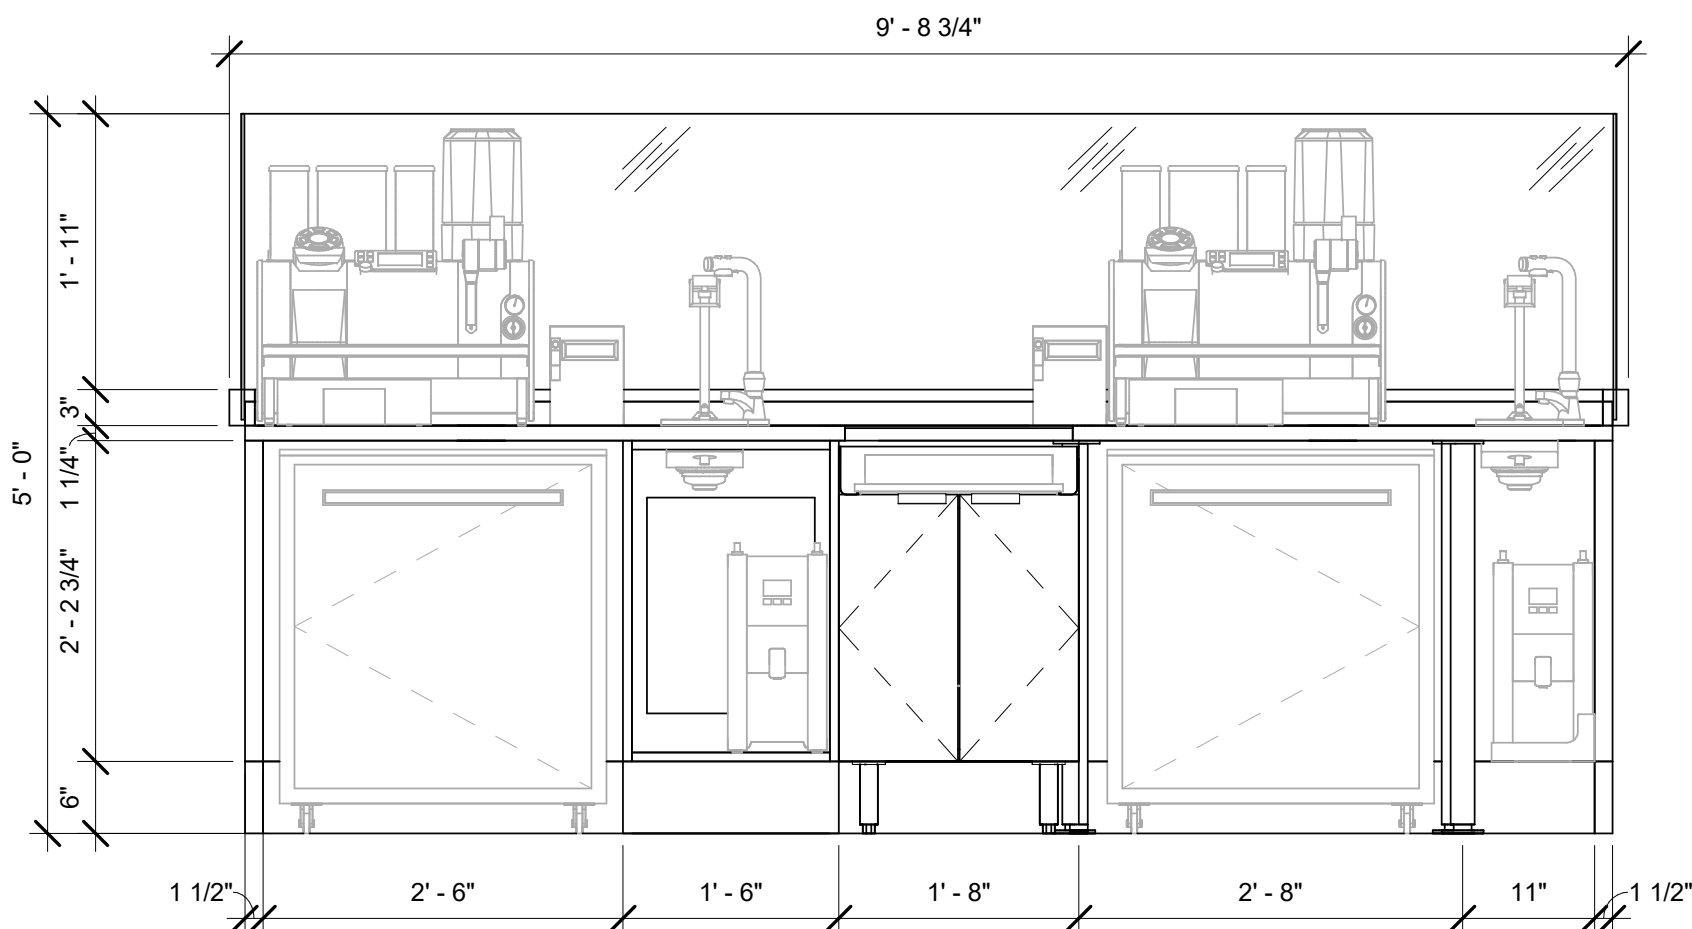

3 ESP - BACK ELEVATION


Scale: 3/4" = 1'-0"

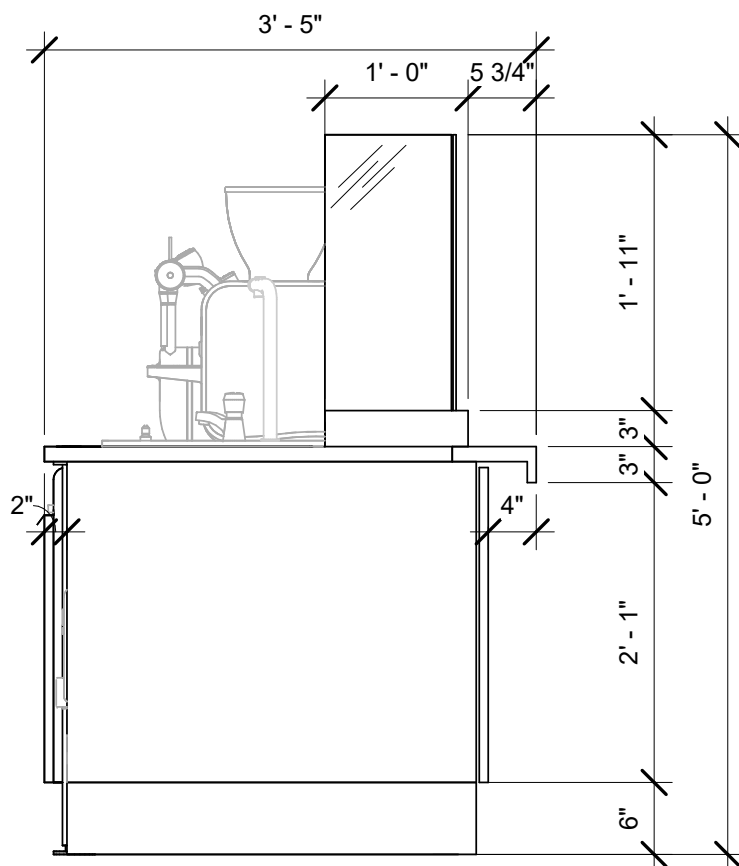

4 ESP - SIDE ELEVATION


Scale: 3/4" = 1'-0"

ARCHITECT AND/OR ENGINEER OF RECORD
TO VERIFY, SPECIFY AND PLACE ALL
ELECTRICAL AND PLUMBING COMPONENTS.

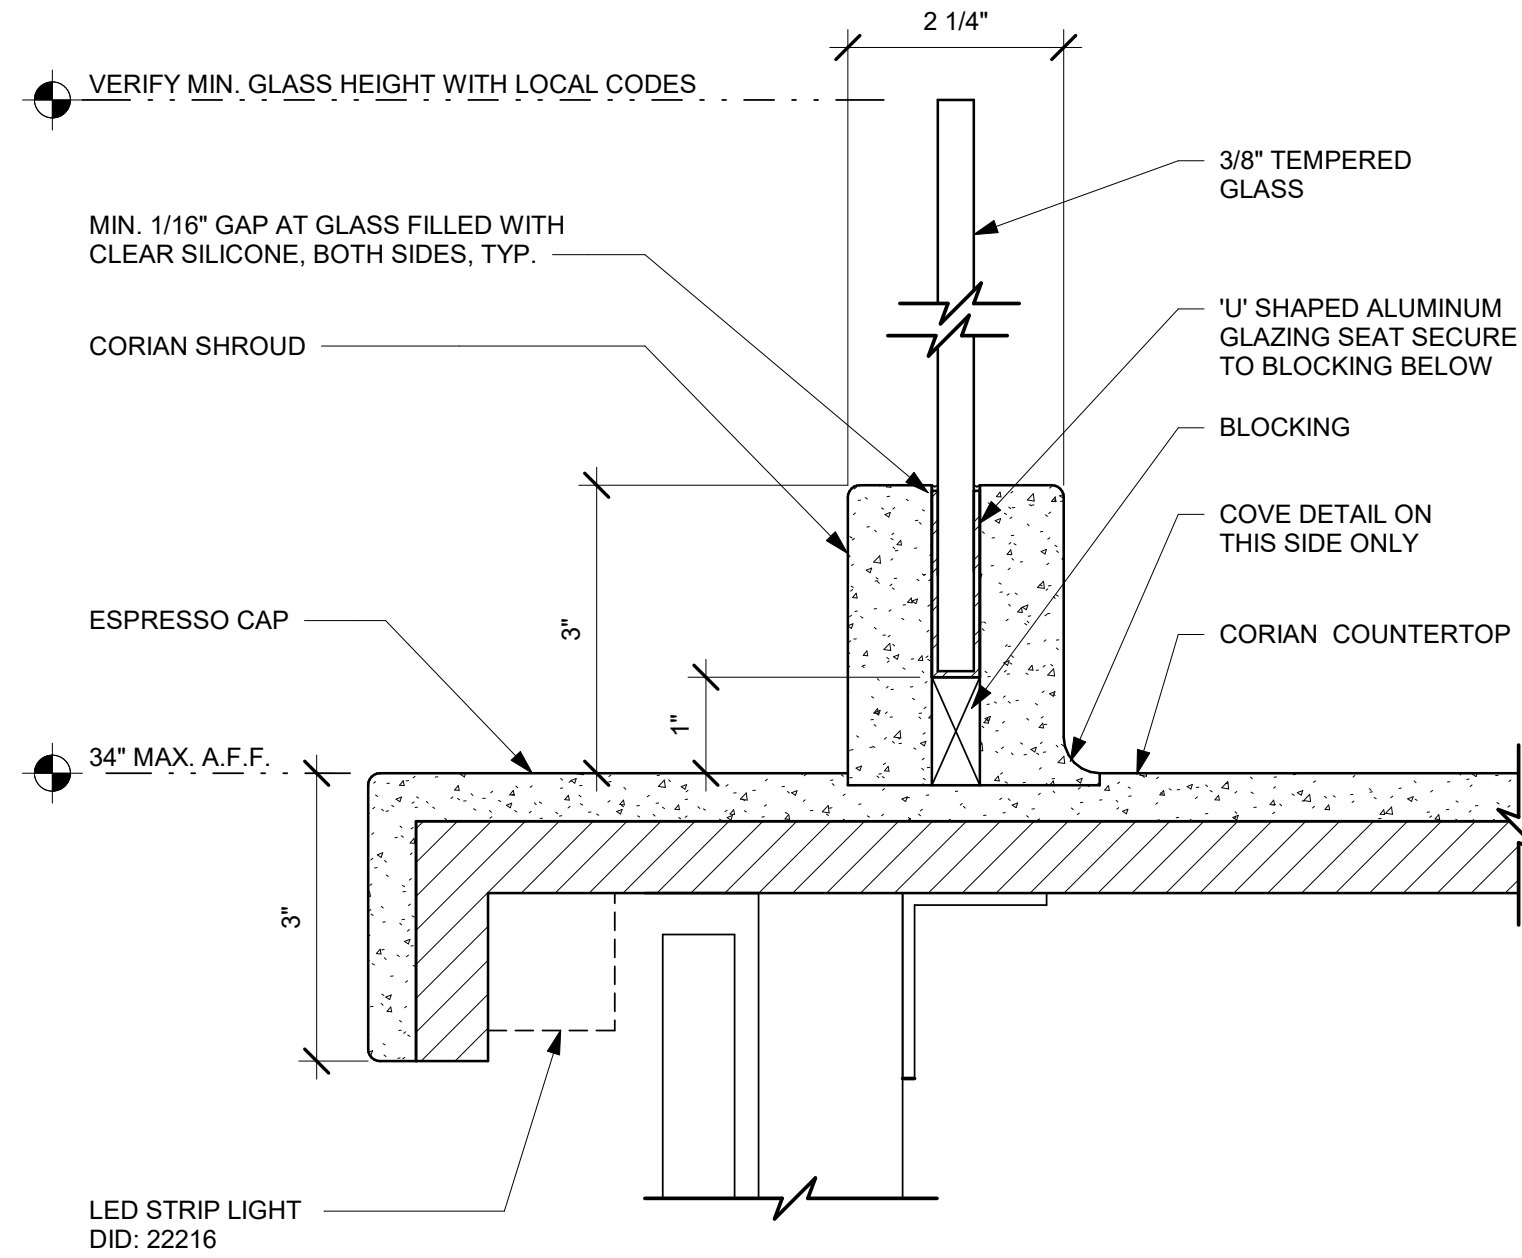


5 ESP SHROUD - CORIAN WITH SNEEZE GUARD

Scale: 6" = 1'-0"

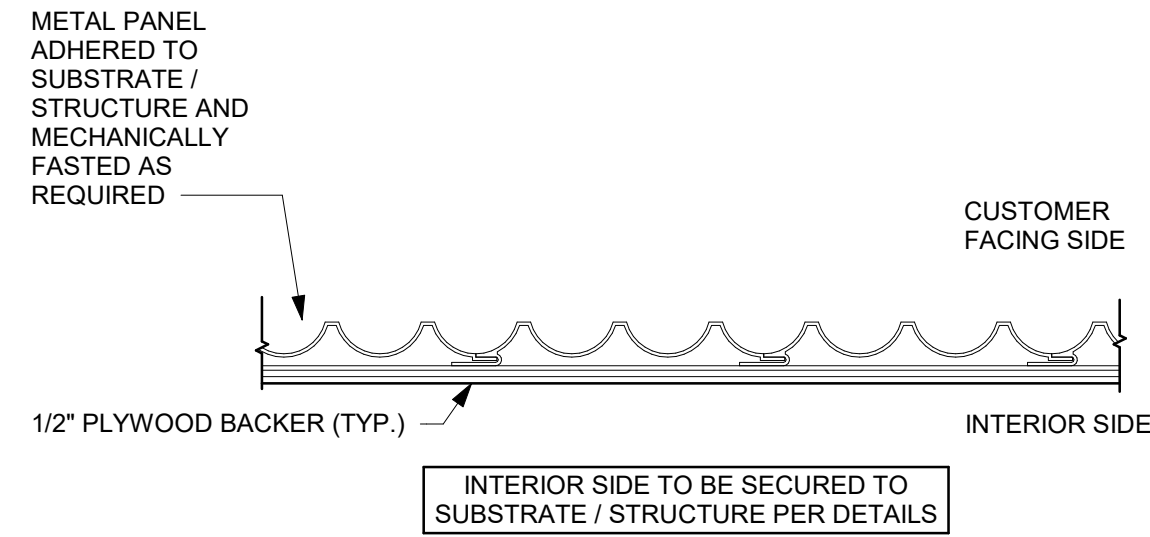

A ENLARGED SECTION PROFILE

NOT TO SCALE

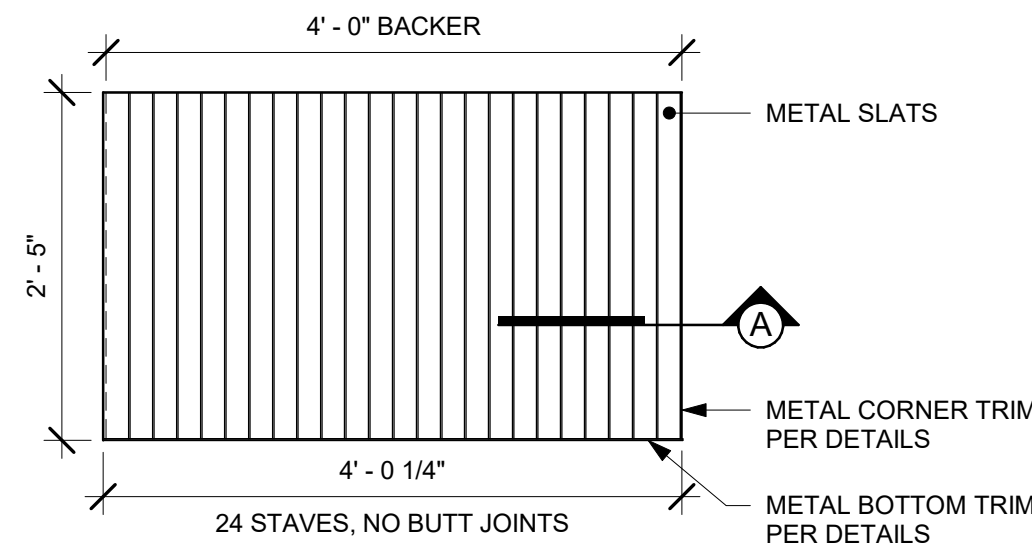

ELEVATION

6 FINISH APPLICATION - CUSTOM

Scale: 3/4" = 1'-0"

WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303

No. Date Issue By Check

Revisions


No. Date Revision By Check

INTERIOR DETAILS


I502




ARCHITECT AND/OR ENGINEER OF RECORD
TO VERIFY, SPECIFY AND PLACE ALL
ELECTRICAL AND PLUMBING COMPONENTS.

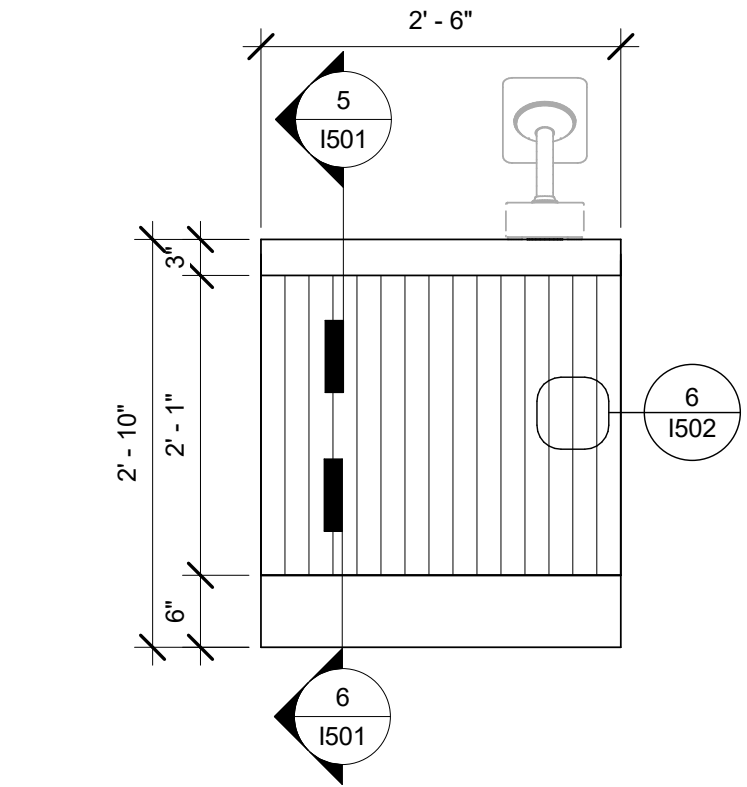


1 MOP - FRONT ELEVATION
Scale: 3/4" = 1'-0"

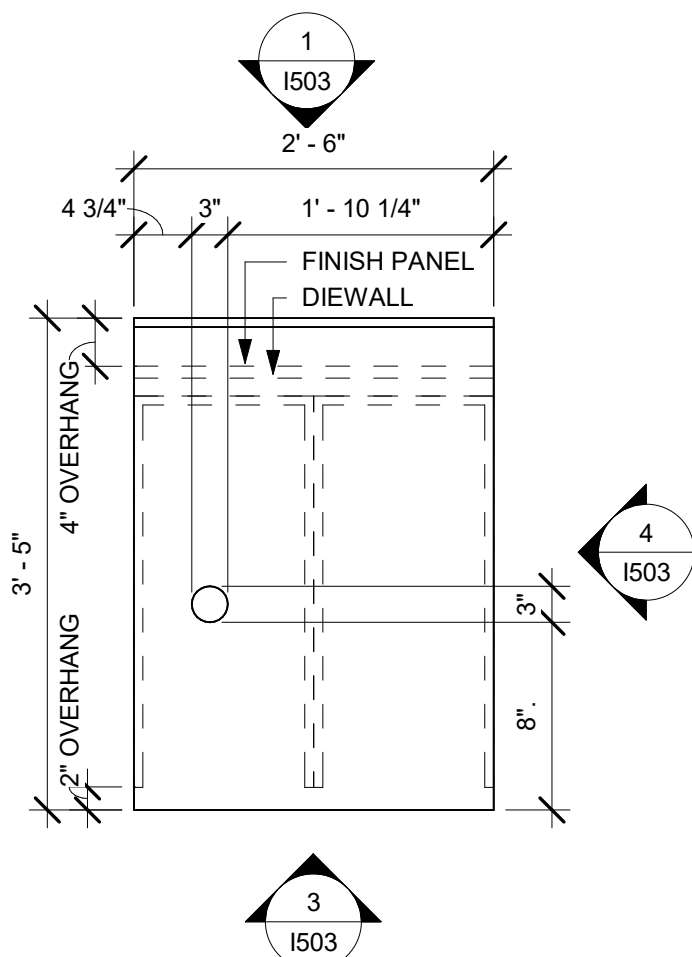


2 MOP - PLAN VIEW
Scale: 3/4" = 1'-0"

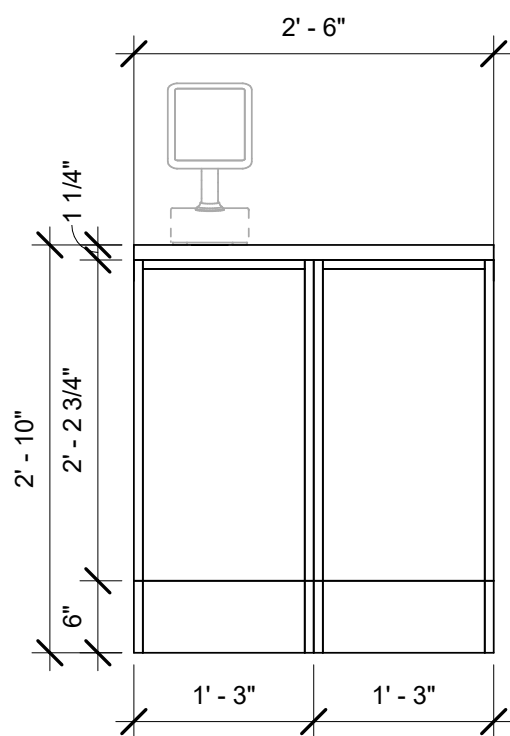

3 MOP - BACK ELEVATION
Scale: 3/4" = 1'-0"

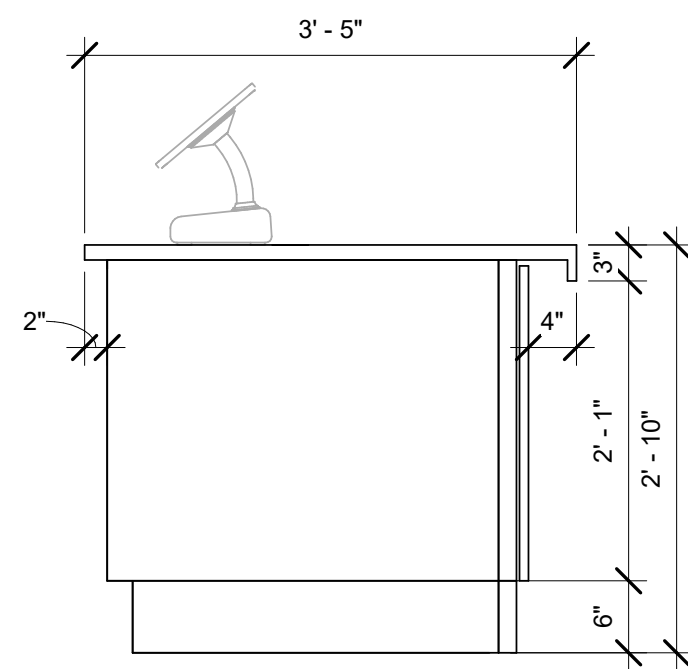

4 MOP - SIDE ELEVATION
Scale: 3/4" = 1'-0"

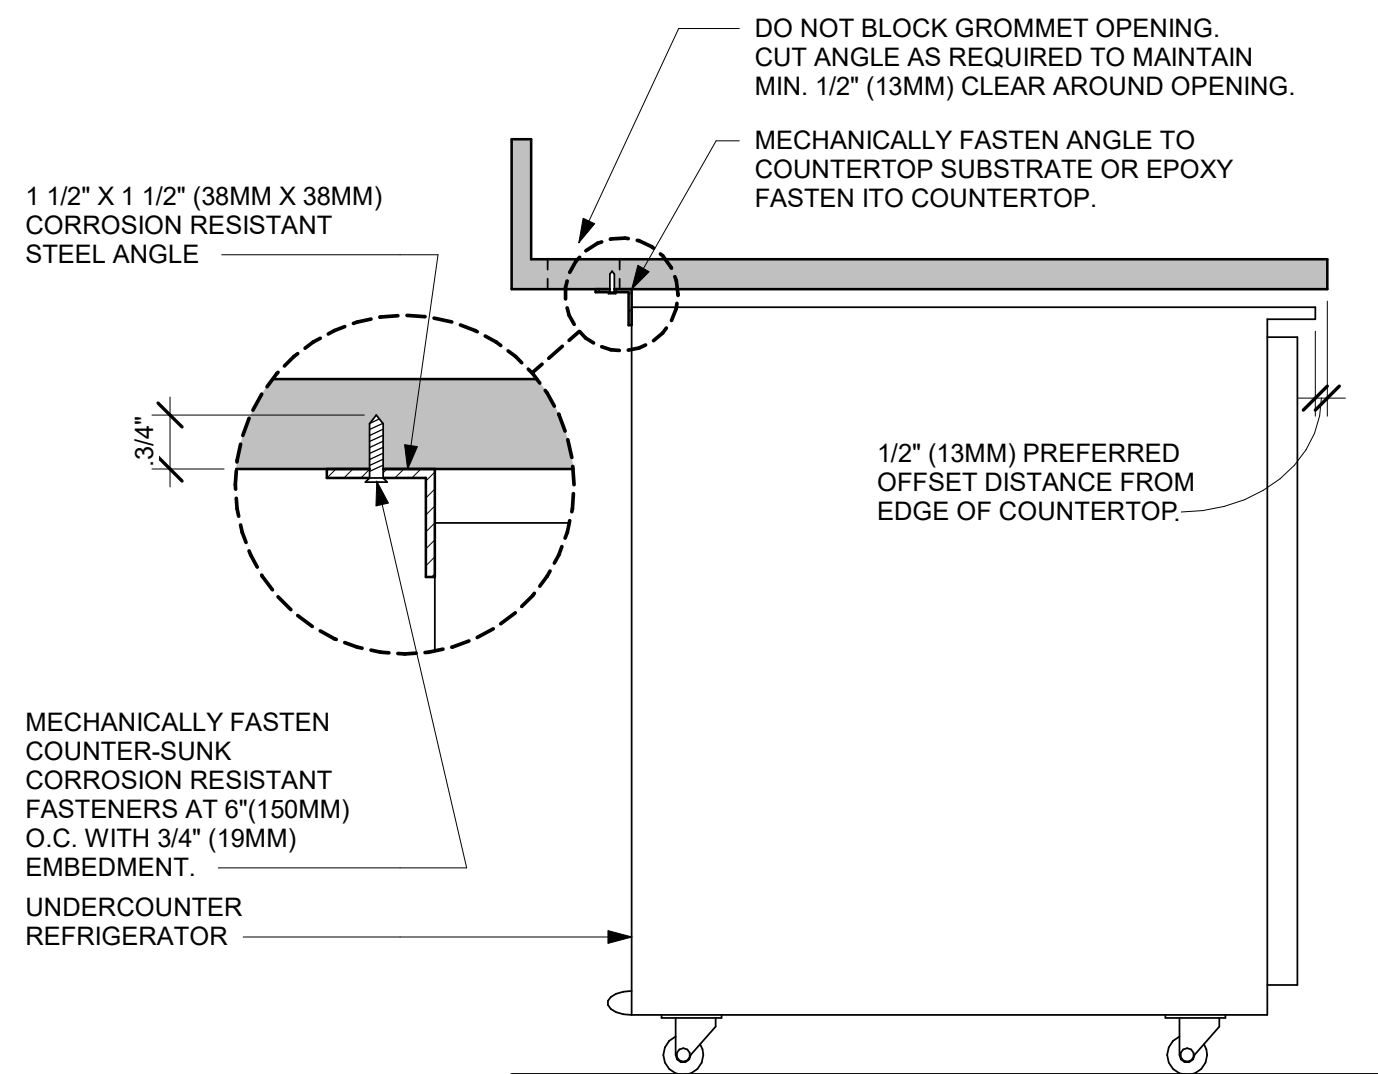


SECTION VIEW

NOTES

- 24" (610MM) 1 1/2" X 1 1/2" (38MM X 38MM) STEEL ANGLE TO BE USED WITH SINGLE DOOR REFRIGERATORS.
- 48" (1220MM) 1 1/2" X 1 1/2" (38MM X 38MM) STEEL ANGLE TO BE USED WITH DOUBLE DOOR REFRIGERATORS.

5 UNDERCOUNTER REFRIGERATOR STOP INSTALLATION
Scale: 1 1/2" = 1'-0"

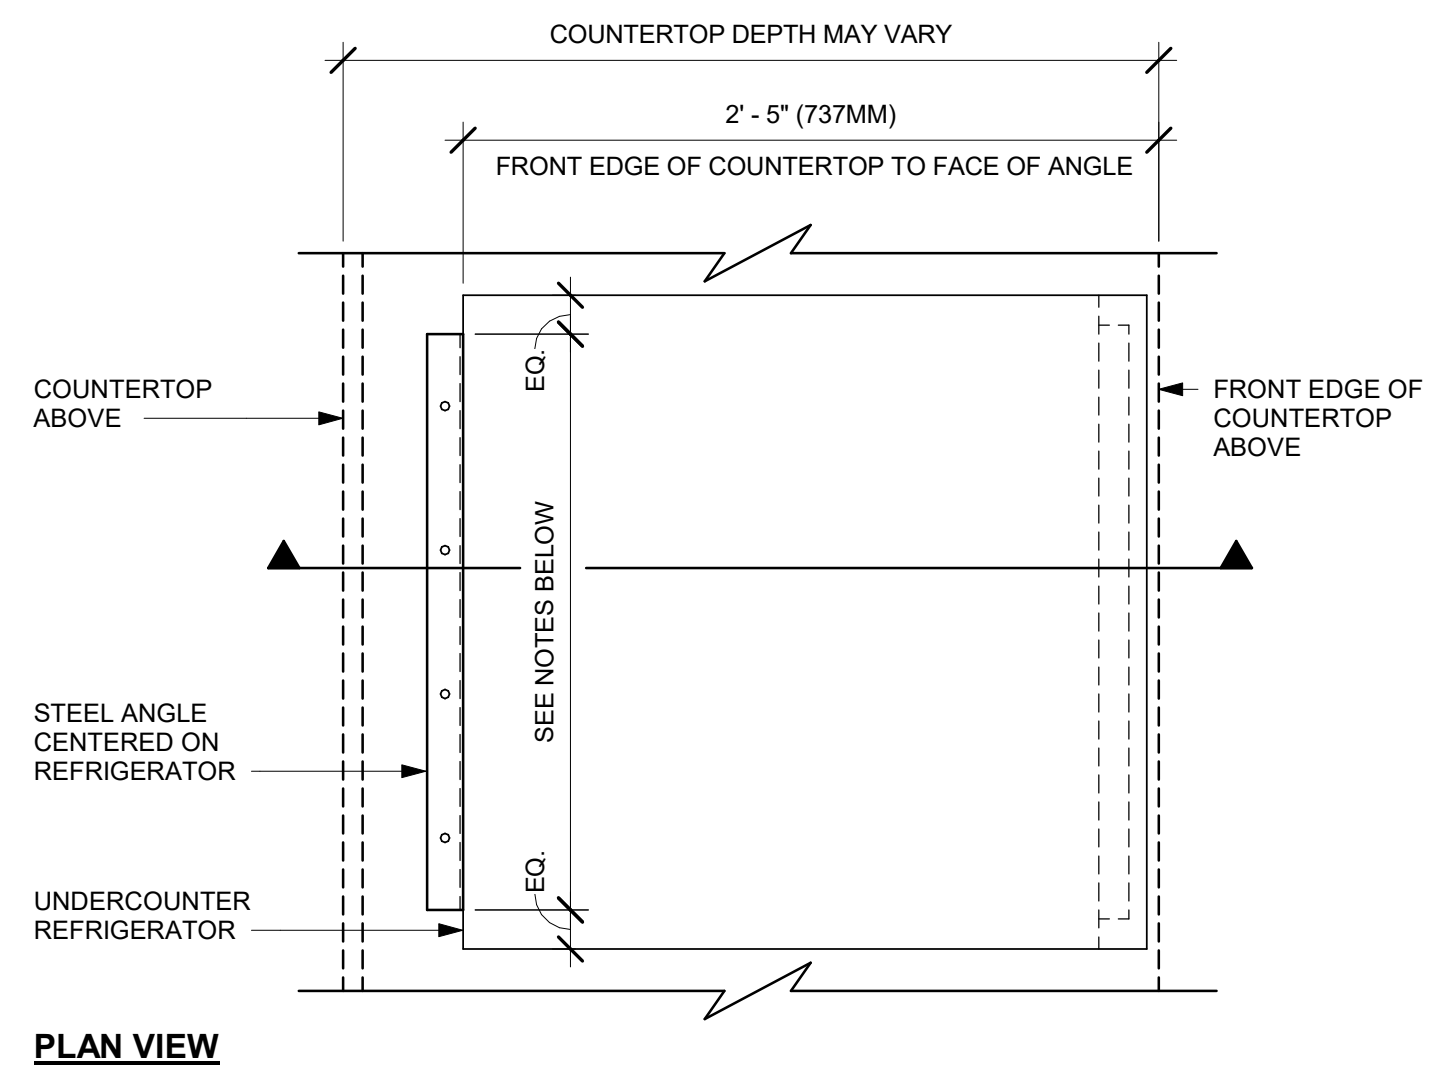

PLAN VIEW

WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303

No. Date Issue By Check

Revisions

No. Date Revision By Check

INTERIOR DETAILS


I503






Architectural floor plan of a room with the following dimensions and features:

- Overall Dimensions:**
 - Top: 10' - 0 1/2"
 - Bottom: 7' - 0 1/2"
 - Left: 3' - 3"
 - Right: 2' - 10"
- Internal Dimensions and Features:**
 - Top Left: 3' - 0"
 - Top Middle: 4' - 4 3/4"
 - Top Right: 1' - 9 1/4"
 - Left Wall: 2' - 2 3/4"
 - Bottom Left: 2' - 3"
 - Bottom Right: 4"
 - Right Wall: 3' - 3"
 - Top Right Wall: 10 1/2" V.I.F.
- Doors and Windows:**
 - Door 5 I504 (Top Left)
 - Door 5 I501 (Top Middle)
 - Door 6 I502 (Top Right)
 - Door 6 I501 (Bottom Center)
 - Window (Left Wall)
 - Window (Bottom Left)
 - Window (Bottom Center)
 - Window (Bottom Right)
- Other Features:**
 - Shaded area (Top Left)
 - Shaded area (Top Middle)
 - Shaded area (Top Right)
 - Shaded area (Bottom Left)
 - Shaded area (Bottom Center)
 - Shaded area (Bottom Right)

Scale: $3/4" = 1'-0"$

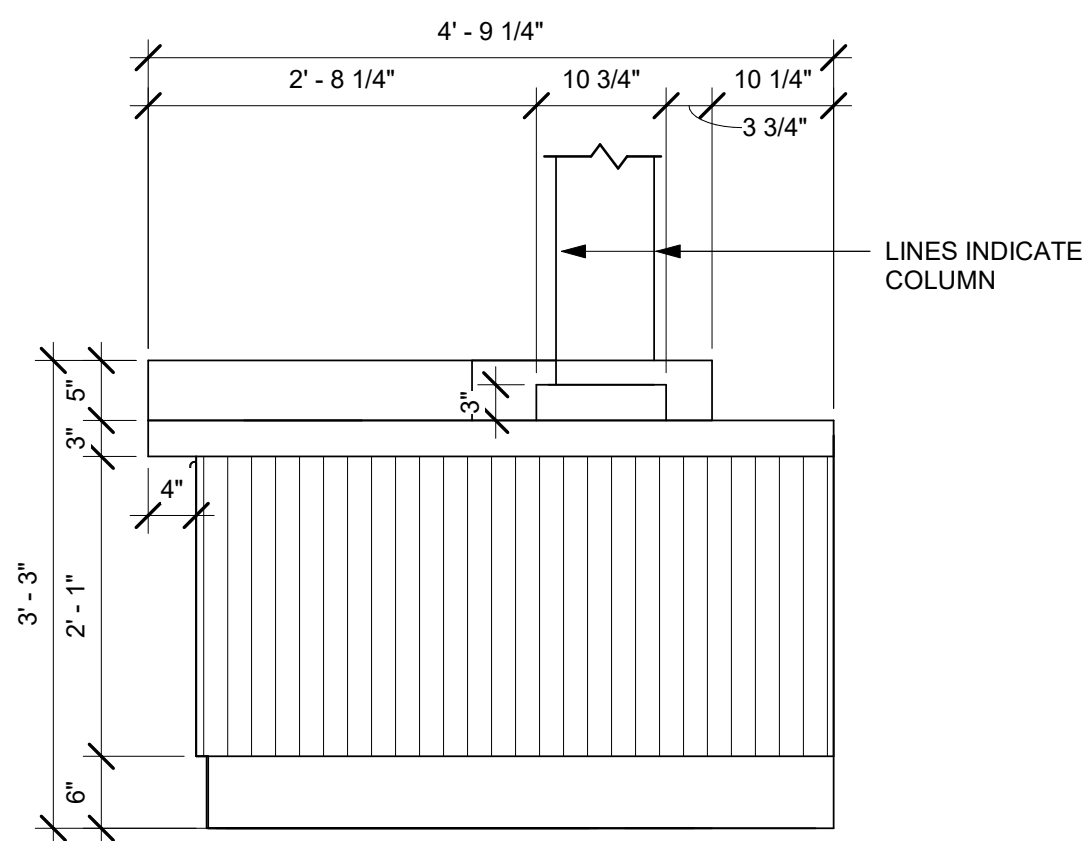


Scale: $\frac{3}{4}'' = 1'-0''$

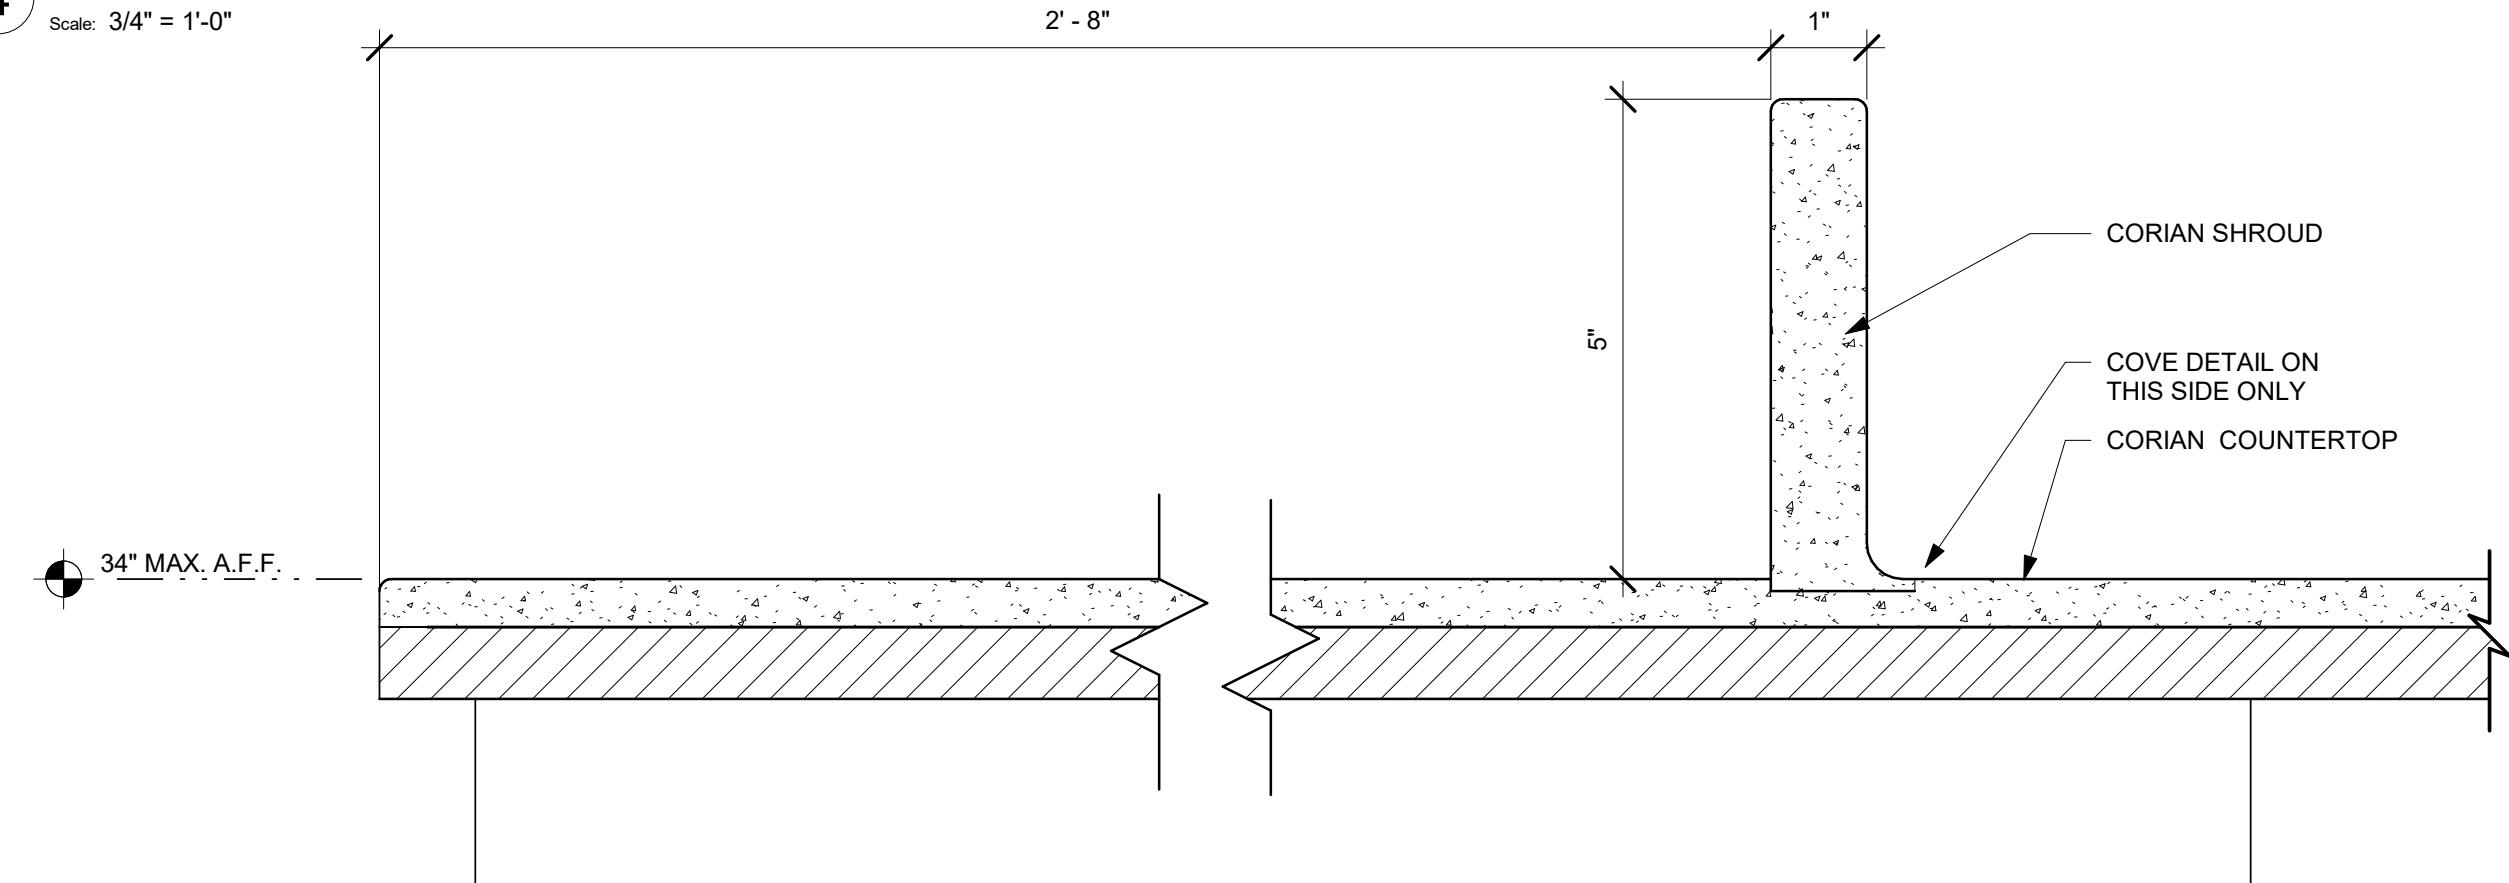[illegible]


No.	Date	Issue	By	Check
-----	------	-------	----	-------

Revisions


ARCHITECT AND/OR ENGINEER OF RECORD
TO VERIFY, SPECIFY AND PLACE ALL
ELECTRICAL AND PLUMBING COMPONENTS.

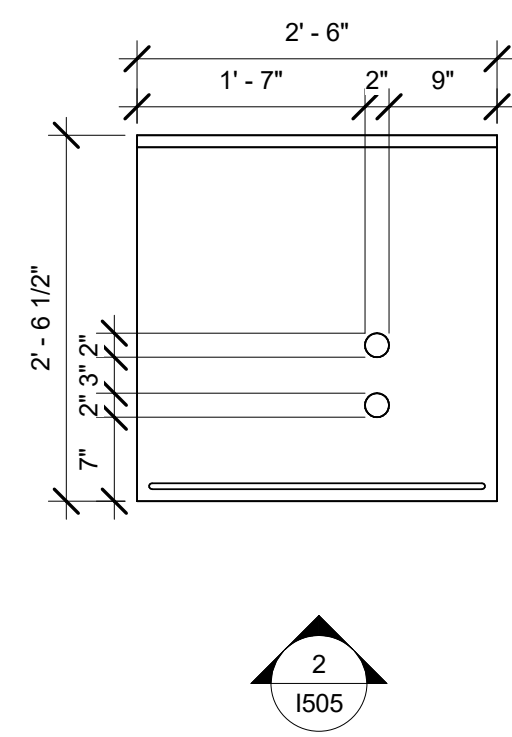


1 NIT - PLAN VIEW
Scale: 3/4" = 1'-0"

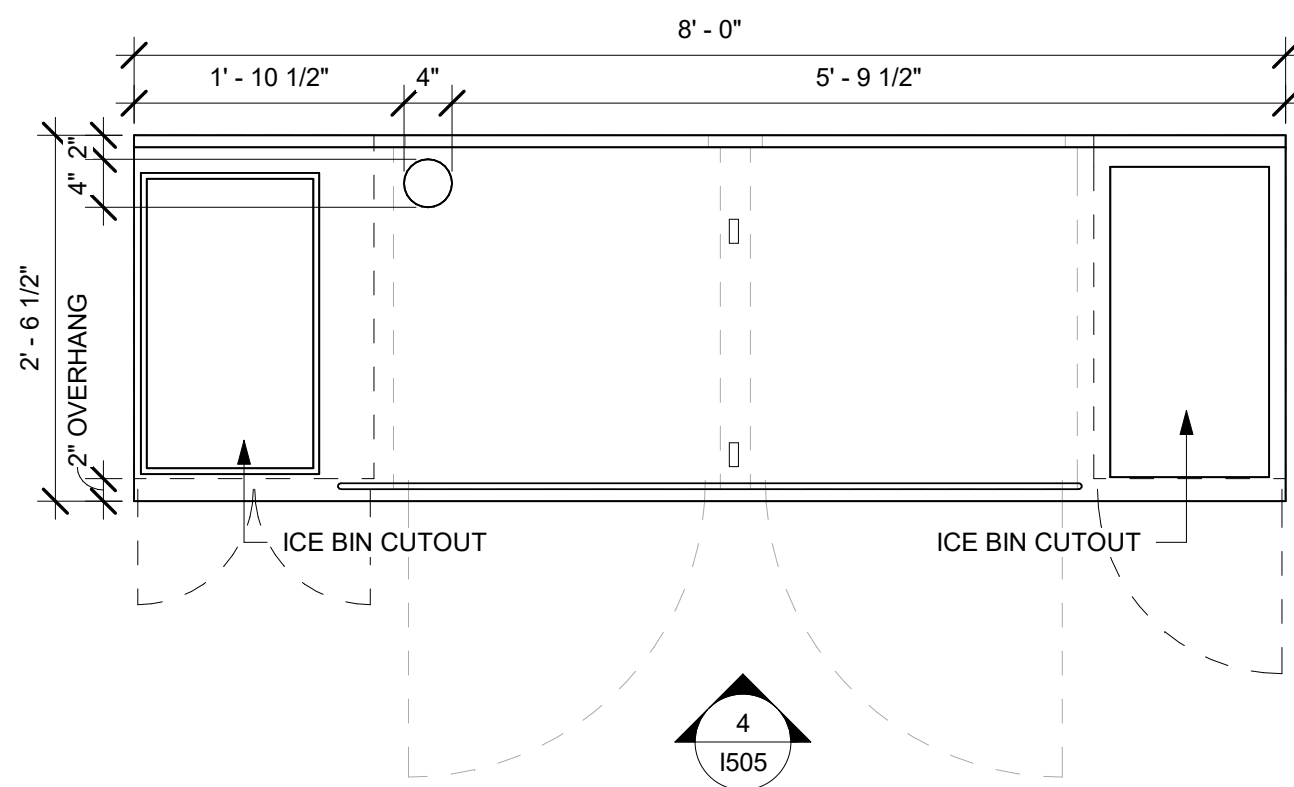


3 CBE - PLAN VIEW
Scale: 3/4" = 1'-0"

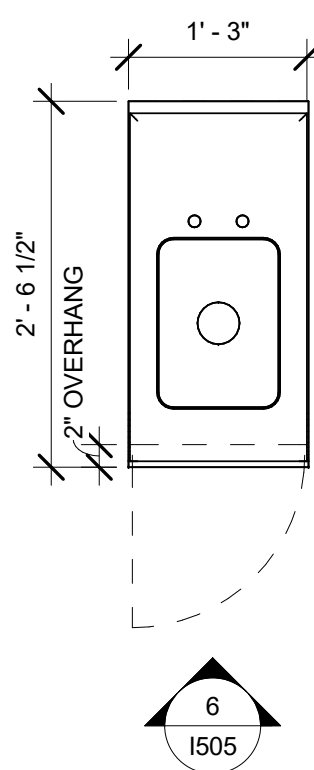


5 HAND SINK - PLAN VIEW
Scale: 3/4" = 1'-0"

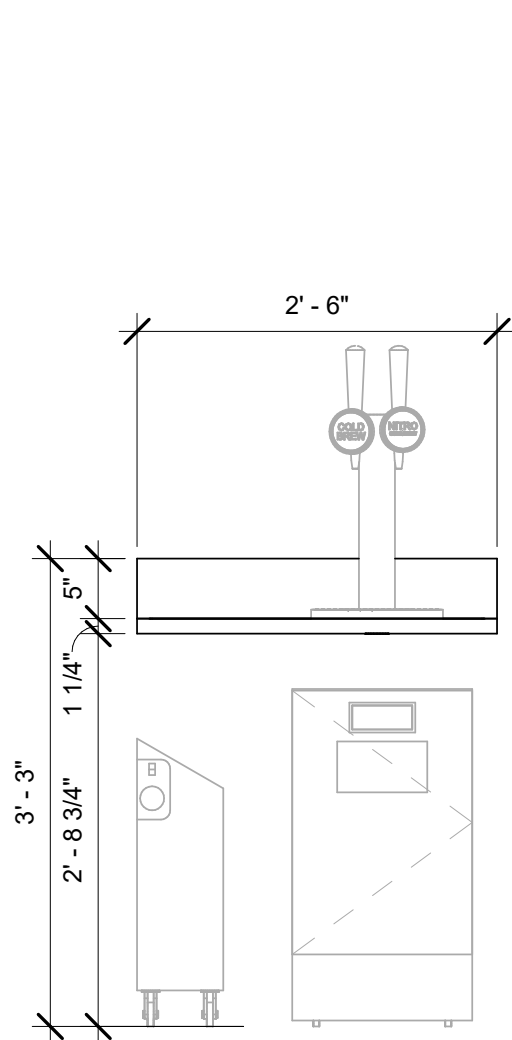


2 NIT - ELEVATION
Scale: 3/4" = 1'-0"

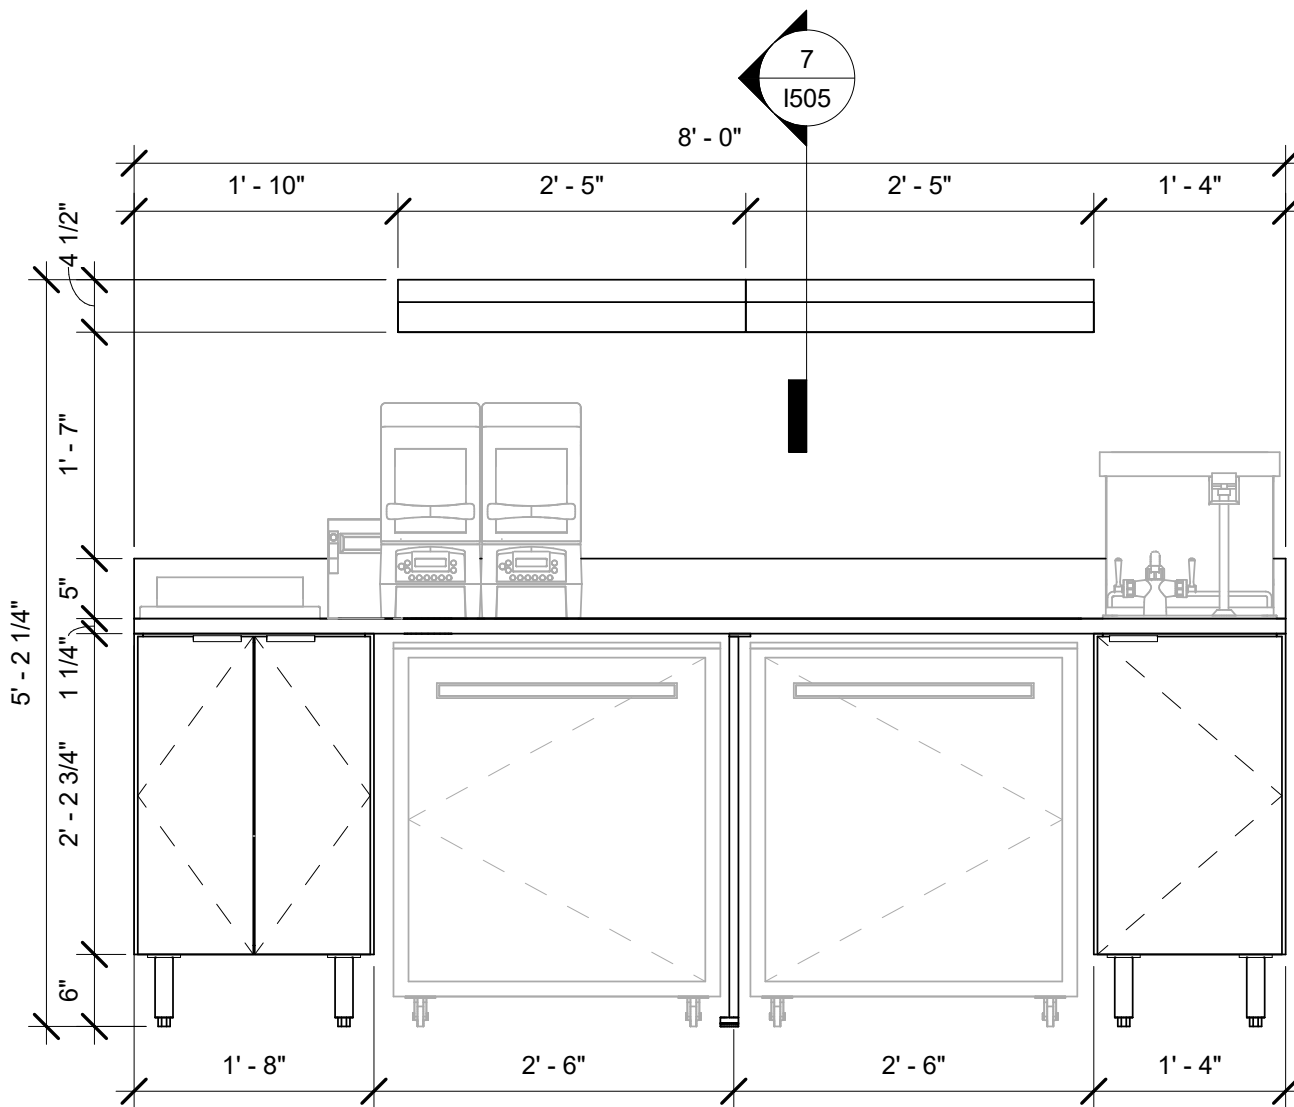

4 CBE - ELEVATION
Scale: 3/4" = 1'-0"

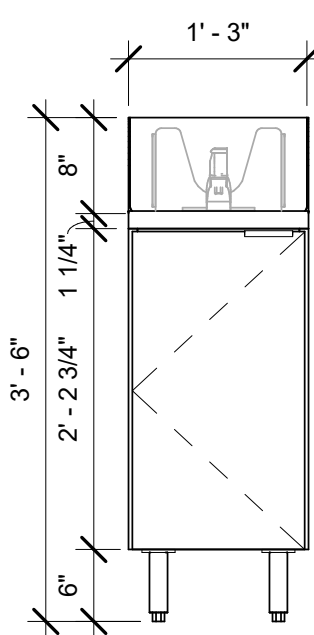

6 HAND SINK - ELEVATION
Scale: 3/4" = 1'-0"

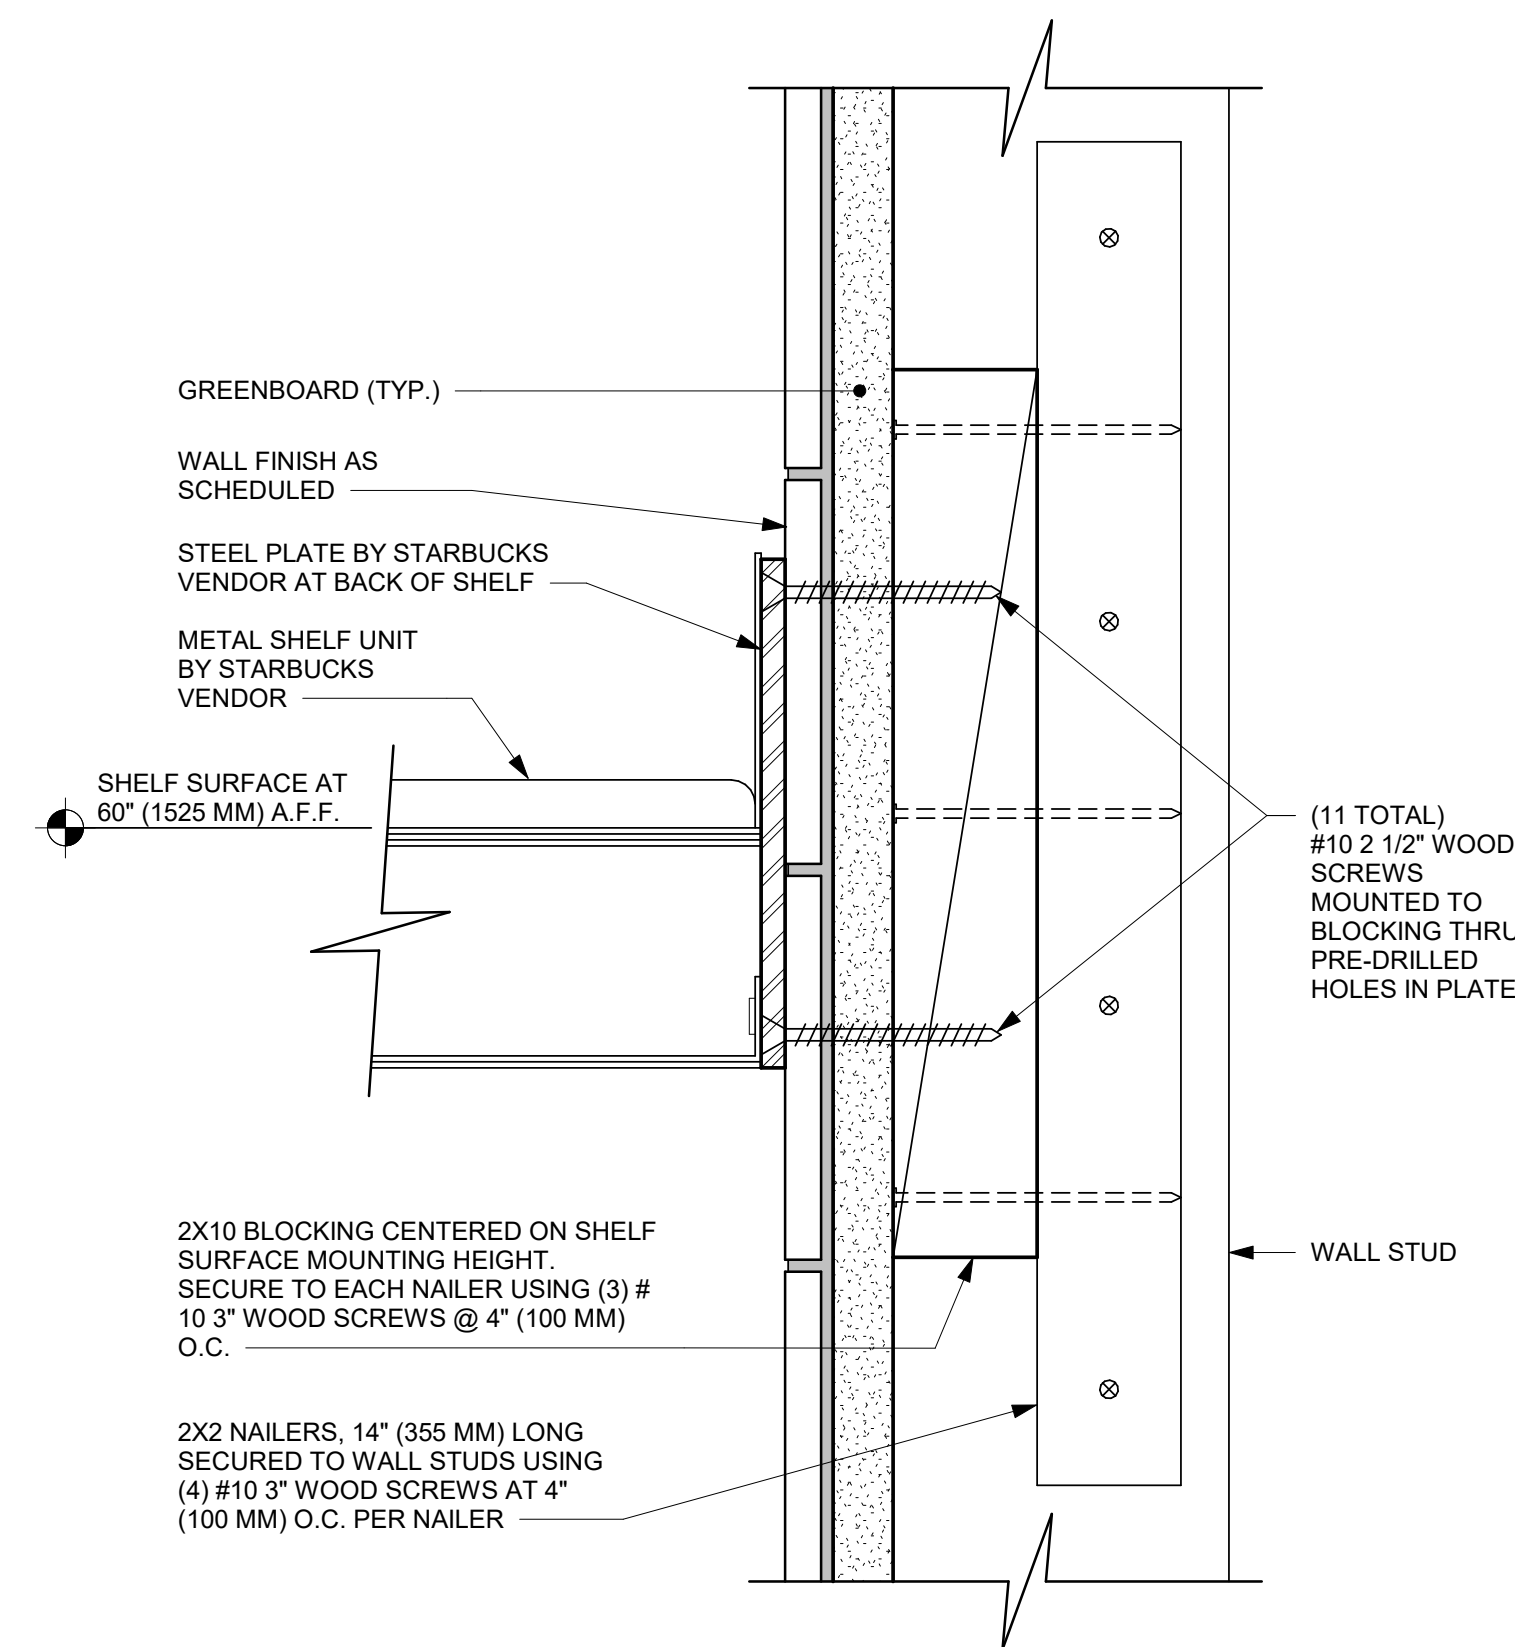

7 METAL TEA SHELF WOOD WALL ATTACHMENT
Scale: 6" = 1'-0"

WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303


No.	Date	Issue	By	Check

Revisions				
No.	Date	Revision	By	Check


INTERIOR DETAILS

1505




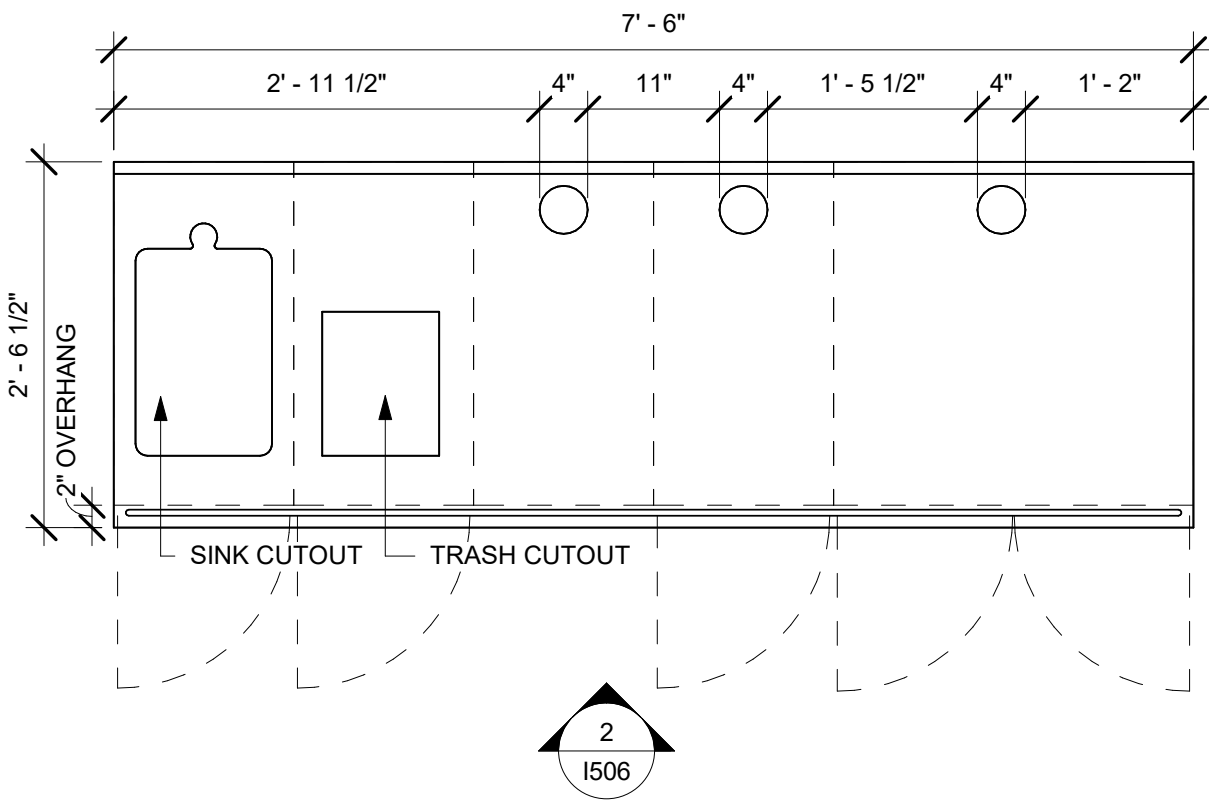


1 BRW - PLAN VIEW
Scale: 3/4" = 1'-0"

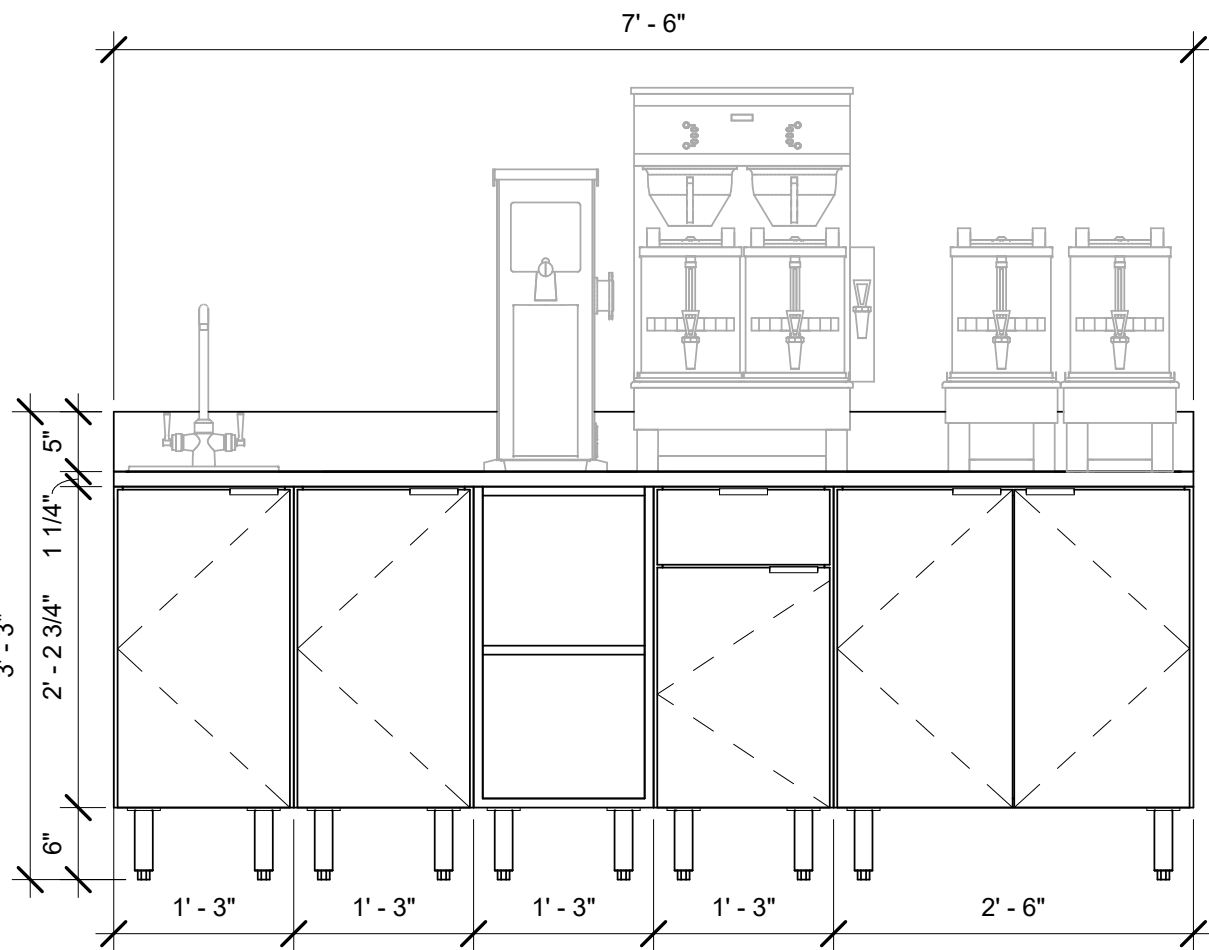


2 BRW - ELEVATION
Scale: 3/4" = 1'-0"

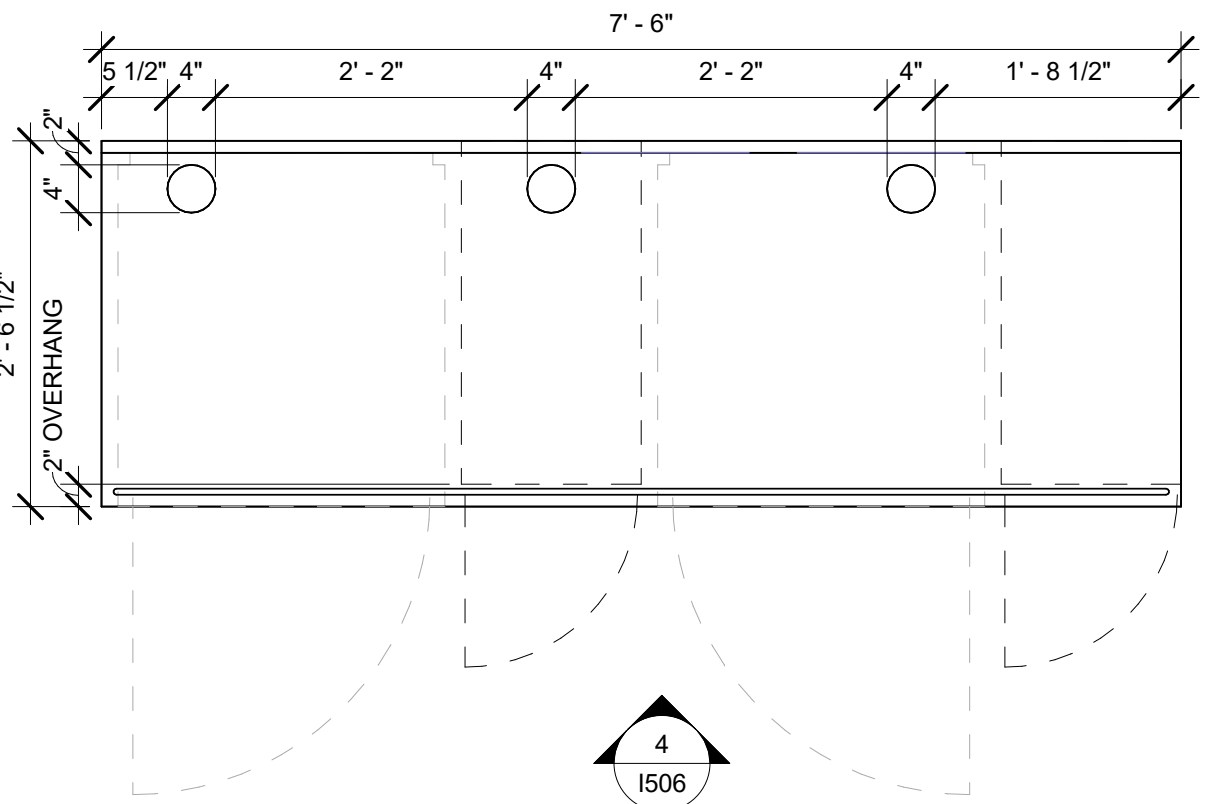


3 WRM - PLAN VIEW
Scale: 3/4" = 1'-0"

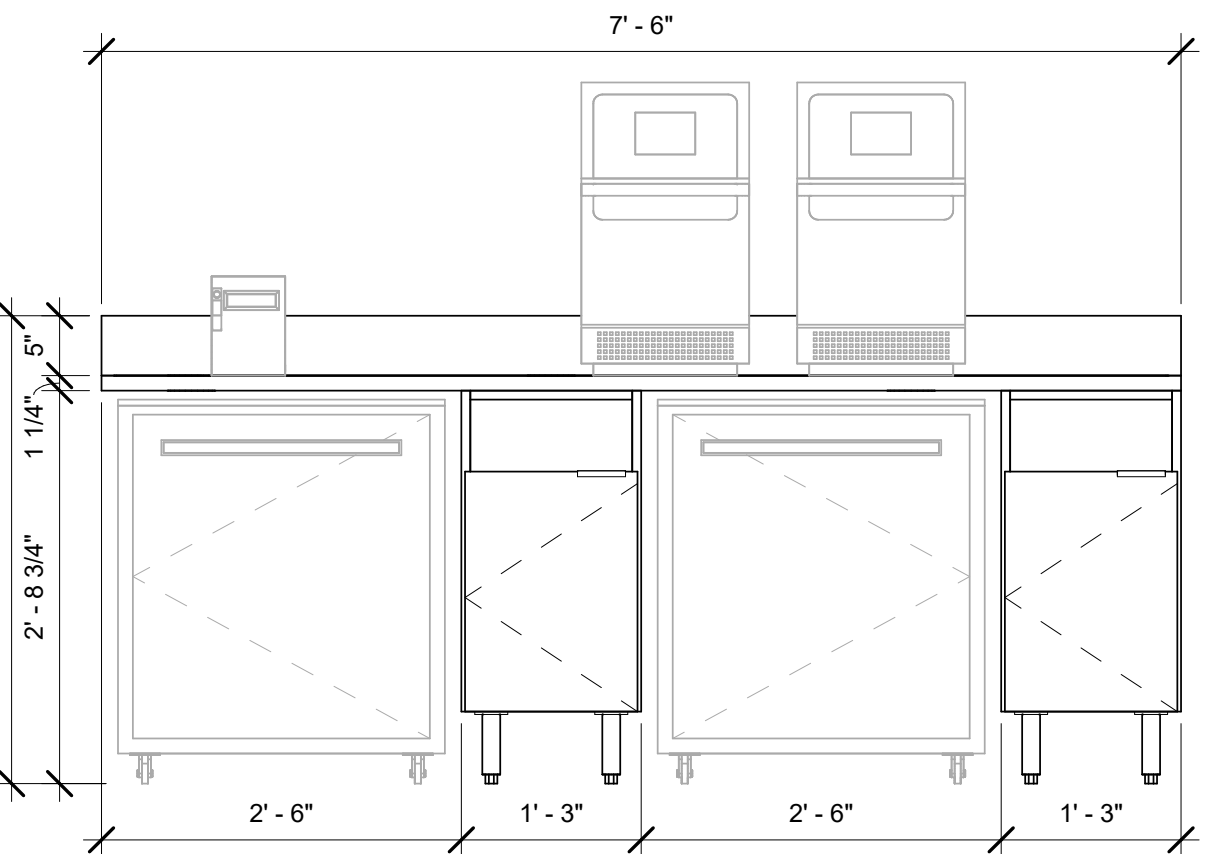


4 WRM - ELEVATION
Scale: 3/4" = 1'-0"

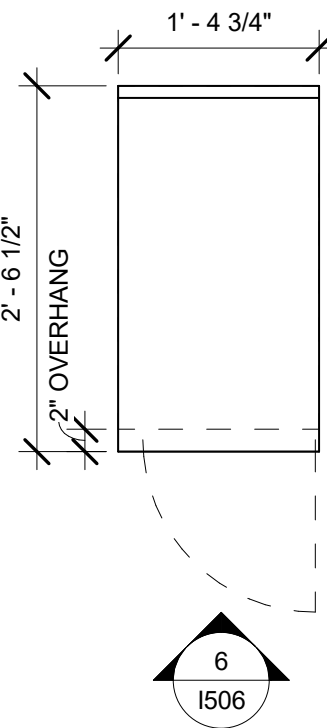

5 BACKBAR STORAGE - PLAN VIEW
Scale: 3/4" = 1'-0"

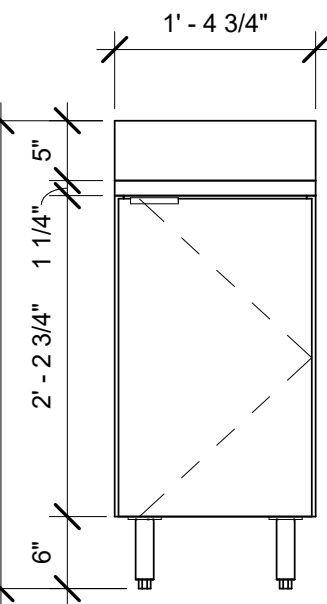

6 BACKBAR STORAGE - ELEVATION
Scale: 3/4" = 1'-0"

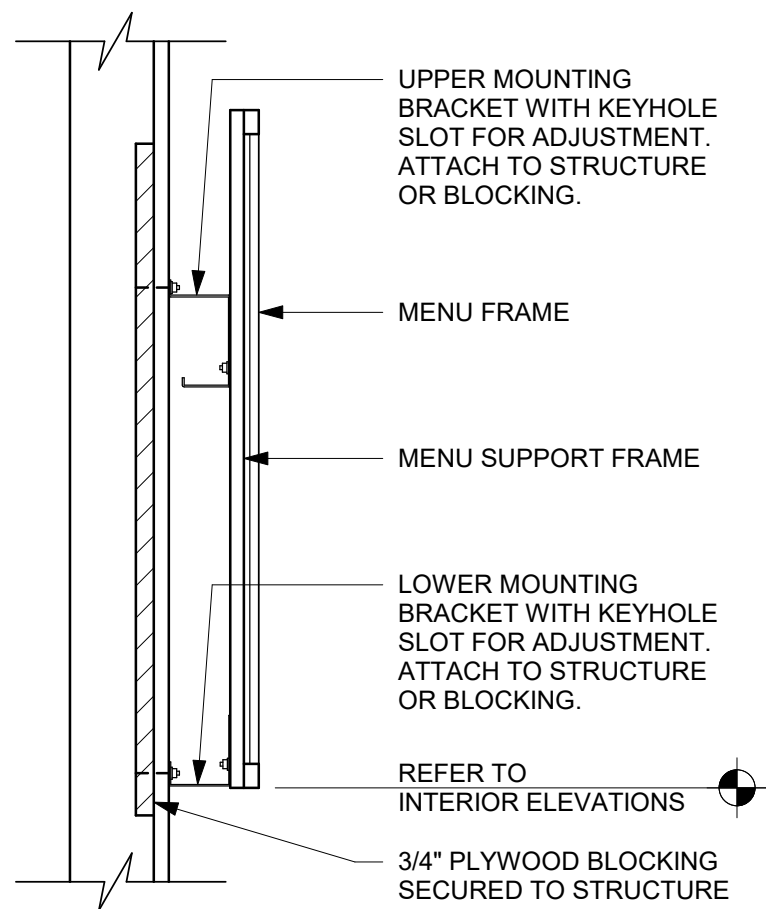

7 MENU - WALL MOUNT
Scale: 1 1/2" = 1'-0"

ARCHITECT AND/OR ENGINEER OF RECORD
TO VERIFY, SPECIFY AND PLACE ALL
ELECTRICAL AND PLUMBING COMPONENTS.

WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303

No.	Date	Issue	By	Check

Revisions


No.	Date	Revision	By	Check

INTERIOR DETAILS


I506




ARCHITECT AND/OR ENGINEER OF RECORD
TO VERIFY, SPECIFY AND PLACE ALL
ELECTRICAL AND PLUMBING COMPONENTS.

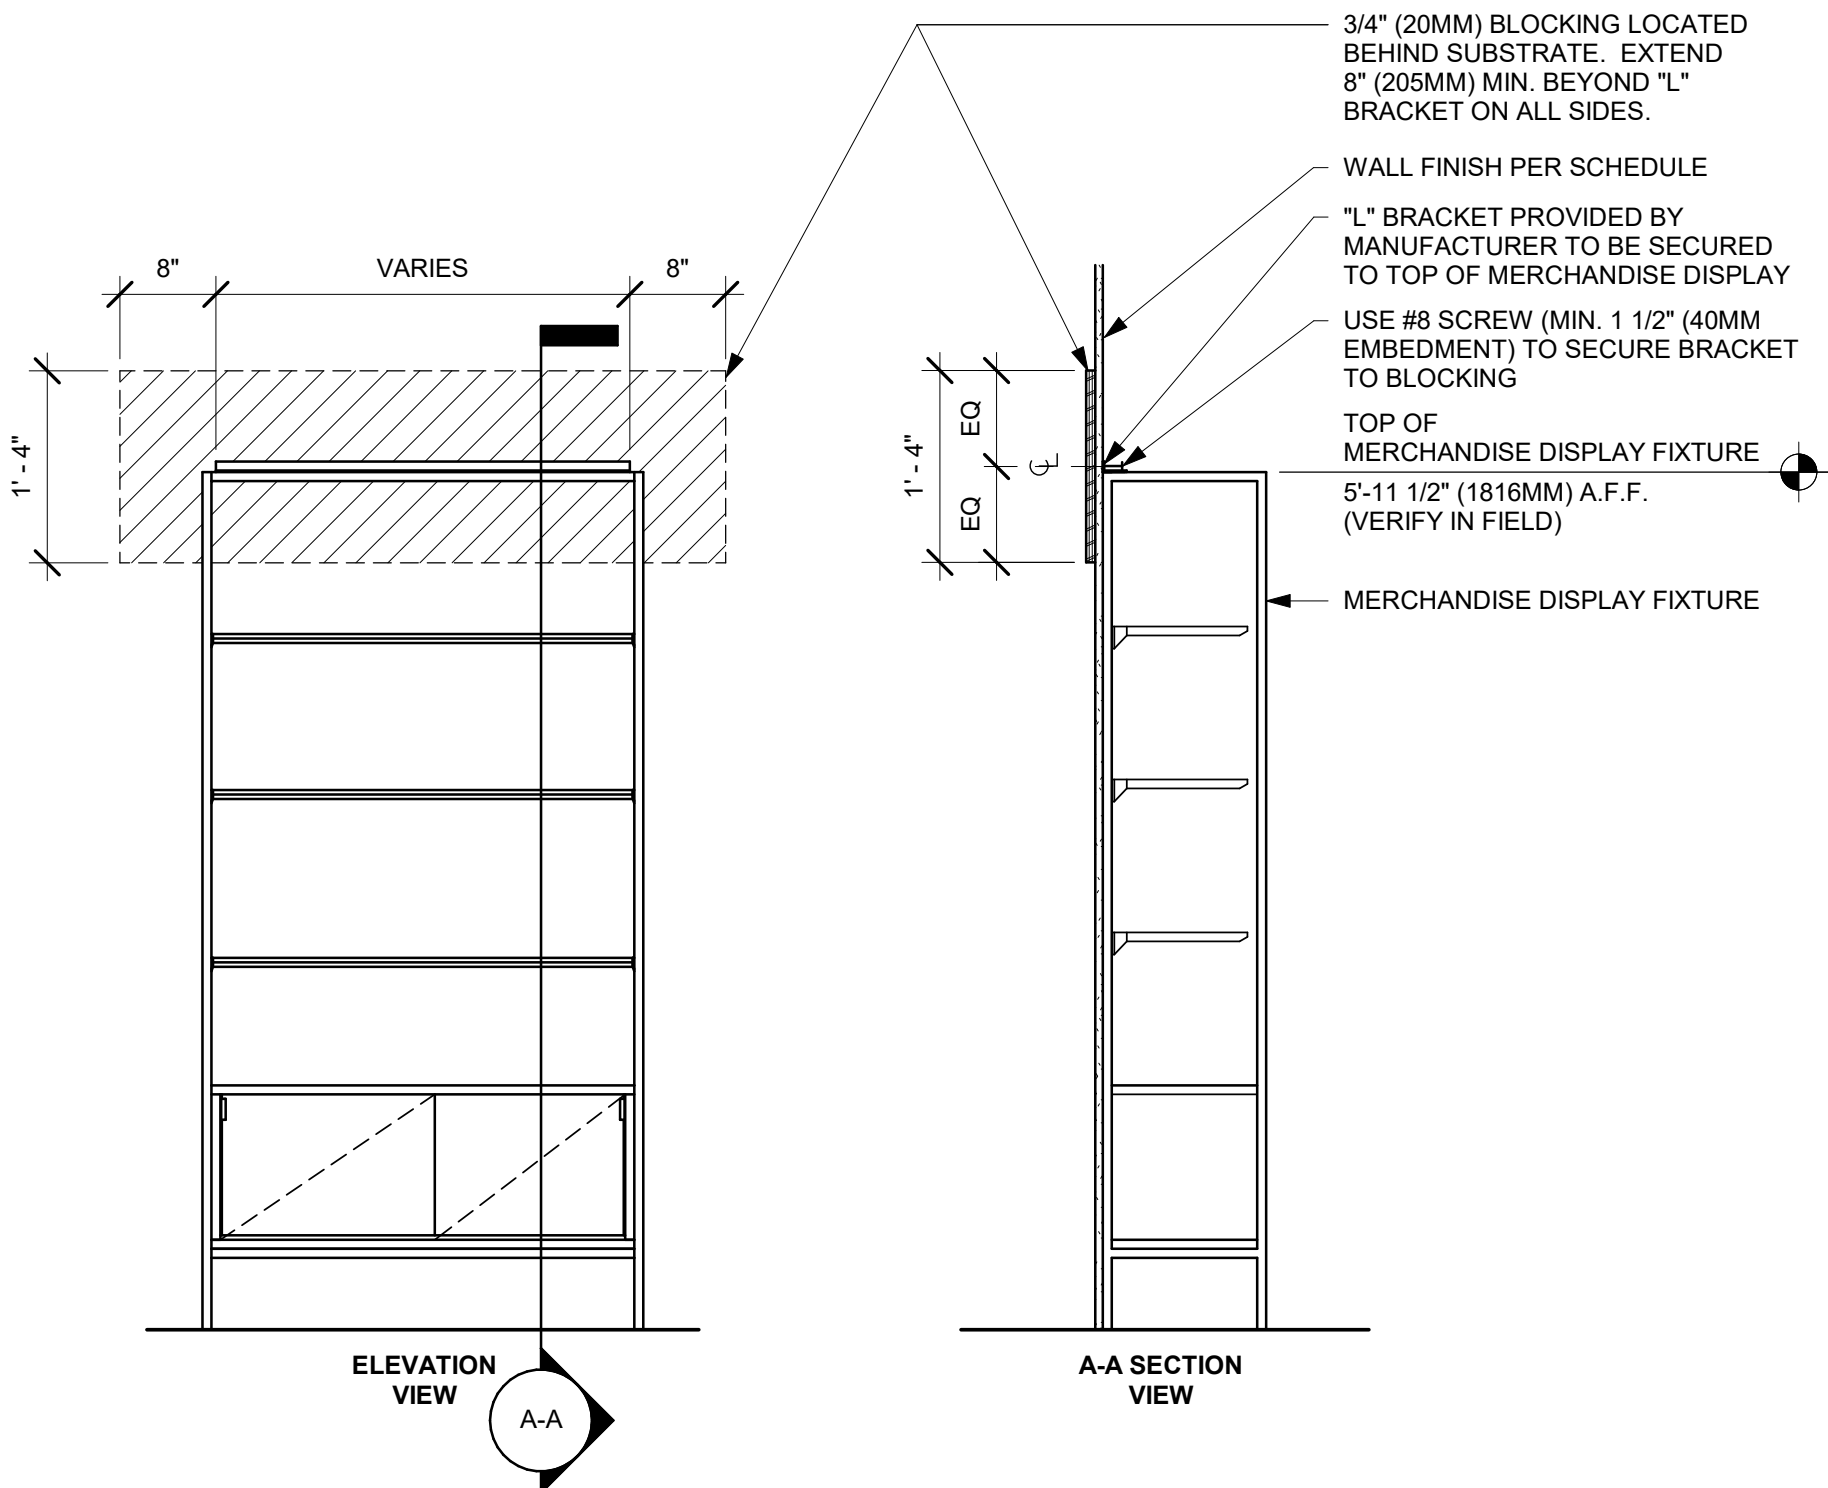


1 MERCHANDISE WALL BAY DISPLAY FIXTURE WALL ATTACHMENT
Scale: 3/4" = 1'-0"

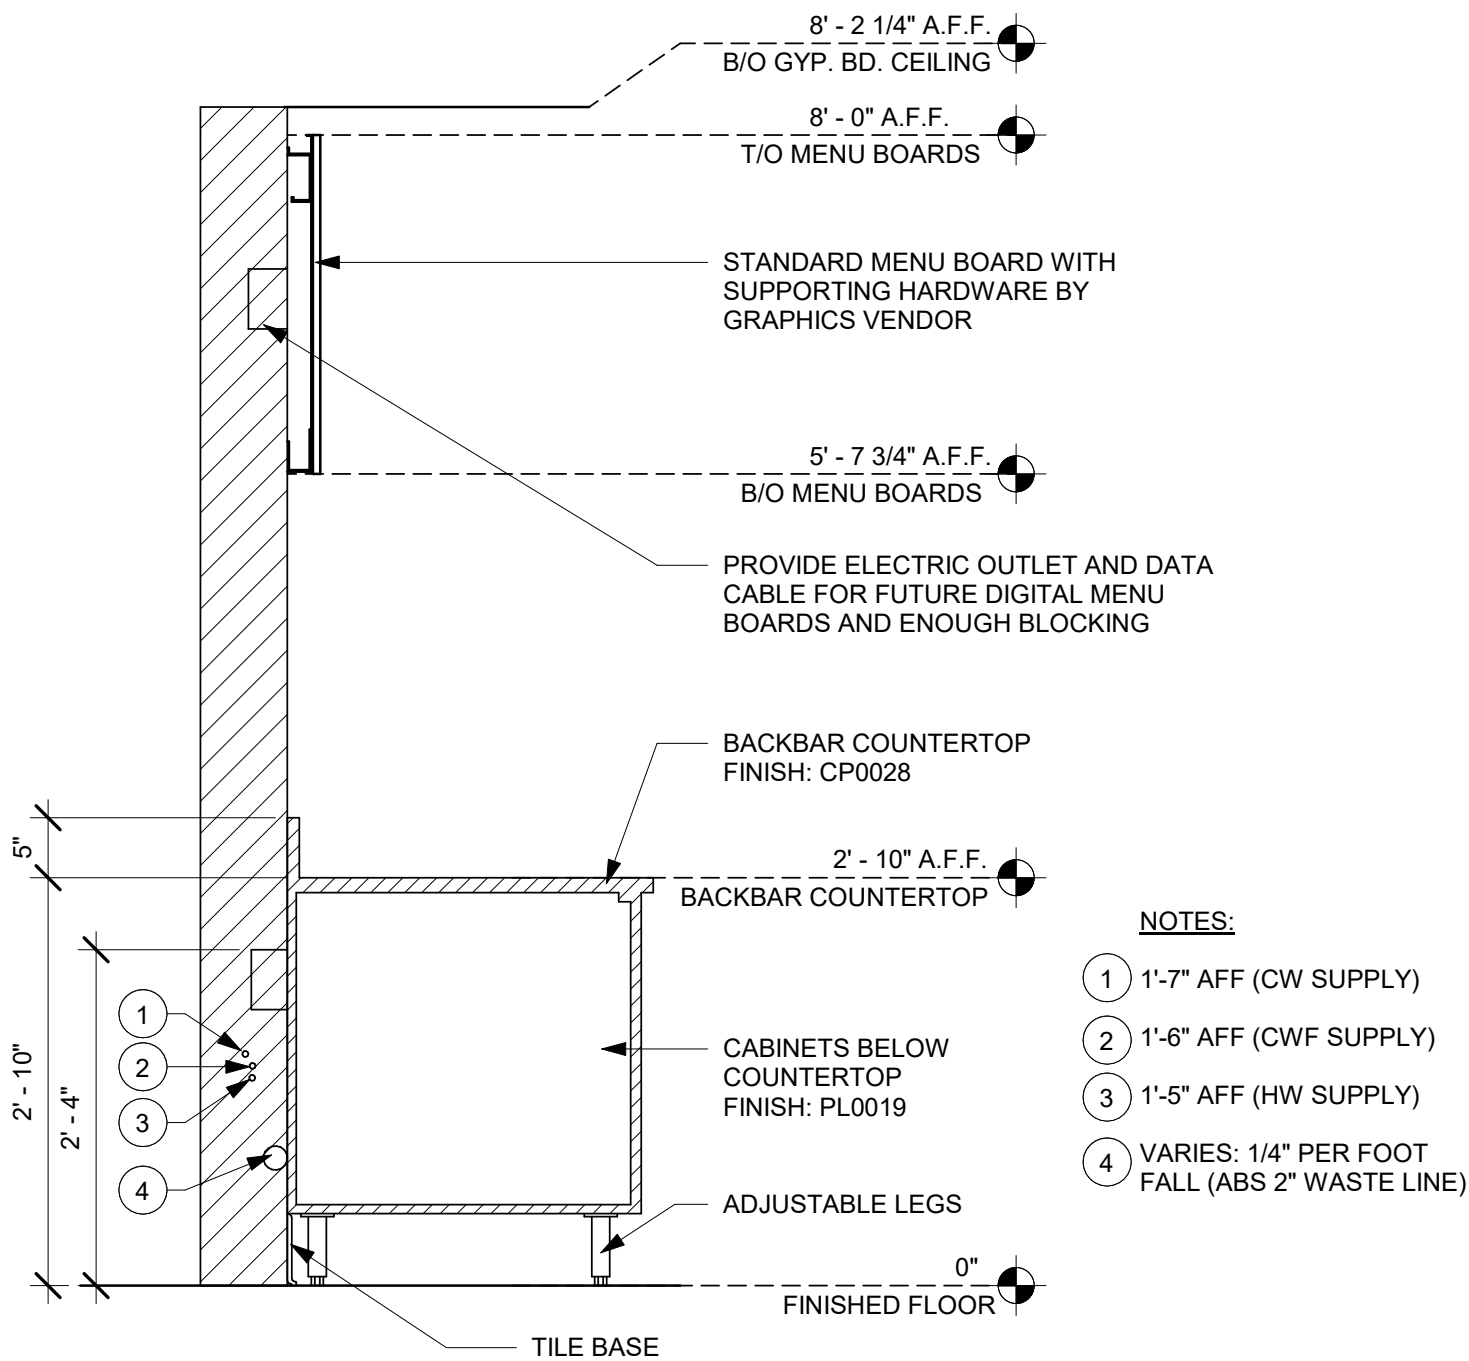

2 SECTION AT BACKBAR WITH MENUS
Scale: 3/4" = 1'-0"

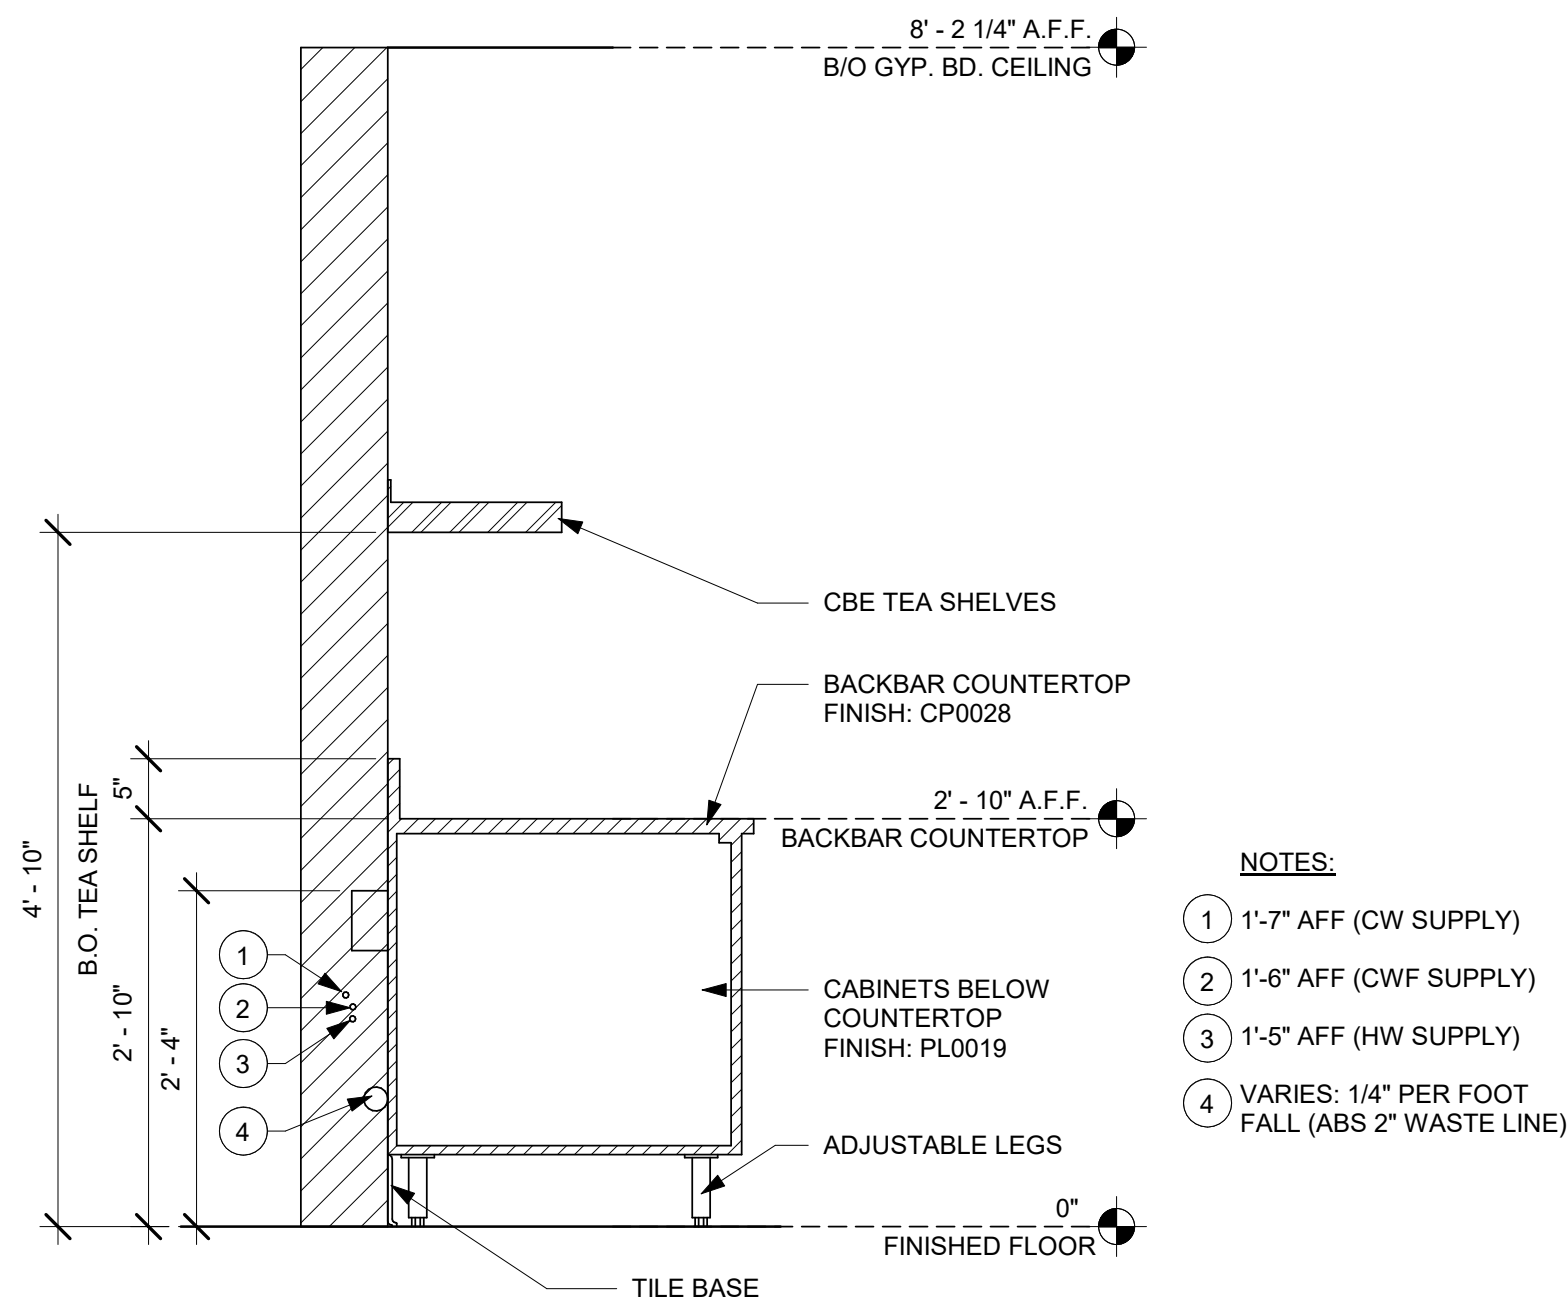

3 SECTION AT BACKBAR WITHOUT MENUS
Scale: 3/4" = 1'-0"

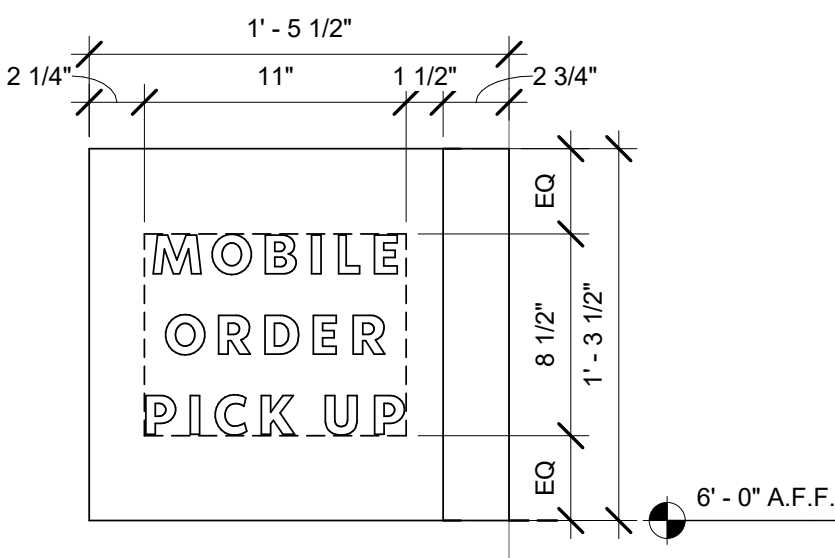

4 MOP SIGN - CUSTOM
Scale: 1 1/2" = 1'-0"

WESTIN PEACHTREE PLAZA LOBBY
210 PEACHTREE ST. NW
ATLANTA, GA 30303

No.	Date	Issue	By	Check
-----	------	-------	----	-------

Revisions

No.	Date	Revision	By	Check
-----	------	----------	----	-------

INTERIOR DETAILS

1507

