



ALUMA-FORM®


Line Post Insulators





ALUMA-FORM®

Line Post Insulators

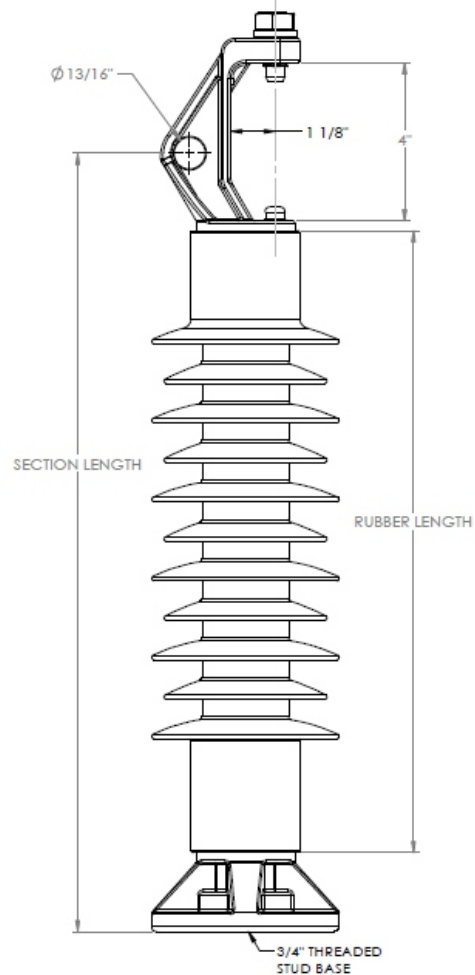


Cat #	Rubber Length	Section Length	Dry Arc	Leakage	Electrical Flashover				Cantilever Load		
					60 Hz		CIFO		SCL	MDCL	
					Dry	Wet	POS	NEG		50%	40%
INS-46-LP-HSX-11	16	20	16.3	36.5	169	149	286	366	2800	1400	1120
INS-69-LP-HSX-17	22	26.5	22.3	54	224	203	381	472	2800	1400	1120



ALUMA-FORM®

Line Post Insulators

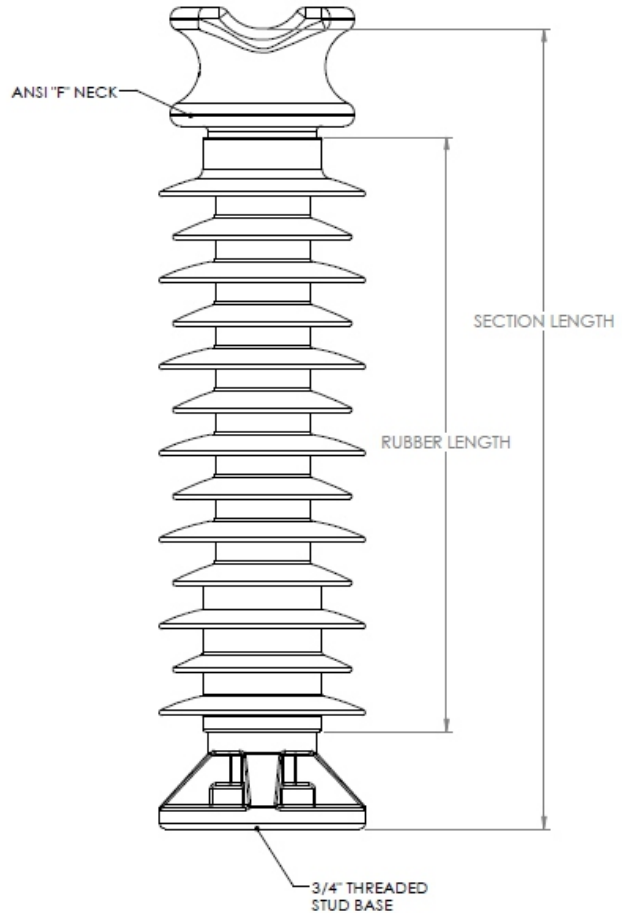


Cat #	Rubber Length	Section Length	Dry Arc	Leakage	Electrical Flashover				Cantilever Load		
					60 Hz		CIFO		SCL	MDCL	
					Dry	Wet	POS	NEG		50%	40%
INS-46-LP-TSX-13	14	18.7	15	36.7	158	138	267	343	2800	1400	1120
INS-46-LP-TSX-13-A	14	18.7	15	36.7	158	138	267	343	2800	1400	1120
INS-69-LP-TSX-17	20	24.7	22.3	54	213	192	361	450	2800	1400	1120



ALUMA-FORM®

Line Post Insulators

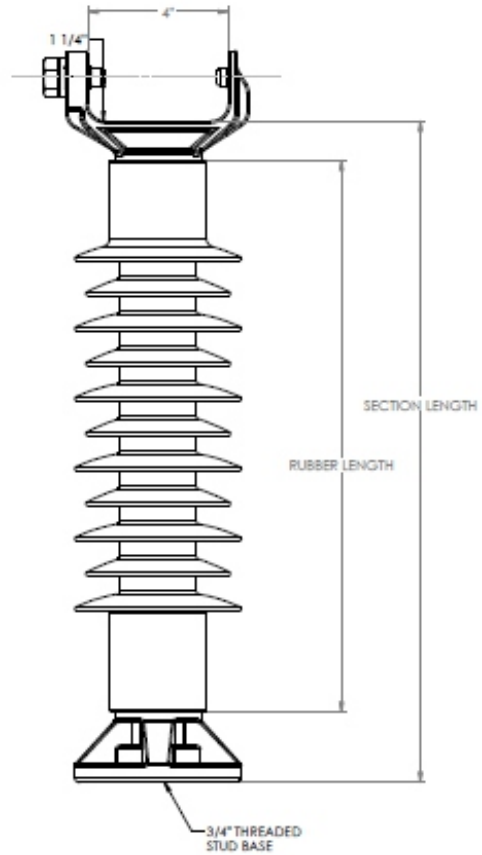

Cat #	Rubber Length	Section Length	Dry Arc	Leakage	Electrical Flashover				Cantilever Load		
					60 Hz		CIFO		SCL	MDCL	
					Dry	Wet	POS	NEG		50%	40%
INS-46-LP-VSX-11	16	20	16.3	36.5	169	149	286	366	2800	1400	1120
INS-69-LP-VSX-17	22	26	22.3	54	224	203	381	472	2800	1400	1120