


## HUBBELL CONTROL VALVES

## CHECK VALVES

TYPES R AND G ARE PISTON TYPE CHECK VALVES. THEY ARE MADE WITH THE SAME CASTINGS AS TYPE S AND FS SOLENOIDS FOR THE SMALLER SIZES AND THE REGULATOR VALVES FOR 5" THRU 8". THEY CAN BE MANUALLY OPERATED BY REMOVING THE SEAL CAP.

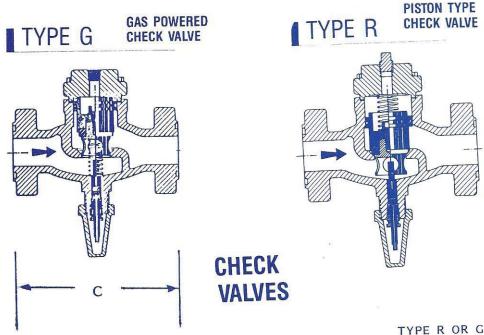

		-	
tv	pe		J

	ty	pe	R
--	----	----	---

Port Size	BASIC CAT NO	Port Size	BASIC CAT NO
9/16	G0502	9/16	R0502
3/4	G0754	3/4	R0754
1	G1004	1	R1004
1-1/4	G1254	1-1/4	R1254
1-1/2	G1504	1-1/2	R1504
2	G2004	2	R2004
2-1/2	G2504	2-1/2	R2504
3	G3004	3	R3004
4	G4004	4	R4004
5	G5008	5	R5008
6	G6008	6	R6008

PORT	TYPE R OR G CHECK VALVES C		
	OLD	NEW	
9/16*,3/4*	3-3/8	3-3/8	
9/16,3/4		6-1/2	
1*	3-3/8		
1	7-5/8	5-3/4	
1 1/4	8 1/2	7	
1 1/2	91/4	7 14	
2	101/4	814	
$2\frac{1}{2}$	101/4	8-7/8	
3	12-3/4	10-1/8	
4	16	11-15/16	
5		194	
6		221/4	
8		21	

<sup>\*2</sup> bolt (oval) flange construction