

## DP15

### Heavy Duty Two Post Lift 15,000 lbs. Capacity

#### Features:

- **NEW** Single point release lock at operations center
- Features symmetrical column design
- Direct-Pull Lifting - high efficiency, low maintenance technology
- Closed loop hydraulic sytem protects against hydraulic contamination
- Powder coat paint is more durable than conventional coatings
- Padded shut-off bar
- Low profile arms and adjustable truck adapters
- Third party by certified by ALI



Model shown:  
FWD DP15N002BL


Specifications	Lower Ceiling DP15N000BL DP15N000RD	DP15N001BL DP15N001RD	DP15N002BL DP15N002RD
Capacity	15,000 lbs. (6803kg)	15,000 lbs. (6803kg)	15,000 lbs. (6803kg)
Rise*	83" (2120mm)	83" (2120mm)	83" (2120mm)
Overall Height	154-3/4" (3930mm)	175" (4445mm)	199" (5054mm)
Height to Shut-Off	147-1/4" (3735mm)	167-1/4" (4250mm)	191-1/4" (4860mm)
Minimum Ceiling Height	155-3/4" (3956Smm)	176" (4470mm)	200" (5080mm)
Overall Floor Width	154-3/8" (3921mm)	154-3/8" (3921mm)	154-3/8" (3921mm)
Inside Column Width	119-5/8" (3038mm)	119-5/8" (3038mm)	119-5/8" (3038mm)
Drive Through	108-1/4" (2750mm)	108-1/4" (2750mm)	108-1/4" (2750mm)
Arm Reach	38" (965mm) 61" (1549mm)	38" (965mm) 61" (1549mm)	38" (965mm) 61" (1549mm)
Minimum Adapter Height	5-1/2" (139mm)	5-1/2" (139mm)	5-1/2" (139mm)
Stackable Adapter Height (low extension)	10-1/2" (266mm)	10-1/2" (266mm)	10-1/2" (266mm)
Stackable Adapter Height (high extension)	15-1/2" (393mm)	15-1/2" (393mm)	15-1/2" (393mm)
Voltage/Amps	208/230v, 20 amps	208/230v, 20 amps	208/230v, 20 amps
Motor/Phase	2 HP/1Ø	2 HP/1Ø	2 HP/1Ø

Specifications subject to change without notice or liability.  
BL = blue RD = red

\*Maximum lifting height with 10" adapters



### Truck Adapter Extensions:

The DP15 includes four 5" and four 10" truck adapter extensions allowing you to lift a range of vehicles on the road today



10" Adapter

5" Adapter

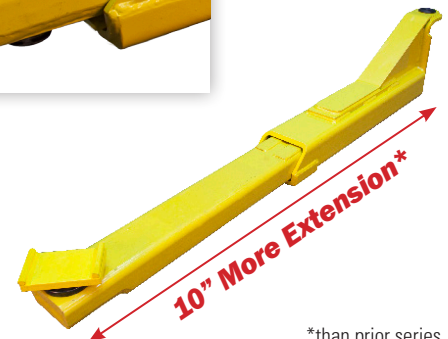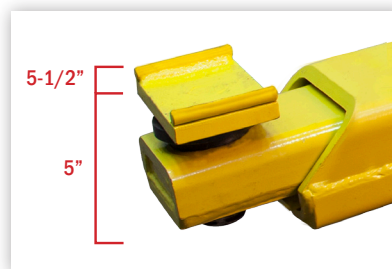

\*than prior series