


Pin Puller Safety Features

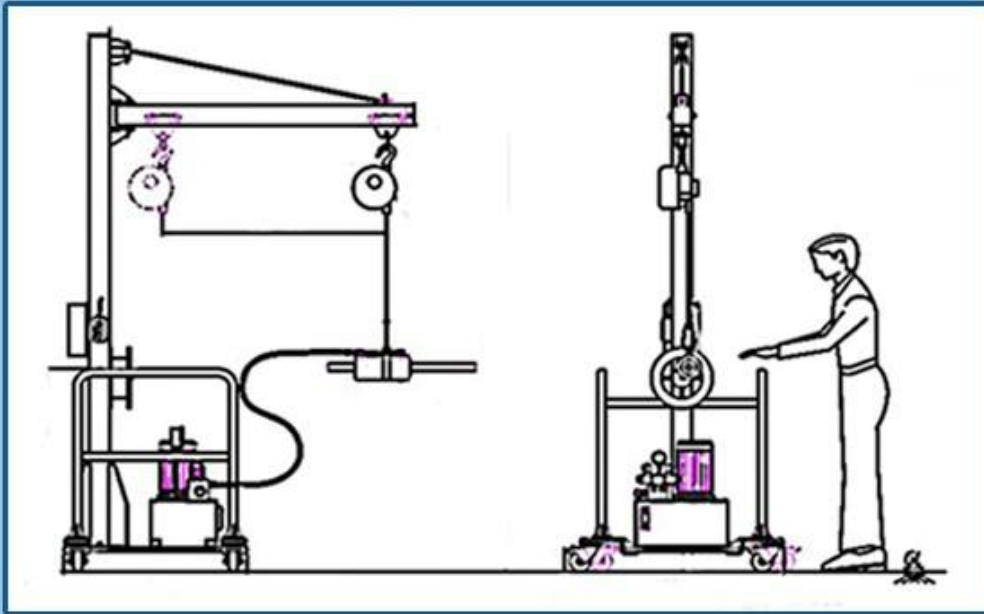

- Light weight aluminium alloy for easy handling
- The spring balancer fitted on the trolley allows for simple hands free operation
- Save time and energy
- Adopted by both repair shops and OEM's
- Suitable for onsite repairs
- Suits most construction machines and brands

HEMS Ltd

Suit 6, St Georges House, 34-36 St Georges Road, Brighton, BN2 1ED, UK
Tel: 44 1273 686870 Fax: 44 20 7504 3787 or 44 1273 675740
E-mail: sales@hemsltd.com Web: www.hemsltd.com



HEMS limited



HEMS New Pin Puller



Trolley Mounted Hydraulic Pin Removal/Bush Fitting equipment

HE PP 30/50

SAFE Removal and Fitting of Pins and Bushings

 **ESVATE[®]**
CORPORATION
Perú: ventas@esvate.com / +51 959370697
www.esvate.com

HEMS Ltd

Suit 6, St Georges House, 34-36 St Georges Road, Brighton, BN2 1ED, UK
Tel: 44 1273 686870 Fax: 44 20 7504 3787 or 44 1273 675740
E-mail: sales@hemsltd.com Web: www.hemsltd.com



Single acting return hydraulic jacks are available in both alloy steel and aluminium, and have 50 and 100mm stroke which pin and bush can be replaced in one or multiple stroke. Jacks are center hole type and are placed on C-sleeves (one over the other) through which center rod passes and nuts are tightened at the ends. Tie rods and nuts are machined from an alloy steel material, hardened and tempered to increase strength and toughness.

Each HEMS Pin Puller comes with tooling and a choice of:

- 2-stage Hand Pump
- Hydraulic Power Pack
- Solenoid Operated Directional Control Valve

HEMS Pin Puller Kit, includes both a 30ton and 50ton jack, suitable for various applications.

2-stage Hand Pump: Suitable for use in the field.

Hydraulic Power Pack: Suitable for workshop and field.

Solenoid Operated Directional Control Valve: Designed to be the safest option. The emergency pendant can stop the motor or reverse the jack direction.



Additional Tooling:



- 30ton capacity single acting
- 50ton capacity single acting
- Pull Rod dia 33x1000 long with 2 nuts
- Pull Rod dia 42x1000 long with 2 nuts
- Sleeve for 30T Jack
- Sleeve for 50T Jack
- C sleeve dia 115 x 135 kg (x4)
- C Sleeve dia 175 x 135 kg (x2)
- Adapter Plate for 30T
- Adapter Plate for 50T
- Threaded Adapter M24 internal x M33 external
- Threaded Adapter M30 internal x M33 external
- Threaded Adapter M30 internal x M42 external
- Carry Box for the jack and tooling without trolley