


Powerful small thermoformer for the most demanding applications

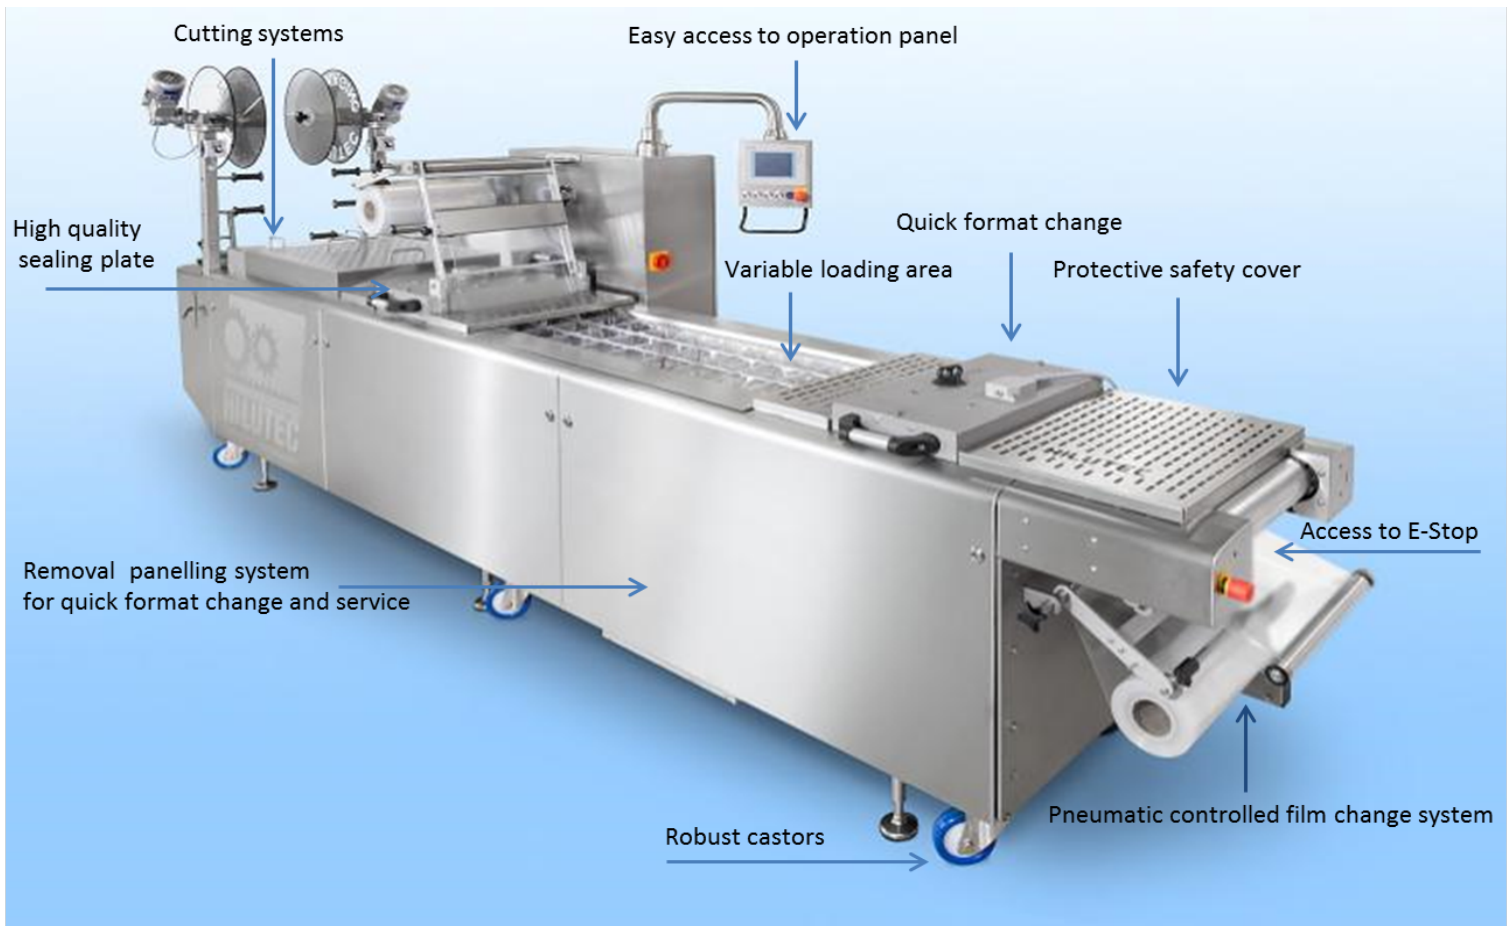

Working Theory

The new generation of the thermoforming machines FUTURE PACK has been developed using a module process allowing to be individually designed to the clients requirements in terms of pack design, efficiency, output, reliability and durability.

The system can easily be integrated in to most packaging lines.

"Quality"

Each mechanical part, forming modules, sealing plate, special shaped cutting systems ect. is made in Germany and locally manufactured.

Our own innovate developement departement provide a wide range of options.


Small, basic high performance machine for thermoforming packaging



How simple and clean foodpacking can be with the thermoformer Model - 100 FP.



Our solution for small to medium operations is the affordable and easy way to use the FP Series thermoformer. It is ideal for meat, fish, pasta, vegetables, dairy, and medical applications.

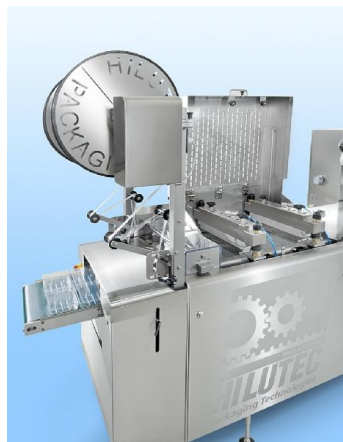


Standard equipment:

- > Clean and hygienic design.
- > Pneumatic controlled film change system.
- > Lubrication free elevating system.
- > Activated charcoal filter for tray pressure.
- > Automatic chain lubrication.
- > Motor driven film unwinder.
- > Intralox discharge belt.
- > Film edge strip rewinder.

General features:

- > Designed for a variety of applications.
- > Stainless steel construction.
- > Small footprint.
- > Suitable for rigid and flexible film.
- > IP-65 protection class.
- > Vacuum and (MAP) packing systems.
- > Economic film consumption.
- > Sanitary design.
- > Easy access for tool change over.
- > Servo drive system.
- > Comprehensive safety system.

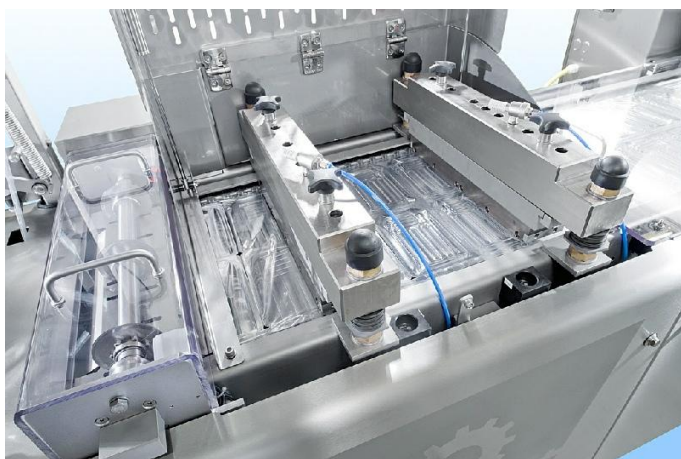

Technical data: FP-100	
➤ Machine length:	3,100 mm
➤ Infeed conveyor length:	200 – 400 mm
➤ Cut off length:	100 – 280 mm
➤ Forming depth:	Max. 100 mm
➤ Top film width:	315 – 455 mm
➤ Bottom film width:	320 – 460 mm
➤ Top film thickness:	130 micron
➤ Bottom film thickness:	Max. 500 micron
➤ Top and bottom film roll:	Max. 400 mm (ext. dia.)
➤ Machine speed:	5 – 8 cycles / minute
➤ Power:	380 V 50 Hz.
➤ Air supply:	7 – 10 bar
➤ Vacuum pump:	100 m3 Hr.
➤ Cooling water consumption:	40 – 70 lt.Hr.

Advantages:

- > Each machine is customized and tailored according to customer's need.
- > Robust stainless steel construction.
- > Fully wash down.
- > High performance low maintenance.
- > Reliable forming and secure sealing.
- > Each mechanical part is manufactured *IN - HOUSE*.
- > Operator friendly design.

Worldwide sales and service support network.