

BTS80 FLOOR CLOSER



BTS80

- Replacement body is 13-7/16"L x 2-3/8"D
- Cover not included
- Mechanical backcheck at approximately 70°
- Selectable delayed action between 175° and 75°
- Delayed action is functional when hold open is not engaged
- Selectable multipoint hold open between approximately 75° and 175°
- Adjustment for hold open between 75° and 105°
- Accommodates doors weighing up to 660 pounds and 4'-6" wide interior and 4'-0" exterior
- Closer adjustment in cement case provides lateral and longitudinal adjustment of 1/4" and height adjustment of 5/32"

MFG #	SIZE	EZ #
BTS80 2	2	036857
BTS80 3	3	036858


D

ELECTROMAGNETIC DOOR HOLDER


BHMA
GRADE 1



EM508 24VAC

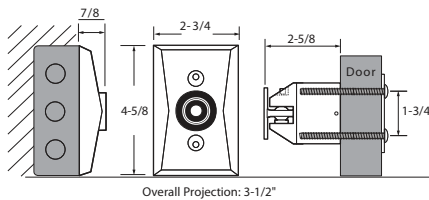

EM504 24VAC

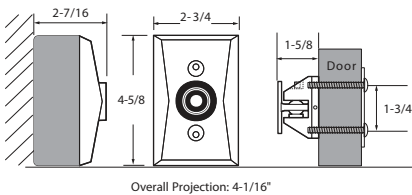

EM508 24VAC

- Dual voltage capability reduces stocking requirements
- Low current draw allows savings on power supplies and backup batteries
- Optional extension rods fit on standard catch plate to accommodate deeper door to wall conditions
- Low residual magnetism allows easy release of door
- All electrical values +10% to -15%.
- Floor & wall mounted styles
- Can be manually pulled from hold open position
- Silent operation
- Holding force 15-25 lbs nominal
- Can be manually pulled from hold open position with 25-40 maximum hold open force
- Voltage: 24 VAC/DC or 120 VAC
- Amps: .015
- Meets ADA requirements with minimal spring force door closers
- ANSI A156.15 Grade 1
- UL and cUL listed
- Finish: Satin chrome

EM504

- Semi flush wall mount
- Overall projection: 3-1/2"

EM508

- Surface wall mount
- Overall projection: 4-1/16"

MFG #	DESCRIPTION	EZ #
EM504 24120 689	Long Catch	028943
EM508 24120 689	Short Catch	028942