


無門檻：採用三邊阻音條(RP78SI)+落下式阻音條(RP38)

RP78SI RP38

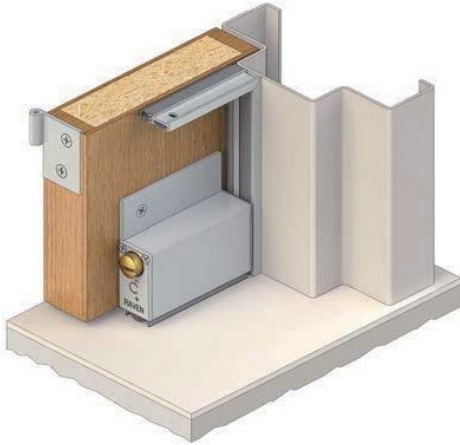

(門扇與地板縫隙需小於2cm)

RP78SI

An acoustic medium temperature smoke door frame seal designed for installation on door stops. Its aluminium carrier is sturdy and slotted for adjustment with concealed fixings. It is quick and easy to install around the jamb and head and can be fitted without removing the door. The RP78SI can be mitred or butt jointed for a neat finish.

Can be used in conjunction with the Raven RP85, RP165, RP355, RP385, RP955, RP1265, RP1275 or RP1285 automatic door bottom seals.

Location: Head and jamb of single and double butt hinged doors.

Min/Max Gap: 0mm to 6mm.

Finish: Satin clear (silver), bronze anodised aluminium (15µm) or paint at extra cost (page 7).

Fixings: Concealed screw fix. Zinc plated, cross recess head S.T. screws, self drilling screws (metal) and cover strip supplied.

Seal: RP394SI. Grey or light grey silicon rubber (SE).

Sizes: Available in door set sizes or stock lengths.

Approvals

Cart: G.V.Y.L.R37913.
ANSI/BHMA A156.22.
Acoustic AUS/NZ: NCC Spec. F5.5. UK/EU: Approved Document E. Rated to BS EN ISO 717.1.
Fire AUS/NZ: NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2 & App. C6.1.1. UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).
FRL & FRR: /240/60 and FD240. Gaslet flammability index 1 when tested to AS1530.2.
Smoke NCC Spec. C3.4. AS1530.7 & BS EN 1634-3. Meets smoke leakage rates specified in AS6905 & EN 13501-2 "S4", "S4".
Energy NCC Pt. 3.12.3.3 & J3.4.



有門檻：採用四邊阻音條(RP78SI)

RP78SI



RP38

A heavy duty, automatic door bottom seal that is spring loaded to lift clear of the floor when the door is opened. It is self levelling and reversible for left and right handed operation. Acoustically designed, it features an EPDM foam gasket for acoustic door applications and doubles as a kick plate when semi-morticed. Operated automatically by pressure against the door jamb or stop on its adjustable brass strike.

Location: Face mounted or semi-morticed into bottom of single and double butt hinged doors. For semi-mortice minimum door thickness of 50mm for rebated meeting stiles and 40mm for plain meeting stiles is required. The RP38 can also be face mounted to the bottom of metal doors.

Min/Max Gap: 3mm to 13mm.

Finish: Satin clear (silver) anodised aluminium (15µm) or paint at extra cost (page 7).



Fixings: Screw fix. Colour matched escutcheon plates and zinc plated cross recess head S.T. screws supplied.

Seal: RP338. Black EPDM sponge (SE).

Sizes: 1500mm, 1220mm, 1070mm, 920mm, 610mm, 450mm to 300mm (min). Seals cut back to exact size.


Approvals

Acoustic AUS/NZ: NCC Spec. F5.5. UK/EU: Approved Document E. Rated to BS EN ISO 717.1.
Fire & Smoke AUS/NZ: NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2 & App. C6.1.1. UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).
FRL & FRR: /240/30 and FD240.
Energy NCC Pt. 3.12.3.3 & J3.4.
Design for Access and Mobility: High efficiency mechanism to assist with the closing force requirements detailed in AS1428.1.
Durability: Tested to over 1,000,000 operating cycles without failure.
Patented.



雙開門中間：採用阻音條(RP48)

RP48

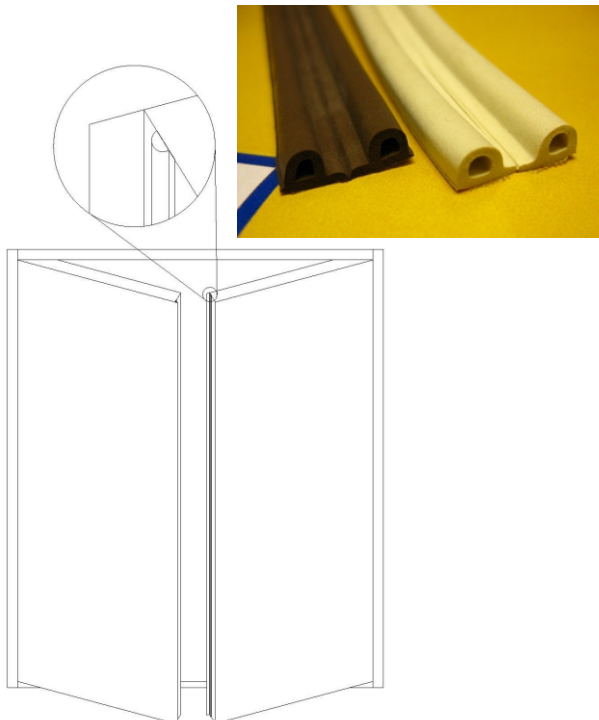

RP48



Location: Perimeter of doors and windows.

Min/Max Gap: 3mm to 5mm (user determined).

Fixing: Self adhesive. *Note: Contact surface must be clean, smooth and if painted, well cured.*

Seal: White, brown or grey EPDM closed cell sponge.

Sizes: 5m coil pack (2 x 2.5m), jumbo reel (2 x 50m).

Approvals: Energy NCC Pt. 3.12.3.3 & J3.4.

