




Patent Pending




T6 LED Lamp



LD224 LED Lamp
Actual Size

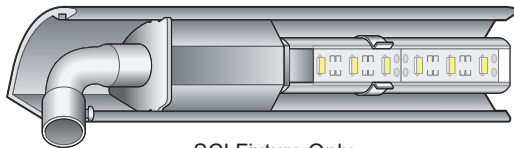

SCI Fixture Only

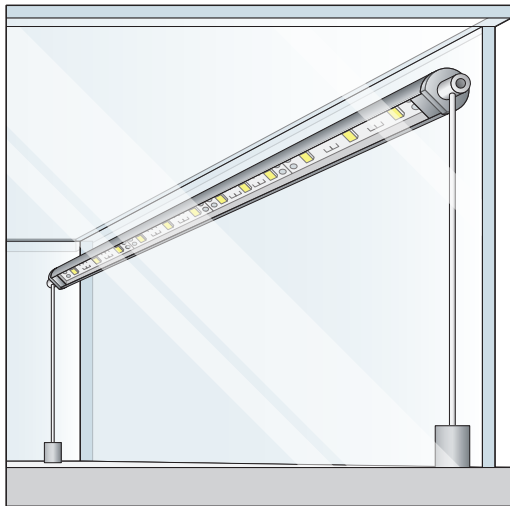

Pivoting Rod System

Ultralite® LED Light Systems (12v DC)

Specifications

- Input: 100 - 277Vac. 50 - 60 Hz.
- Low profile LED linear fixture with Exterior Driver
- Extruded aluminum shield in an anodized finish.
- All fixtures made to specified length $\pm 1/32"$.
- Available sizes: Custom.
- 2 year warranty.
- Wired with 6' primary power leads.
- Magnetic under shelf clips available.
- Mounting accomplished with mounting clips.
- Pivoting needle supports for the pivoting pedestal style LED.

Source: Showcase Components Inc. (SCI), UL Listed E494164.

LED Life: 70% lumen maintenance up to 50,000 Hrs. of continuous power on.

CCT Tolerance: +/- 300K defined by ANSI.

LED's Per Ft. : 18.0

Beam Angle: 120° - Variable.



UL Standard: 1598
UL File Number: E494164

| WATTS/FT. | SURFACE TEMP. | CRI | COLOR TEMP. | LUMENS / M. |
|-----------|----------------------|-------|-------------------------------------|-------------|
| 4.5w | 30°C + Ambient | 80,90 | 3500K CCT 4200K CCT 5700K CCT | 905-1209lm |

| MODEL | COLOR TEMP. | STANDARD FINISHES | FEED TYPE | MATERIAL |
|-------|-------------|-------------------|---|----------------------------------|
| LD224 | Custom | Polished Satin | Straight (End Feed) 90° (Front Feed) | Acrylic Lens with Aluminum Shell |



Showcase Components Inc.

14335 Iseli Rd. Santa Fe Springs, CA 90670
sales@ShowcaseComponents.com
www.ShowcaseComponents.com

Division of Alumafab Corp.

(800) 982-5548 (562) 630-6440 Fax: (562) 633-1859