


# PRODUCT DATA SHEET

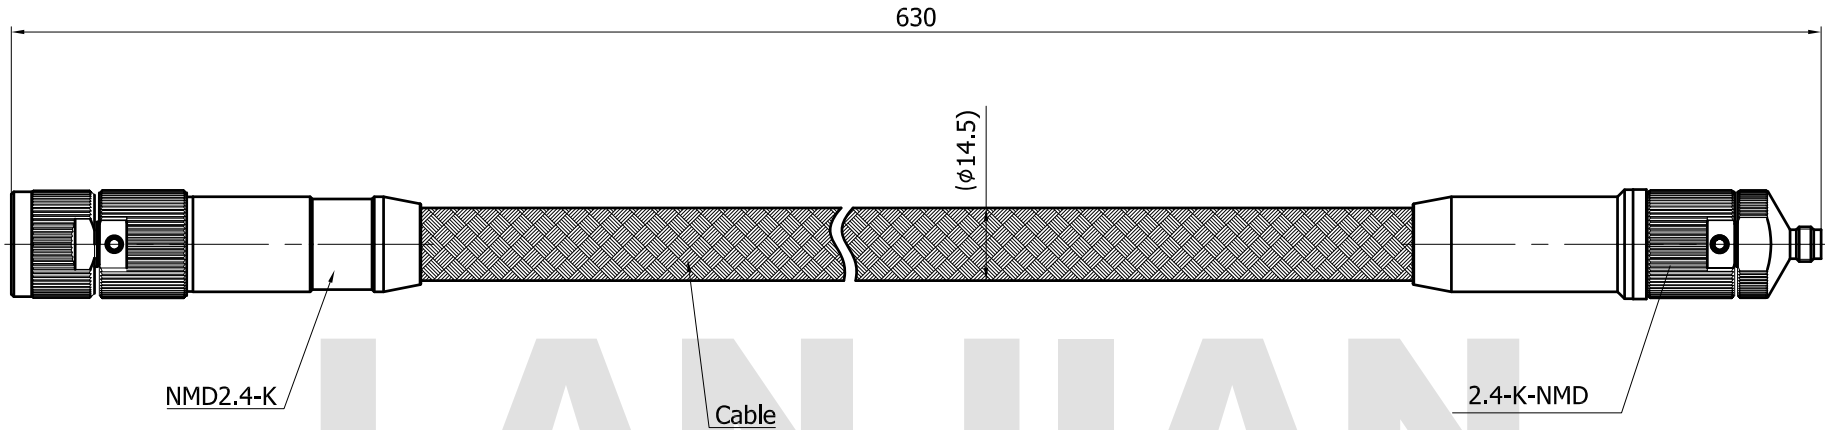

**MATERIAL:**

BODY: STAINLESS STEEL  
 CONTACT: BERYLLIUM COPPERBRASS  
 INSULATOR: PEI

**PERFORMANCE:**

IMPEDANCE: 50 OHMS  
 FREQUENCY: 50GHz  
 VSWR:  $\leq 1.30$

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"	MATERIAL :			<b>LANJIAN ELECTRONICS</b> 38 Hengtong Road, Xinqu Dingmao Zhenjiang, 212009, Jiangsu, P. R. China	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM				
	TOLERANCES :				
	X.X	$\pm 0.20$	ANGULAR : $\pm 1^\circ$	DEBURR AND BREAK SHARP EDGES	
	X.XX	$\pm 0.10$	FILLET'S R/C : $\pm 0.10$		
	X.XXX	$\pm 0.01$	SURFACE FINISH : Ra 1.6		
		NAME	DATE	SIGNATURE	TITLE <b>Z50SSPN-NMD2.4K/2.4K-NMD                  -630                  cable assembly</b>
	DRAWN	X.C.W	10/28/2020		
	CHK'D	H.Z.Y	10/28/2020		
	APPV'D	H.Z.Y	10/28/2020		
MFG					
PROJECTION		SIZE	SCALE	DWG No.	REV.
		A3	3:1		<b>A</b>
DO NOT SCALE THE DRAWING					PAGE 1 / 1