


**SPECIFICATIONS:**

Impedance: 50 Ohm  
 Frequency: DC-18 GHz  
 VSWR: 1.25:1 max.  
 Operating temp. : -65°C - +125°C

Part	Material	Plating
Body	Brass	Nickel
Conductors	Beryllium Copper	Gold
Insulator	PTFE	---

**RoHS Compliant**

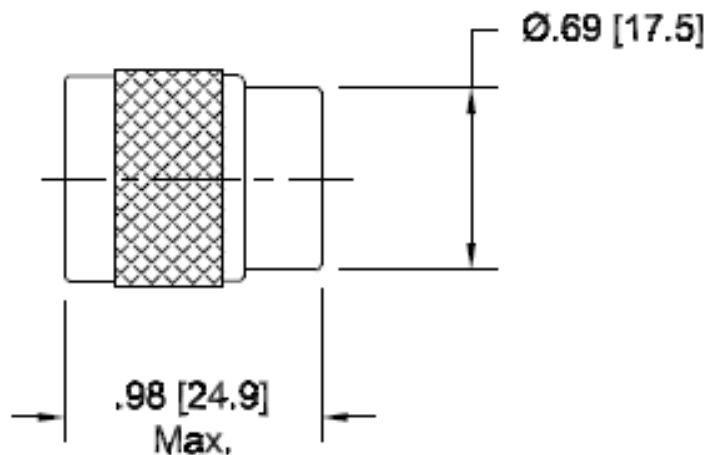

Dimensions are for reference only, and are subject to change without notice.



**Premier RF**  
 17 Roslyn CT  
 Patchogue, NY 11772  
 PH: 631-447-3804  
 sales@premier rf.com  
 www.premier rf.com

07/14/2016  
 APPROVED  
 A. Ianacci

<b>PART NUMBER</b>	<b>PRF-TE2M218-BN</b>
<b>DESCRIPTION</b>	<b>TYPE N TERMINATION DC-18 GHz, 2 WATT</b>