

SPECIFICATIONS:

Impedance: 50 ohm

Frequency Range: DC~ 4 GHz


VSWR: 1.20:1 Max.

Insertion Loss: 0.25dB @ 4 GHz

Operating Temperature range: -45°C~85°C

Durability: 500 Cycles

Part	Material	Plating
Body	Brass	Nickel
Center Contact	Beryllium Copper	Gold
Insulator	PTFE	---

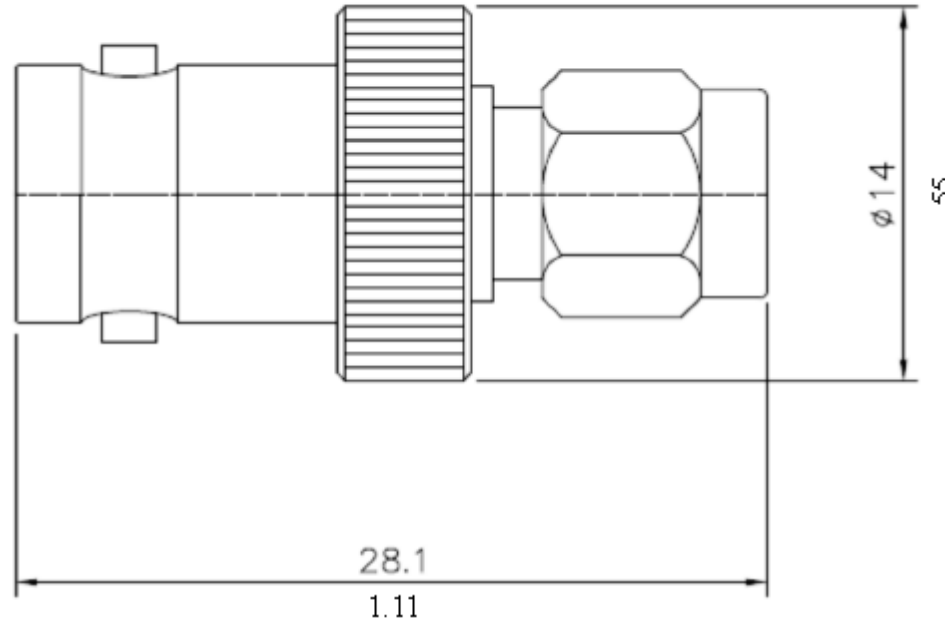

Dimensions are in mm,
for reference only, and are
subject to change
without notice.



Premier RF
17 Roslyn CT
Patchogue, NY 11772
PH: 631-447-3804
sales@premier rf.com
www.premier rf.com

8/23/2012
APPROVED
A. Ianacci

PART NUMBER	PRF-AD1M3F
DESCRIPTION	SMA MALE TO BNC FEMALE ADAPTER