

Specifications


Frequency range: DC-4GHz

Nominal Impedance: 50 Ohm

VSWR: 1.15:1 max. @ 4 GHz

Oper. Temperature range ; -65C- +125C

RoHS Compliant

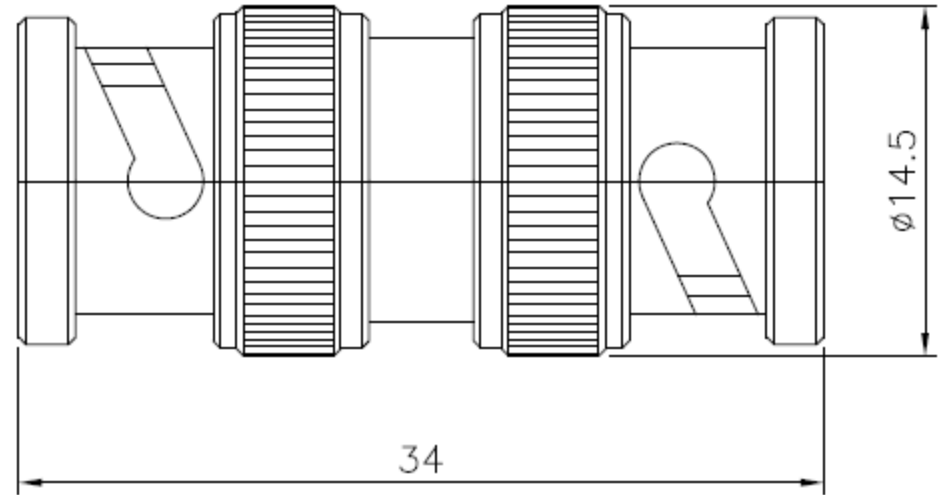

Adapter Part

Material

Plating

| | | |
|----------------|-------|--------|
| Body | Brass | Nickel |
| Center contact | Brass | Gold |
| Insulator | PTFE | N/A |



Premier RF
 17 Roslyn CT
 Patchogue, NY 11772
 PH: 631-447-3804
 sales@premier rf.com
 www.premier rf.com

| | | |
|------------------|--------------------|---|
| Dimensions in mm | PART NUMBER | PRF-AD3M3M |
| 03/10/2012 | DESCRIPTION | BNC MALE TO BNC MALE ADAPTER, DC-4 GHz |
| APPROVED | | |
| C. Smith | | |