

KR 535 Tabmaster



The KR 535 makes tabbing of paper products faster and easier than ever. Here's why....

PERFORMANCE

Just like other KR equipment, the KR 535 performs day in and day out. Production rates in excess of 40k tabs per hour combined with a roll capacity of nearly 50k tabs makes the KR 535 another **real deal** - productive, reliable and simple to operate. The KR 535 is engineered to perform with less operator training and setup time.

VERSATILITY

All major types of tabs as well as pressure sensitive stamps and labels of various shapes and sizes can be placed on a wide assortment of products. Right or left edge tabbing, bump turn attachments, wide label kits and a folder interface conveyor option makes the KR 535 a **truly flexible system** that can grow with your business.

VALUE

World-class manufacturing systems are used to help keep costs low. This means **you get more for your dollar with KR tabbing systems**. No other tabbing system matches the performance, versatility and ease of use of a KR 535. Realize a profit and performance edge with the KR 535.



RUGGED CONSTRUCTION

Designed and built to last by skilled craftsmen, the KR 535 is constructed in the same tradition as all our other mailroom products – **heavy duty**. A straight forward and trouble free design utilizing industry standard motors and controls makes the KR 535 **simple to operate and maintain**. You can count on years of dependable service from your KR 535.

KR 535

Tabbing System

General Specifications

Physical

Length	50"	127 cm
Height	70"	178 cm
Width	26"	66 cm
Crated weight	800lbs	363kg
Tabletop height	33"	84 cm

Electrical Requirements

Voltage	120 VAC
Current	15 amps
Interface	inkjet base/conveyor interlock

Production Rate

Single tab	30k pph
Double tab	30k pph

Tab Head

Physical

Length	29"	74 cm
Height	36.5"	93 cm
Width	14"	35 cm
Crated Weight	120 lbs	54 kgs

Material Handling

Min tab: .75" round	Min label: .38"W x .75"L
Max tab: 2.0" round	Max label: 3"W x 2"L STD
Type	opaque, clear or plain paper
Tab roll size	16" diameter (40k of 1"Ø, 50k of .75" Ø)

Tab Base

Physical

Length	50"	113 cm
Height	33" *	84 cm
Width	26"	66 cm
Crated Weight	780 lbs	354 kgs

Material Handling

Min stock size	3" x 5"
Max stock size	13" W x 14"L (labeling only) 11"W x 14"L (Tabbing/labeling)
Thickness	Single sheet up to .18" (.62" labeling only)


Options

- 5" base height adjustment (Hydra-lift)
- Narrow (1.25") product handling
- 5" wide label kit
- Fan-fold label kit
- Magnetized label kits


Specifications subject to change without notice. Guards have been removed for clarity. Do not operate machine without guards in place.



A straightforward operator interface simplifies operator training and setup.

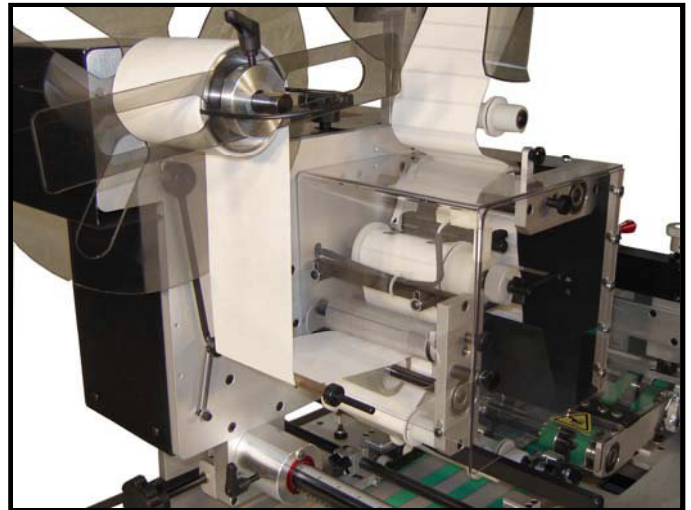

Run 3" wide labels on the standard KR 535. Even wider labels are possible using the optional 5" wide label kit.

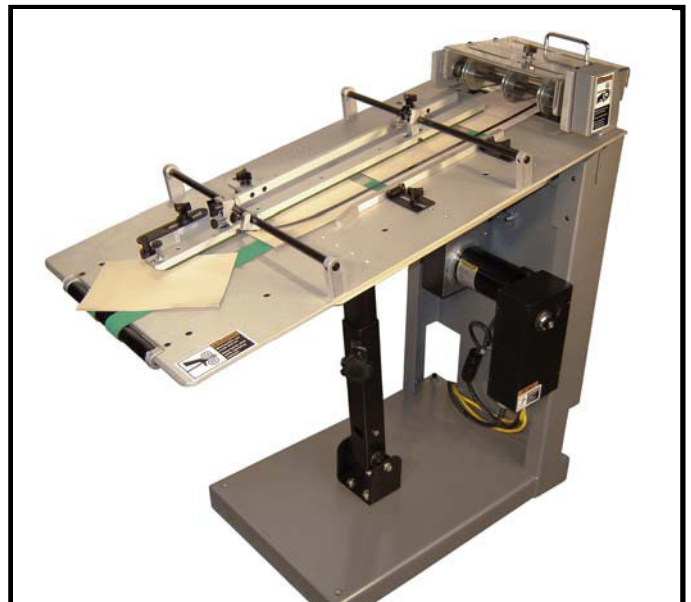

Run the KR 535 inline with a folder using the KR 415 Folder Interface Conveyor.