


Ten (10) Unused Ohio Brass Stand off insulators 138 kv system, 145 kv , 350 kv Bil, Type TR-216,
porcelain
Dimension: 7.87" diameter x 24" height 66.1 lbs each



Porcelain Station Post Characteristics - 250kV to 350kV BIL

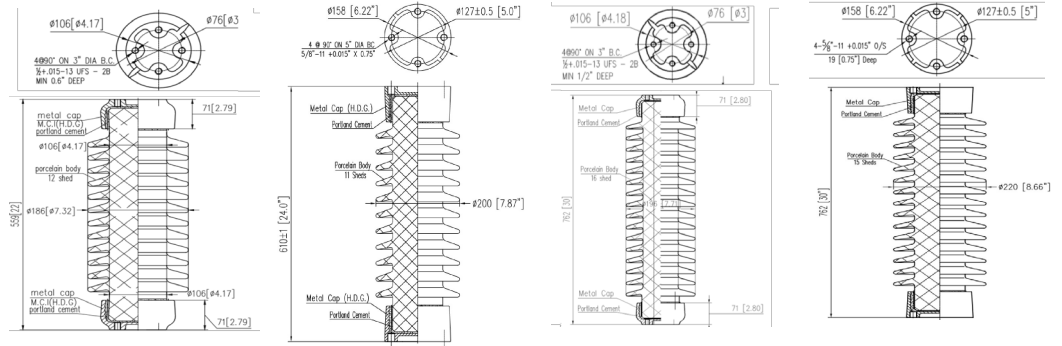

Catalog Number	PSP214-3001	PSP267-3002	PSP216-3001	PSP278-3002
BIL kV	250	250	350	350
Technical Reference Equivalent	TR-214	TR-267	TR-216	TR-278
Height Inches (mm)	22 (559)	24 (610)	30 (762)	30 (762)
Leakage Distance In (mm)	43 (1092)	43 (1092)	72 (1829)	72 (1829)
Wet 60Hz Withstand kV	100	100	145	145
Cantilever Strength lbs. (kN)	2000 (8.9)	4000 (17.8)	1500 (6.7)	3000 (13.4)
Tension Strength lbs. (kN)	14000 (62)	25000 (107)	16000 (72)	25000 (107)
Compression Strength lbs. (kN)	15000 (66.7)	60000 (267)	25000 (112)	60000 (267)
Torsion Strength in-lbs (N-m)	12000 (1356)	20000 (2260)	15000 (1700)	40000 (4520)
Net Weight lbs (kg)	45.2 (20.5)	61.7 (28.0)	66.1 (30.0)	83.1 (37.8)

STATION POSTS

