


UNDER HOIST OIL DRAINS



Features: Models 8G-Drain and 18G-Drain

- ◆ Spout for evacuation
- ◆ Hand grips top and bottom for ease in evacuation
- ◆ Four 3 1/2" ball bearing wheels
- ◆ Height adjusts from 48 -71"
- ◆ Translucent polyethylene body allows easy viewing of fluid level
- ◆ 18" funnel with non-corrosive telescoping tube
- ◆ 3/4" evacuation valve (18 gallon model only)

STANDS

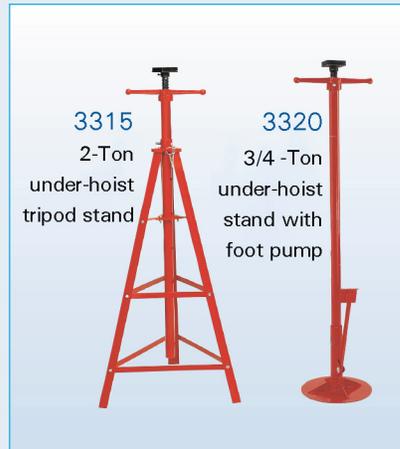

24G-SE-Drain

Self-evacuating
oil drain



Features: Self-Extracting 24G Oil Drain

- ◆ 17" diameter funnel
- ◆ 7' evacuation hose
- ◆ 24 gallon capacity
- ◆ Pressure gauge included
- ◆ Sight glass

TRANSMISSION JACKS



Features: Model 3190-TJ

- ◆ Two-stage telescopic ram
- ◆ Universal head allows 42° forward tilt, 46° back tilt and 12° side tilt
- ◆ Fully adjustable universal saddle with spring loaded corner brackets allows easy tool-free adjustment
- ◆ Foot operated pump allows use of both hands to position and align saddle with transmission

Features: Model 2158-TJ

- ◆ For use with in-ground and above-ground lifts
- ◆ Single-stage telescopic ram
- ◆ Wide base for stability
- ◆ Foot operated pump allows use of both hands to position and align saddle with transmission

SPECIFICATIONS

	2158-TJ	3190-TJ
Capacity	1,100 lbs.	1,100 lbs.
Low height	45"	33 1/2"
High height	71"	72 1/2"
Shipping weight	97 lbs.	219 lbs.