

ELECTRIC DEADBOLT

A



- Projects the bolt only while power is applied
- Lock or unlock by remote switch, key switch, timer or other electrical contact
- Size: 1-3/4"W x 6-3/4" L (including keeper)
- Bolt diameter: 5/8"
- Projects: 5/8"
- Keepers included

MFG #	DESCRIPTION	EZ #
103	Fail Safe 24VAC	009758

ARMoured DOOR LOOP



- For use with electrified locks
- Brings electric current from the hinge side of a door frame across to the door
- 18" flexible armored cable
- End brackets are deep drawn anodized aluminum to conceal wire connections

MFG #	DESCRIPTION	EZ #
271	Door Loop	035045

BATTERY PACK



- Long life sealed replacement 9V battery pack for 11A, PG10 & LL1


MFG #	DESCRIPTION	EZ #
BP6	Battery Pack	000532

POWER SUPPLIES

S



BPS12 1

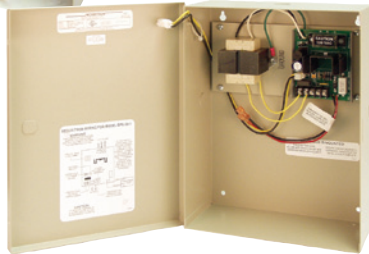

BP24 1



B12 5



PSP24

BPS12/BPS24

- Filtered and regulated DC power supply
- Battery charging circuit operates while providing DC output (battery not included)
- 1 fused output
- All UL components
- LED power indicator
- Fire alarm interface
- Cabinet size: 12" x 9" x 4"

B12 5

- 12 volt 5 amp hour battery

PSP24

- 350mA 24DC plug-in power supply

MFG #	DESCRIPTION	EZ #
B12 5	5AH 12V Battery	027587
BPS12 1	1 Amp 12V Power Supply	013333
BPS24 1	1 Amp 24V Power Supply	013334
PSP24	24DC Plug-In Power Supply	028252

KEYPAD



DK26SS

- Weather & vandal resistant unit is cast stainless steel with 11 EPDM rubber keys
- Fits narrow stile mullion
- Digital keypad system circuit board mounts in a metal enclosure provides for 59 multiple users, expandable to 119
- 5 amp DPDT relay output for lock control and alarm shunt, or other device interface, has REX input
- 16' 12 conductor, 22 gauge keypad cable
- 3 LEDs and bell button
- Current draw: 7mA@ rest, 160mA active, 12VAC or VDC 20mA@ rest, 190mA active, 24VAC or VDC
- Operating temperature: CPU 0°C to +70°C, keypad -30°C to +70°C

MFG #	DESCRIPTION	EZ #
DK26SS	Keypad	060615