


The Brightest and Toughest T5-8 Lamp Fluorescent Fixture on the Market

Description


- 91.6% Efficiency Miro-4 Super Reflector for T5-8 Lamp.
- Durable .063 Aluminum is Tog-Locked for maximum strength. (No assembly required).
- Fixture is well vented for maximum heat dissipation and longer electrical component life.
- Knockouts for end wiring and occupancy sensors. Optional Gripper hanging system.
- Wire guard or Acrylic lens will take the hit from balls and hockey pucks.
- Life time warranty on fixture housing.
- Size 4" High x 18 5/8" Wide x 48 1/2" Long x .063 Aluminum or 22 Gage Galvanized Steel.

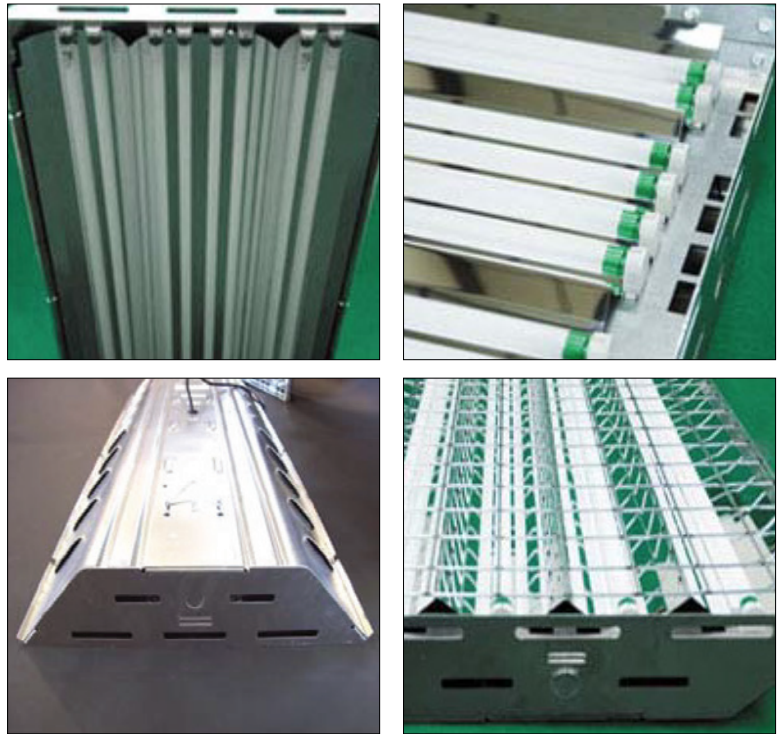

BL-T5-8L Ordering Information: (Example: BL-T5-8L/277/A/W6/L7/15P/ACL/LI/GHK6)

Lamp	Specify Voltage	Specify Fixture	Whip & Plug		Options		
4 4L	120 to 480	Steel	ST	6'	W6	Lamp Included	LI
6 6L		Aluminum	AL	9'	W9	Wire Guard	WG
8 8L				12'	W12	Acrylic Lens	ACL
				20'	W20	Pendent Mount Bracket	PM
				15 Amp 125V	L5-15P	Gripper Hanging Kit	GHK
				15 Amp 277V	L7-15P		6'
				20 Amp 480V	L8-20P		8'
							10'
							12'

T5-8 Lamp IES File

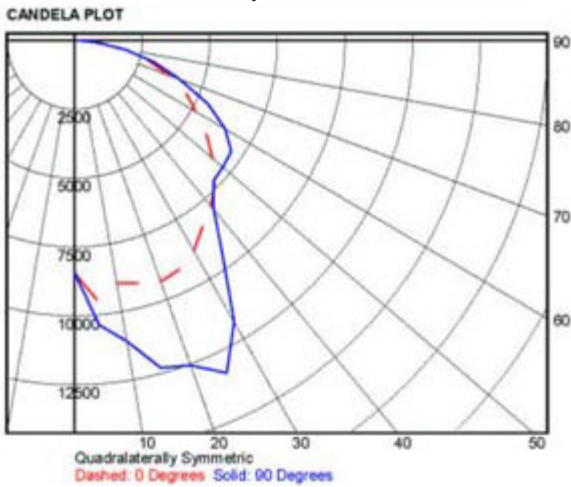

SUMMARY DATA

EFFICIENCY (Total):	91.6 %
EFFICIENCY (Downlight):	91.6 %
EFFICIENCY (Uplight):	0.0 %
CIE CLASSIFICATION:	DIRECT
SPACING CRITERION (0-Deg.):	1.48
SPACING CRITERION (90-Deg.):	1.57
LUMENS/LAMP:	5000
NO. OF LAMPS:	8
LUMINOUS OPENING:	RECTANGULAR
Width:	1.55 (Feet)
Length:	4.05
Height:	0.00
INPUT WATTS:	472
RP-1-83 VDT CONFORMANCE:	NON-CONFORMING

ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Luminaire
0 - 30	9302.7	23.3	25.4
0 - 40	15577.1	38.9	42.5
0 - 60	27571.0	68.9	75.2
60 - 90	9068.3	22.7	24.8
0 - 90	36639.3	91.6	100.0
90 - 180	0.0	0.0	0.0
0 - 180	36639.3	91.6	100.0



PATENTED

www.bestlights.com



Fixture Warranty

Best Lights, Inc. warranty fixtures to be free from defects in material and workmanship under normal use and service for a period of five (5) years from date of shipment. If found to be defective by us, we will replace the non-performing parts. Light bulbs and ballast on separate warranty.

