

SPECIFICATIONS:

Impedance:

Male side: 50 Ohm

Female side: 75 Ohm


Frequency: DC-4 GHz

VSWR: 1.35:1 Max.

Input Power: 1 watt avg.

RoHS Compliant

Part	Material	Plating
Body	Brass	Nickel
Contacts	Beryllium Copper	Gold

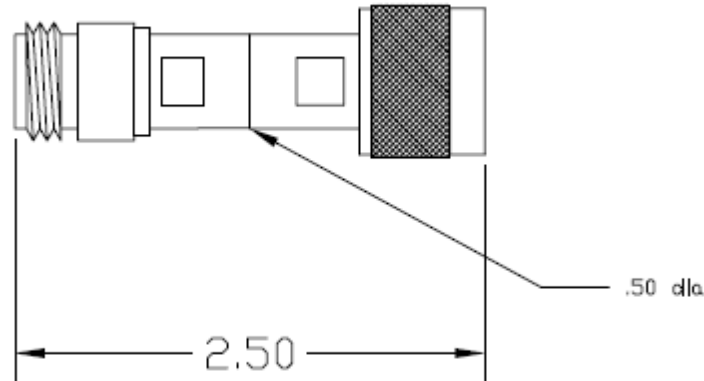

Dimensions are for reference only, and are subject to change without notice.



Premier RF

17 Roslyn CT
 Patchogue, NY 11772
 PH: 631-447-3804
 sales@premier rf.com
 www.premier rf.com

02/12/2012
APPROVED
A. Ianacci

PART NUMBER	PRF-IM2M2F
DESCRIPTION	50 OHM N MALE-75 OHM FEMALE IMPEDANCE MATCHING PAD