


STEALTH 3250B

A128_0218

Booth filter with dump regulator, gauge, and multiport manifold

Perfect after-filter for desiccant dryers and as final paint air filter

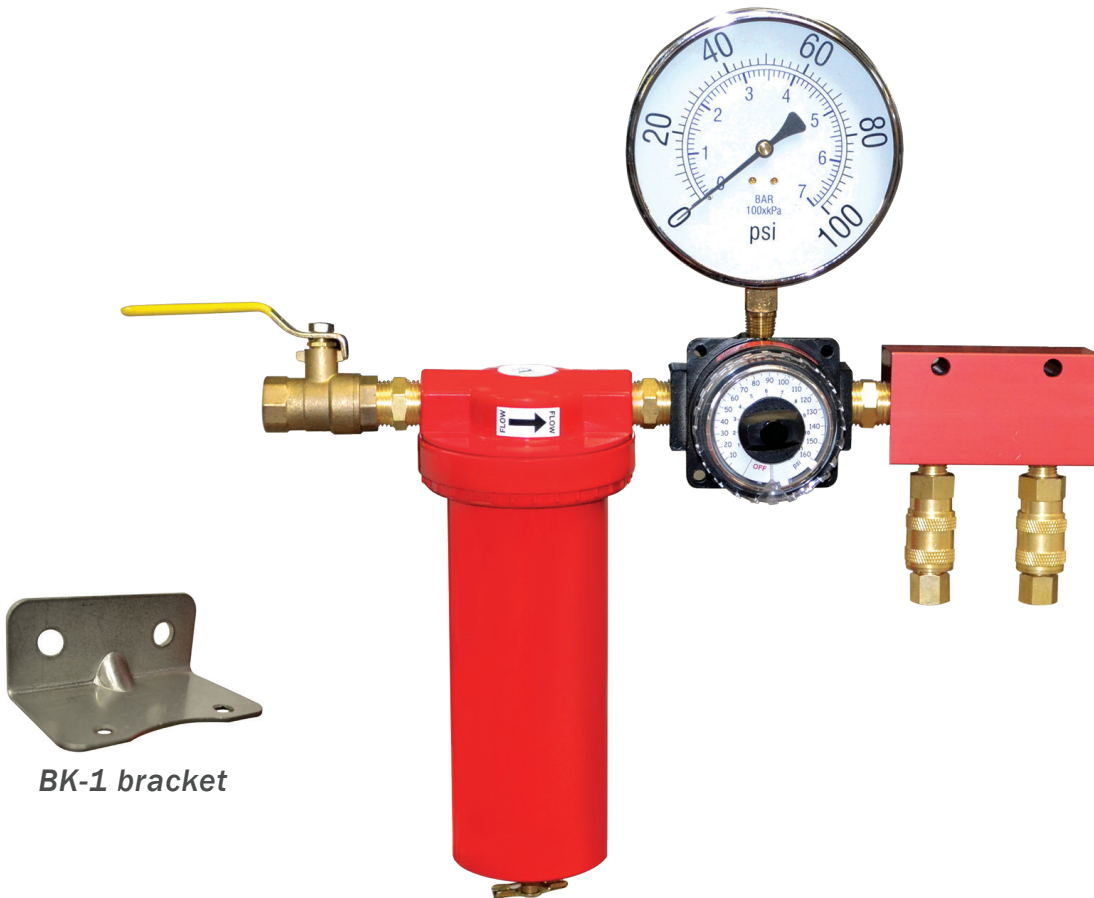

BK-1 bracket

Features & Benefits

- Quick disconnect clamp ring design
- 0.01 micron at 99.99998% efficiency
- Equipped with brass petcock manual drain
- Unit comes with a BK-1 bracket and BV-051 ball valve
- 0-100 PSI oversized gauge with glass face for quick, easy reading, and MA500-4 multiport manifold with quick disconnects
- Cleaner compressed air with no oil to your applications
- ½" high flow regulator/gauge

Specifications

<i>Max. Pressure</i>	200 PSIG
<i>Flow Capacity</i>	60 SCFM at 100 PSI
<i>Max. Operating Temp.</i>	125°F
<i>Replacement Element</i>	3C-060
<i>Height</i>	15.00"
<i>Length</i>	15.75"
<i>Depth</i>	3.75"
<i>Weight</i>	8 lbs.



(800) 521-9200

www.driair.com | www.rti-pbe.com

[f](https://www.facebook.com/RTIPBE) @RTIPBE

[i](https://www.instagram.com/rti_pbe) @rti_pbe

