


Straight, five conductor, stranded, rubber insulation, rubber jacket, incorporating clothing clip, in-line Push-To-Talk switch with built in amplifier. Approx. 77 feet long. Terminated with molded quick disconnect and an MS3116 type connector.



CX-4620/AR
5995-00-786-4574
MIL-DTL-22442/10-1
P/N H127D900-1

Retractable, four conductor, stranded, rubber insulation, rubber jacket. Approx. 15 inches retracted, 72 inches extended. Terminated with MS3116 type connector and molded quick disconnect plug.




CX-4621/AR
5995-00-705-1349
MIL-DTL-22442/11-1
P/N 127D600

Retractable, four conductor, stranded, rubber insulation, rubber jacket. Approx. 15 inches retracted, 72 inches extended. Terminated with MS3116 type connector and U-61/U connector.




CX-4622/AR
5995-00-786-4573
MIL-DTL-22442/12-1
P/N H127D500

Retractable, five conductor, stranded, rubber insulation, rubber jacket, incorporating in-line switch with built-in amplifier, clothing clip. Approx. 40 inches retracted, 128 inches extended. Terminates with MS3116 type connector and a molded quick disconnect plug.




CX-4623/AR
5995-00-705-1350
MIL-DTL-22442/13-1
P/N H127D800-1

Straight, five conductor, stranded, rubber insulation, rubber jacket. Approx. 25 inches long. Terminated with molded transformer plug (Plug tip MIL-type PJ-054), and molded disconnect plug.

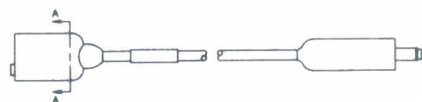

CX-4831/AR
5995-00-631-8566
MIL-DTL-22442/14-1
P/N H127D700-1

Straight, five conductor, stranded, rubber insulation, rubber jacket. Approx. 6 inches long. Terminated with molded disconnect plug. Opposite end has molded mounting block incorporating JJ-048 pins and four single conductor leads terminated with pins.




CX-4832/AR
5995-00-961-8516
MIL-DTL-22442/15-1
P/N H-1003

Straight, five conductor, stranded,, polypropylene insulation, rubber jacket. Approx. 6 feet (72 inches) long. Terminated with molded disconnect plug and MS 3126 type connector.



CX-7888/AIC-22(V)
5995-00-961-8526
MIL-DTL-22442/16-1
P/N H127D200-1

Straight, five conductor, stranded, polypropylene insulation, rubber jacket, incorporating clothing clip, amplifier, and hand-held switch. Terminated with molded quick disconnect and an MS3126 type connector. The switch assembly contains a secondary switch permitting the use of this cable with either carbon or dynamic microphones.




CX-7889/AIC-22(V), 75'
5995-00-961-8527
MIL-DTL-22442/17-1
P/N H178D300-1

CX-7890/AIC-22(V), 15'
5995-00-961-8528
MIL-DTL-22442/17-2
P/N H178D300-2

CX-11754/AIC-22(V), 6'
5995-00-249-5153
MIL-DTL-22442/17-3
P/N H178D300-3

Straight, five conductor, stranded, rubber insulation, rubber jacket. Approx. 12 inches long. Terminated with a U-384/U connector. Opposite end has molded mounting block incorporating JJ-048 pins and four single conductor leads terminated with pins.

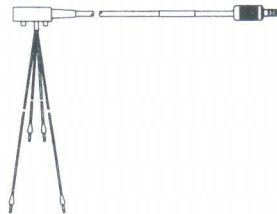

CX-12972/AR
5995-01-016-4130
MIL-DTL-22442/19-1
P/N H126D1000

Straight, five conductor, stranded, rubber insulation, rubber jacket. Approx. 25 inches long. Terminated with molded transformer plug (Plug tip MIL-type PJ-054) and a U-385/U connector.




CX-12973/AR
5995-01-046-8319
MIL-DTL-22442/20-1
P/N 126C1001

Retractable, four conductor, stranded, rubber insulation, rubber jacket. Approx. 15 inches retracted, 72 inches extended. Terminated with MS3116 type connector and U-385/U connector.



CX-12974/AR
5995-01-048-5924
MIL-DTL-22442/21-1
P/N H126C1002

Retractable, five conductor, stranded, rubber insulation, rubber jacket, incorporating in-line switch with built-in amplifier, clothing clip. Approx. 40 inches retracted, 128 inches extended. Terminates with MS3116 type connector and a U-385/U connector.



CX-12987/AR
5995-01-048-5925
MIL-DTL-22442/22-1
P/N H126C1005-1

Straight, five conductor, stranded, rubber insulation, rubber jacket, incorporating clothing clip, in-line Push-To-Talk switch with built in amplifier. Approx. 77 feet long. Terminated with a U-385/U connector and an MS3116 type connector.



CX-12988/AR
5995-01-046-8318
MIL-DTL-22442/23-1
P/N H126C1006-1

Straight, five conductor, stranded, rubber insulation, rubber jacket. Terminated with a U-385/U connector and a U-384/U connector.




CX-13017/AR
5995-01-011-9623, 2'4"
MIL-DTL-22442/24-1
P/N 1099AS100

CX-13017/AR
5995-01-016-4131, 3'4"
MIL-DTL-22442/24-3
P/N 1099AS102

CX-13017/AR
5995-01-018-9807, 2'8"
MIL-DTL-22442/24-2
P/N 1099AS101


CX-13017/AR
5995-01-022-1755, 7'0"
MIL-DTL-22442/24-4
P/N 1099AS103

Coiled, six conductor, branched, stranded, teflon insulation, rubber jacket. Approx. 42 inches long before coiling. Main trunk is terminated with a U-75/U type plug with a built-in transformer. Branches are terminated with a U-172/U connector and a U-173/U connector. Provided with M22442/26-2 cord as extension.

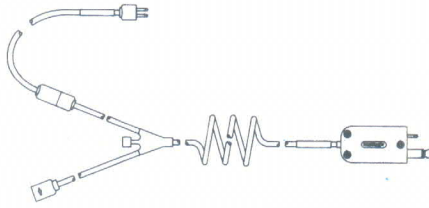


CX-13126/A
1660-01-209-3117
MIL-DTL-22442/26-3
P/N H13126

Straight, six conductor, stranded, teflon insulation, braided nylon jacket, binaural, interconnects earphones. Terminated with a U-384/U connector and a U-172/U connector for the microphone circuit, and pin terminals. Includes one large grommet and two small grommets.

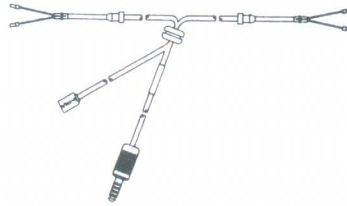


CX-13128/A
5995-01-095-2735
MIL-DTL-22442/28-1
P/N H765AS288-1

Branched, six conductor, stranded, teflon insulation, rubber jacket. Approx. 25 inches long with a 3 inch branch. Main trunk is terminated with a U-75/U type plug with a built-in transformer and a U-173/U connector. Branch is terminated with a U-172/U connector.

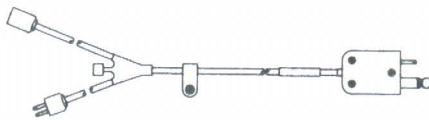

CX-13155/A
8475-01-128-9733
MIL-DTL-22442/30-1
P/N H765AS289-1

Branched, six conductor, stranded, teflon insulation, rubber jacket. Approx. 25 inches long with a 3 inch branch. Main trunk is terminated with a U-75/U type plug and a U-173/U connector. Branch is terminated with a U-172/U connector.

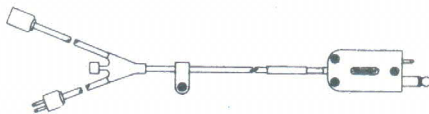


CX-13164/A
8475-01-140-3501
MIL-DTL-22442/30-2
P/N H765AS289-2

Straight, two conductor, stranded, rubber insulation, rubber jacket. Terminated with U-173/U connectors.




MIL-DTL-22442/36

Consists of two, three, and five conductor, rubber insulation, rubber jacket. Two and three conductor cables are connected by a molded junction employing a molded microphone connector. The five conductor joins the three conductor cable in a molded bailout connector, terminating in spade terminals. The other end terminates in ring terminals.

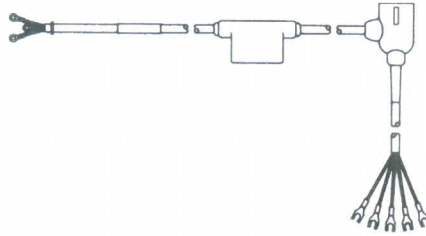


CX-8652A/GR
5995-00-051-3088
P/N H123E505-1

Five conductor, stranded, rubber insulation, rubber jacket. Terminated with a quick disconnect molded rubber connector. Used as the main cable on the H-173 Headset.

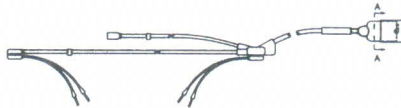

P/N H136D807

Main Cord: Stranded, rubber insulation, rubber jacket. Overall length approx. 25 inches. Terminated by transformer plug. Shell of plug is protected by rubber molding. Plug tip: Mil. type PJ-054. Leads: Four single conductor, rubber insulation, approx. 14 inches tip to tip. Protected at junction of leads and main cord by rubber molding. Terminated with pins covered by rubber molding to form a waterproof tip. Transformer: Isolating impedance matching type. Frequency Response: 200-6000 Hz. Impedance: Low - 7.5 Ohms High - 600 Ohms

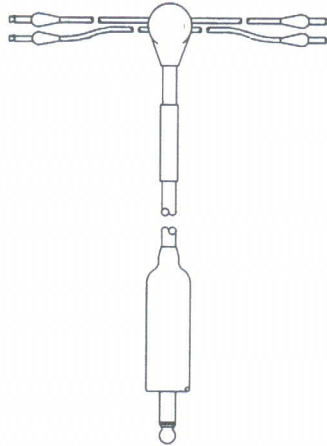

P/O H-87B/U
5995-00-549-7819
MIL-DTL-18266
P/N H1001