




1		2		3		4		5		6	
TECHNICAL SPECIFICATION		METERIAL				FINISH					
FREQUENCY RANGE	DC~18GHz	Inner conductor	Beryllium copper	Gold							
IMPEDANCE	≥5000MΩ	Insulator	PEI	—							
OPERATING TEMP	-55℃~+70℃	Body	Stainless steel 303	Passivated							
VSWR	1.10+0.01F(GHz)	Nut	Stainless steel 303	Passivated							

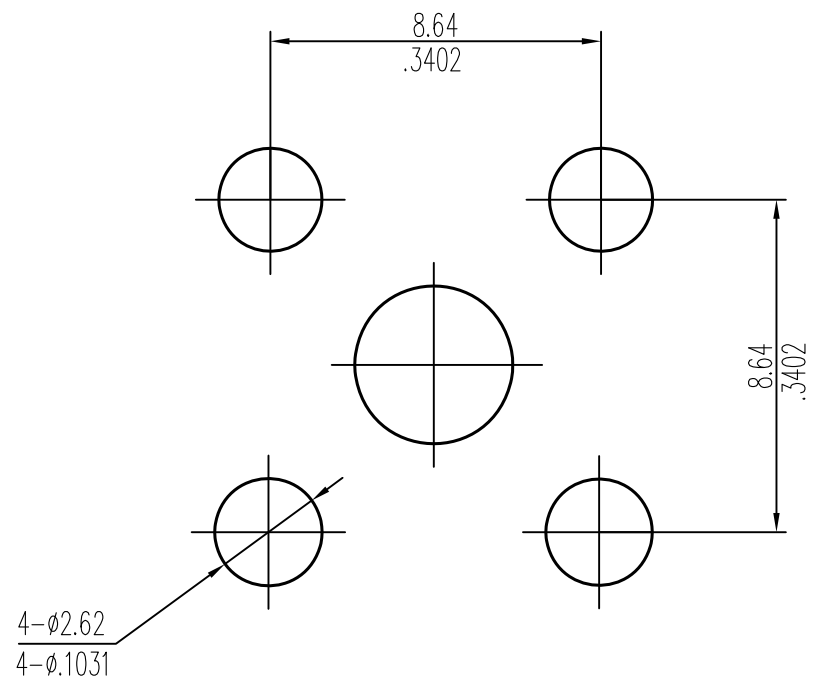

PROPRIETARY
THE INFORMATION CONTAINED IN THIS DRAWING
IS THE SOLE PROPERTY OF LANJIAN, INC.
WITHOUT THE WRITTEN PERMISSION OF
LANJIAN ELECTRONICS, INC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED
1) ALL DIMENSIONS ARE AFTER PLATING.
2) BREAK CORNERS & EDGES.005 R. MAX.
3) CHAM. 1ST & LAST THREADS.
4) SURFACE ROUGHNESS 63 √ MIL-STD-10.
5) DIA S ON COMMON CENTERS TO BE
CONCENTRIC WITHIN .004 T.I.R.
6) REMOVE ALL BURRS

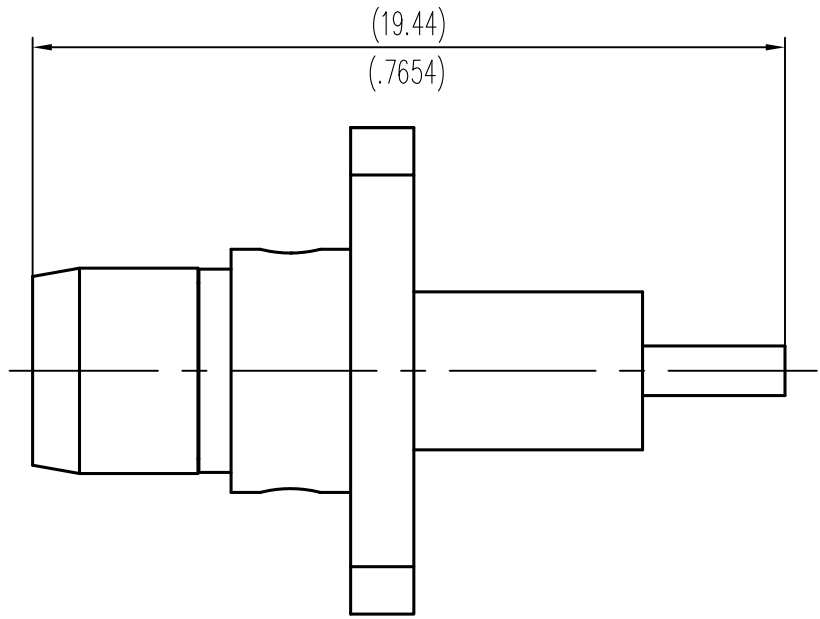

DRAWN:
CHECKED:
STANDARDIZATION:
APPROVED:

DWG.NO. BMA-MFD
TITLE: SIZE 5:1
CAGE CODE: SHEET 1/1