


Capacity 15 - 500 ton / Max. Working Pressure 700 bar

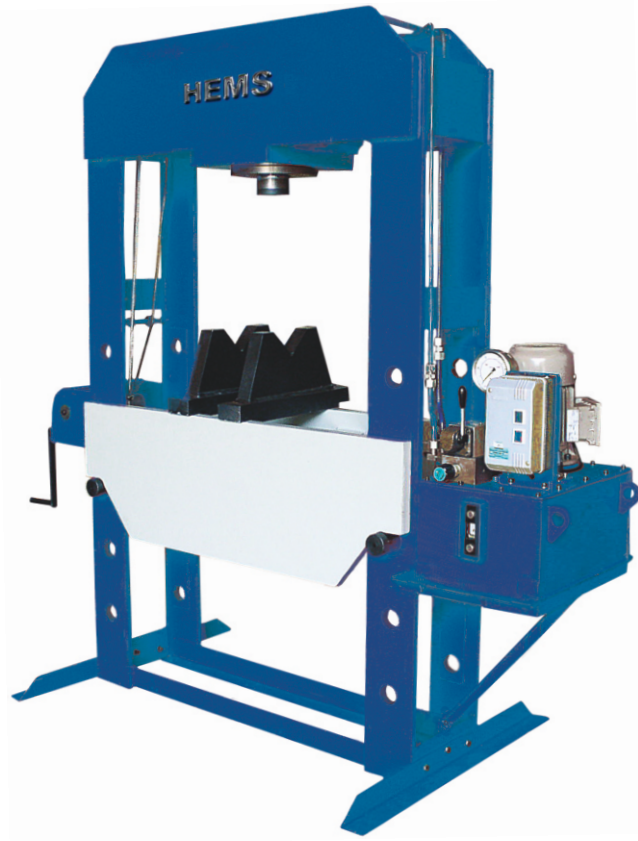

Features


- Press structures are aesthetically fabricated from Prime steel
- For 100t and above Chain mechanism attached to the main cylinder for table height adjustment
- Hand pump / motorized power pack (optional)
- Double acting cylinder type option available for 15t - 75t at extra cost

Accessories

- Calibrated pressure gauge
- Pair of "V" blocks
- One pushing adaptor

Application

- For removal and fitment of bearing, sprockets, gears, straightening of shafts and general maintenance

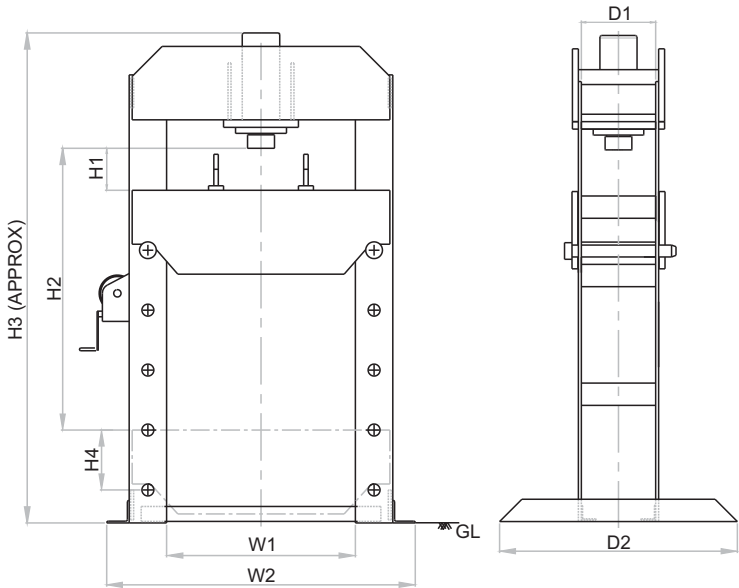

HE-VP Series - HE HEMS V Vertical P Press 15 Capacity - ton 150 Stroke - mm

Capacity (ton)	Capacity (kN)	Stroke (mm)	Model	Day light		Total height H3 (mm)	Hole pitch H4 (mm)	Table width W1 (mm)	Total width W2 (mm)	Depth		Cylinder type	Table adjustment mechanism	Wt. (Approx.) (kg)	Pump Type
				Min. H1 (mm)	Max. H2 (mm)					D1 (mm)	D2 (mm)				
15	167	150	HE-VP 15-150	150	600	1155	150	500	740	200	500	Single Acting	Manual	155	Hand Pump
30	309	150	HE-VP 30-150	150	750	1445	150	600	900	220	600	Single Acting	Winch	280	Hand Pump
50	550	150	HE-VP 50-150	150	900	1770	150	750	1130	250	750	Single Acting	Winch	425	Hand Pump
75	792	200	HE-VP 75-200	200	950	1855	150	900	1310	280	900	Single Acting	Winch	580	Hand Pump
100	1077	200	HE-VP 100-200	250	1000	2030	150	1000	1450	320	1010	Double Acting	Chain	1070	Power Pack
150	1589	300	HE-VP 150-300	300	1050	2275	250	1250	1810	380	1120	Double Acting	Chain	1500	Power Pack
200	2199	300	HE-VP 200-300	300	1050	2430	250	1250	1930	450	1350	Double Acting	Chain	2350	Power Pack
300	3000	300	HE-VP 300-300	250	1000	2525	250	1250	1880	500	1500	Double Acting	Chain	3900	Power Pack
500	4948	300	HE-VP 500-300	250	1000	2720	250	1250	1940	500	1500	Double Acting	Chain	4900	Power Pack

■ Higher capacity and customized solutions on request. ■ Specifications are subject to change due to continual improvement.
 ■ Capacity and Stroke specified are maximum safe limits. As safe practice, use at 80% of rating.