




Comfortable Seats

Standard models come with two-passenger bucket seating. Seating options include:

Bench Seating can be dealer-installed to carry up to three occupants on the 3200 and 3400. The 3400XL model can carry up to six occupants depending on your seat configuration.

3-Point Belt provides comfort with a suspension mount at the top of the shoulder harness for additional comfort when traveling over rough terrain.

Convenient Cargo Box

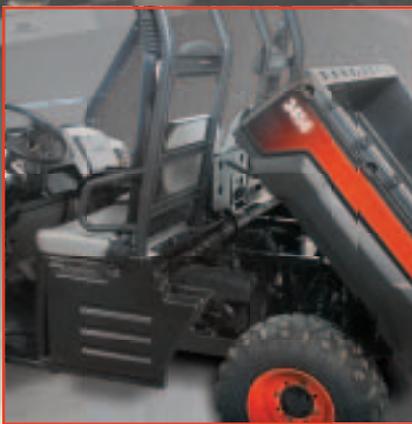

The Bobcat cargo box helps you haul supplies and material with ease.

- Single latch allows you to open the tailgate with one hand
- Tilt cargo box with Lift Assist makes lifting the cargo box easier
- Optional powered lift accessory allows you to easily lift the cargo box – at the touch of a button from your driver's seat – to dump a full load
- One-piece construction means easy clean-out
- Tie-down points located inside the cargo box keep your load secure
- Integrated Accessory System makes it easy to outfit your vehicle for specific jobs

Composite Construction

The composite cargo box on Bobcat utility vehicles stands up to tough loads, retains its strength and still looks good after years of use.



Specifications



Vehicle	3200 4x2	3400 4x4	3400XL 4x4	3450 4x4
Overall Length	113 in. (2870 mm)	113 in. (2870 mm)	144.7 in. (3676 mm)	145 in. (3684 mm)
Width	60 in. (1524 mm)	60 in. (1524 mm)	60 in. (1524 mm)	60 in. (1524 mm)
Height	75 in. (1905 mm)	75 in. (1905 mm)	75 in. (1905 mm)	75 in. (1905 mm)
Operating Weight	1375 lb. (624 kg) Gas	1440 lb. (653 kg) Gas 1610 lb. (730 kg) Diesel	1673 lb. (759 kg) Gas 1880 lb. (853 kg) Diesel	1847 lb. (842 kg) Diesel
Travel Speed, High (forward)	30 mph (48 kmh)	30 mph (48 kmh)	30 mph (48 kmh)	30 mph (48 kmh)
Travel Speed, Low (forward)	24 mph (39 kmh) Gas	24 mph (39 kmh) Gas 14 mph (23.5 kmh) Diesel	26 mph (42 kmh) Gas 14 mph (23.5 kmh) Diesel	14 mph (23.5 kmh) Diesel
Travel Speed, Reverse	24 mph (39 kmh) Gas	24 mph (39 kmh) Gas 16 mph (26 kmh) Diesel	26 mph (42 kmh) Gas 16 mph (26 kmh) Diesel	16 mph (26 kmh) Diesel
Wheel Base	76 in. (1930 mm)	76 in. (1930 mm)	106 in. (2688 mm)	76 in. (1930 mm)
Tread Width (front/rear)	48 in. (1219 mm) 49 in. (1245 mm)	48 in. (1219 mm) 49 in. (1245 mm)	48 in. (1219 mm) 49 in. (1245 mm)	48 in. (1219 mm) 49 in. (1245 mm)
Ground Clearance	9.5 in. (241 mm)	9.5 in. (241 mm)	9.5 in. (241 mm)	9.5 in. (241 mm)
Turning Radius	122 in. (3099 mm)	122 in. (3099 mm)	153 in. (3886 mm)	122 in. (3099 mm)
Engine				
Fuel	Gas	Gas / Diesel	Gas / Diesel	Diesel
Horsepower	29 HP (21.6 kW) Gas	32 HP (23.9 kW) Gas 24.8 HP (18.5 kW) Diesel	32 HP (23.9 kW) Gas 24.8 HP (18.5 kW) Diesel	24.8 HP (18.5 kW) Diesel
Displacement	27.8 in ³ (455 cc) Gas	30.4 in ³ (498 cc) Gas 35.6 in ³ (904 cc) Diesel	30.4 in ³ (498 cc) Gas 35.6 in ³ (904 cc) Diesel	35.6 in ³ (904 cc) Diesel
Injection	Carb - Gas	EFI - Gas Indirect - Diesel	EFI - Gas Indirect - Diesel	Indirect - Diesel
Cooling	Liquid	Liquid	Liquid	Liquid
Fuel Tank Capacity	9 gal. (34.1 L)	9 gal. (34.1 L)	9 gal. (34.1 L)	9 gal. (34.1 L)
Cargo Box & Vehicle Capacities				
Cargo Box Length	36.5 in. (927 mm)	36.5 in. (927 mm)	36.5 in. (927 mm)	36.5 in. (927 mm)
Width	54 in. (1372 mm)	54 in. (1372 mm)	54 in. (1372 mm)	54 in. (1372 mm)
Height	11.5 in. (292 mm)	11.5 in. (292 mm)	11.5 in. (292 mm)	11.5 in. (292 mm)
Cargo Box Load Height	31 in. (787 mm)	31 in. (787 mm)	31 in. (787 mm)	31 in. (787 mm)
Cargo Box Load (Maximum)	1100 lb. (499 kg)	1100 lb. (499 kg)	1100 lb. (499 kg)	1100 lb. (499 kg)
Vehicle Rated Capacity (includes cargo box load, weight of occupants, and the weight of any accessories – including cab kits)	1600 lb. (726 kg)	1600 lb. (726 kg)	1600 lb. (726 kg)	1600 lb. (726 kg)
Towing Capacity	1500 lb. (680 kg)	1500 lb. (680 kg)	1500 lb. (680 kg)	1500 lb. (680 kg)
RapidLink™ Attachment System	-	-	-	500 lb. (227 kg)
Lift Height	-	-	-	24 in. (610 mm)
Vehicle Features				
Steel Frame	Std.	Std.	Std.	Std.
Lockable Rear Differential	Std.	Std.	Std.	Std.
Four Wheel Drive	-	Std.	Std.	Std.
Gear Selector, R-N-L-H	Std.	Std.	Std.	Std.
Front Suspension, MacPherson Strut	Std.	Std.	Std.	Std.
Rear Suspension, Double A-Arm	Std.	Std.	Std.	Std.
Brush Guard	Opt.	Opt.	Opt.	-
Cargo Box with Power Lift Assist	Opt.	Opt.	Opt.	Std.
Sealed CVT Cover	Std.	Std.	Std.	Std.
Headlights	Std.	Std.	Std.	Std.
Tail/Brake Lights	Std.	Std.	Std.	Std.
Work Lights/Strobe Lights/Turn Signals	Opt.	Opt.	Opt.	Opt.
Power Steering	-	Opt.	Opt.	Std.
Speed Kits	-	Opt.	Opt.	Opt.
RapidLink™ Attachment System	-	-	-	Std.
Operator Area Features				
Headrests	Std.	Std.	Std.	Std.
Park Brake	Std.	Std.	Std.	Std.
Beverage Holders	Std.	Std.	Std.	Std.
Storage Compartment with Door	Std.	Std.	Std.	Std.
Tilt Steering	Std.	Std.	Std.	Std.
Dash-Mounted Hour Meter	Std.	Std.	Std.	Std.
12V Power Outlet	-	Std.	Std.	Std.
3-point Seat Belts with Comfort Strap	Std.	Std.	Std.	Std.
4-point ROPS (rollover protective structure)	Std.	Std.	Std.	Std.
Gear Position Indicator Light	Std.	Std.	Std.	Std.
Park Brake Indicator Light	Std.	Std.	Std.	Std.
Radio and Speakers	Opt.	Opt.	Opt.	Opt.



Training Resources

Train operators and technicians in the safe operation and servicing of Bobcat equipment. Operator training courses, safety videos and other training materials are available at your Bobcat dealer's parts department or online at www.bobcat.com/training